

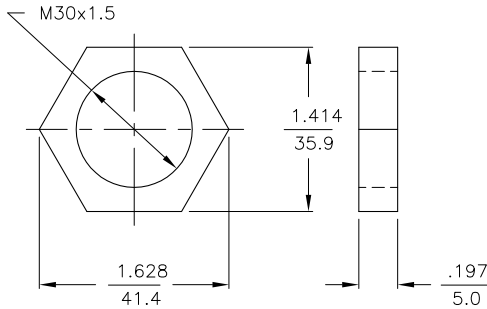
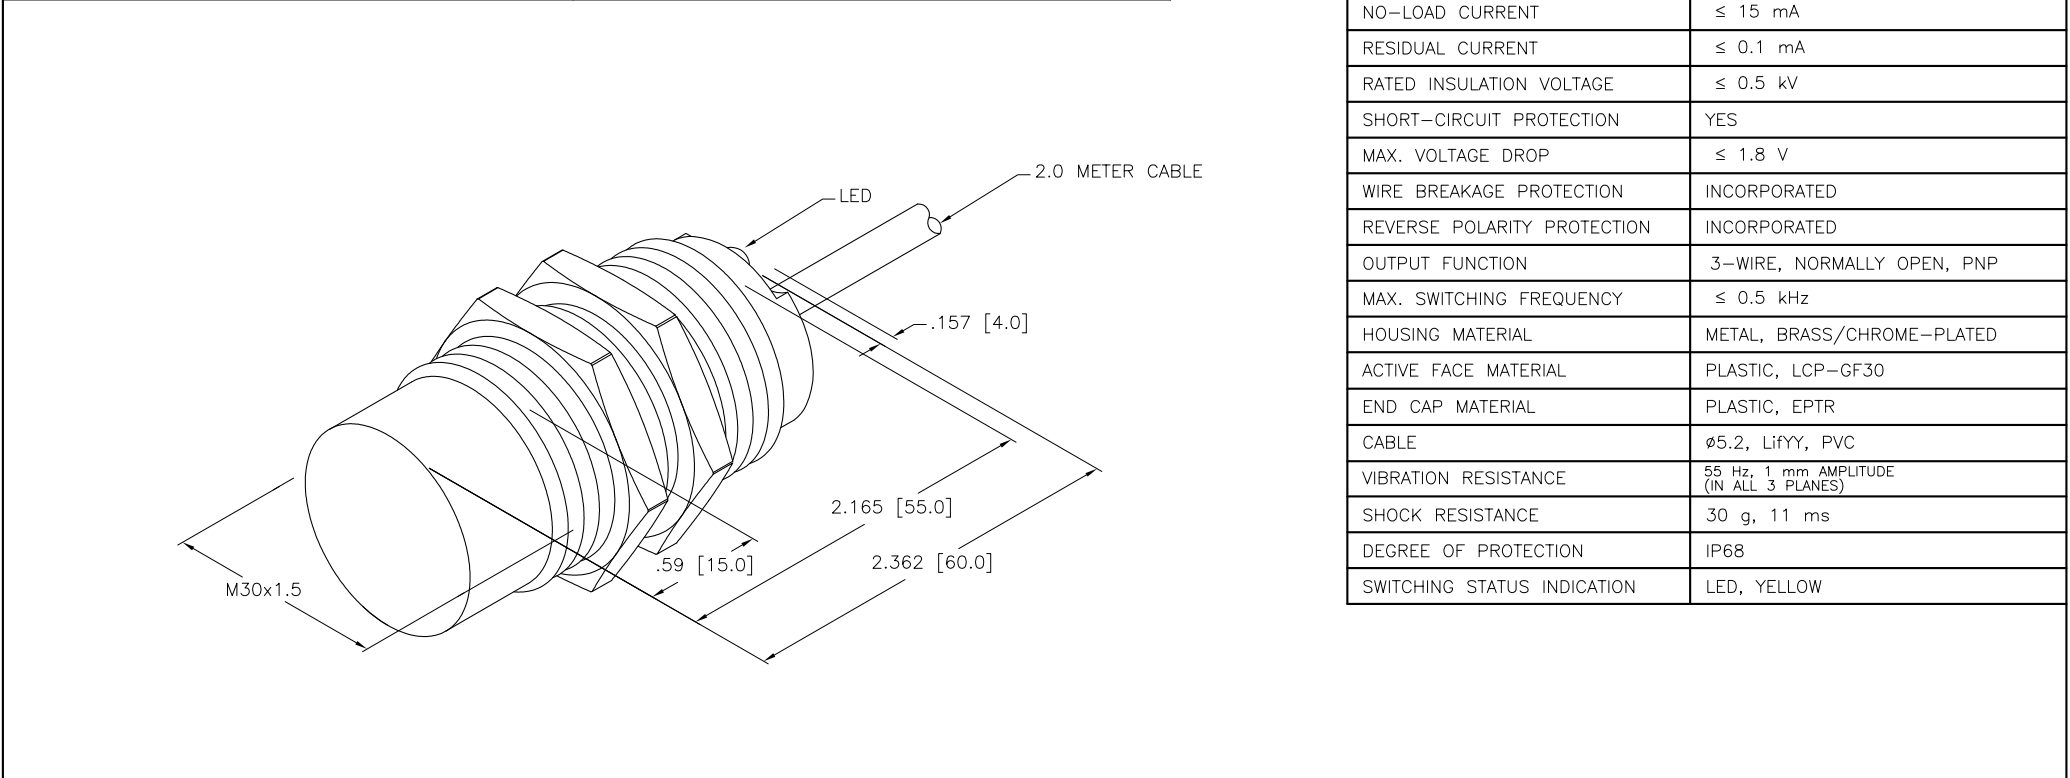


WIRING DIAGRAMS		LOCKNUT LN-M30		SPECIFICATIONS																			
				<table><tr><td>RATED OPERATING DISTANCE</td><td>30mm = 1.181"</td></tr><tr><td>MOUNTING MODE</td><td>NON-FLUSH</td></tr><tr><td>MIN. REPEAT ACCURACY</td><td>≤ 2%</td></tr><tr><td>TEMPERATURE DRIFT</td><td>≤ ±10% ≤ ±15%, ≤ -25°C v ≥ +70°C</td></tr><tr><td>HYSTERESIS</td><td>3-15%</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-30°C to +85°C (-22°F to +185°F)</td></tr><tr><td>RATED OPERATIONAL VOLTAGE</td><td>10-30 VDC</td></tr><tr><td>RESIDUAL RIPPLE</td><td>≤ 10%</td></tr><tr><td>DC RATED OPERATIONAL CURRENT</td><td>≤ 200 mA</td></tr></table>		RATED OPERATING DISTANCE	30mm = 1.181"	MOUNTING MODE	NON-FLUSH	MIN. REPEAT ACCURACY	≤ 2%	TEMPERATURE DRIFT	≤ ±10% ≤ ±15%, ≤ -25°C v ≥ +70°C	HYSTERESIS	3-15%	OPERATING TEMPERATURE	-30°C to +85°C (-22°F to +185°F)	RATED OPERATIONAL VOLTAGE	10-30 VDC	RESIDUAL RIPPLE	≤ 10%	DC RATED OPERATIONAL CURRENT	≤ 200 mA
RATED OPERATING DISTANCE	30mm = 1.181"																						
MOUNTING MODE	NON-FLUSH																						
MIN. REPEAT ACCURACY	≤ 2%																						
TEMPERATURE DRIFT	≤ ±10% ≤ ±15%, ≤ -25°C v ≥ +70°C																						
HYSTERESIS	3-15%																						
OPERATING TEMPERATURE	-30°C to +85°C (-22°F to +185°F)																						
RATED OPERATIONAL VOLTAGE	10-30 VDC																						
RESIDUAL RIPPLE	≤ 10%																						
DC RATED OPERATIONAL CURRENT	≤ 200 mA																						
OUTPUT: AP6X																							
SHORT-CIRCUIT AND OVERLOAD PROTECTED																							



NOTES: 1. UPROX HAS WELD FIELD IMMUNITY, SENSOR IS SUITABLE FOR USE ON RESISTANCE MACHINES.				SOURCE DRAWING - FOR REFERENCE ONLY			
RELATED DOCUMENTS				3RD ANGLE PROJECTION 			
MATERIAL				THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			
FINISH				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY				DRFT RDS DATE 09/14/07 DESCRIPTION NI30U-M30-AP6X			
CONTACT TURCK FOR MORE INFORMATION				DSGN AF SCALE 1=1.0			
UNIT OF MEASUREMENT INCH [MILLIMETER]				IDENTIFICATION NO. M1646630 REV A			
DO NOT SCALE THIS DRAWING				FILE: M1646630 SHEET 1 OF 1			
A DRAWING RELEASE RDS 09/14/07							
REV DESCRIPTION BY DATE ECO NO.							