


General Purpose Transistor **multicomp**



Pin Configuration:

1. Base
2. Collector
3. Emitter

Description:

- General Purpose NPN Silicon Planar Epitaxial Amplifier Transistors.

Absolute Maximum Ratings

Parameter	Symbol	Value	Units
Collector-Emitter Voltage	V_{CEO}	50	V
Collector-Base Voltage	V_{CBO}	60	
Emitter-Base Voltage	V_{EBO}	6	
Collector Current Continuous	I_C	100	mA
Power Dissipation at $T_a = 25^\circ\text{C}$ Derate Above 25°C	P_D	350 2.8	mW $\text{mW}/^\circ\text{C}$
Total Device Dissipation at $T_c = 25^\circ\text{C}$ Derate Above 25°C		1 8	W $\text{mW}/^\circ\text{C}$
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	- 55 to + 150	

Thermal Resistance

Junction to Ambient	$R_{th(j-a)}$	375	$^\circ\text{C}/\text{W}$
Junction to Case	$R_{th(j-c)}$	125	

General Purpose Transistor **multicomp**

Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Collector-Emitter Voltage	V_{CEO}	$I_C = 2\text{mA}, I_B = 0$	50	-	-	V
Collector-Base Voltage	V_{CBO}	$I_C = 10\mu\text{A}, I_E = 0$	60	-	-	
Emitter-Base Voltage	V_{EBO}	$I_E = 100\mu\text{A}, I_C = 0$	6	-	-	
Collector Cut off Current	I_{CBO}	$V_{CB} = 50\text{V}, I_E = 0$	-	-	15	nA
Emitter-Base Leakage Current	I_{EBO}	$V_{EB} = 4.0\text{V}, I_C = 0$	-	-		
DC Current Gain	h_{FE}	$I_C = 2\text{mA}$ BC182L	125	-	-	-
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 10\text{mA}, I_B = 0.5\text{mA}$ $*I_C = 100\text{mA}, I_B = 5\text{mA}$	-	-	0.25 0.6	V
Base-Emitter Saturation Voltage	$V_{BE(\text{sat})}$	$*I_C = 100\text{mA}, I_B = 5\text{mA}$	-	-	1.2	-
Base-Emitter On Voltage	$V_{BE(\text{on})}$	$I_C = 100\mu\text{A}, V_{CE} = 5\text{V}$ $I_C = 2\text{mA}, V_{CE} = 5\text{V}$ $*I_C = 100\text{mA}, V_{CE} = 5\text{V}$	0.55	0.5 0.83	0.7	-

Dynamic Characteristics

Current-Gain Bandwidth Product	f_T	$I_C = 0.5\text{mA}, V_{CE} = 3\text{V}, f = 100\text{MHz}$ $I_C = 10\text{mA}, V_{CE} = 5\text{V}, f = 100\text{MHz}$	150	100	-	MHz
Common Base Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}, I_C = 0, f = 1\text{MHz}$	-	-	5	pF
Common Base Input Capacitance	C_{ib}	$V_{BE} = 0.5\text{V}, I_C = 0, f = 1\text{MHz}$	-	8	-	pF
Small-Signal Current Gain	h_{fe}	$I_C = 2\text{mA}, V_{CE} = 5\text{V}, f = 1\text{kHz}$	125	-	500	-
Noise Figure	NF	$V_{CE} = 5\text{V}, I_C = 0.2\text{mA}, R_s = 2\text{K}\Omega, f = 1\text{kHz}, F = 200\text{Hz}$	-	-	10	dB

*Pulse Condition : Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

General Purpose Transistor **multicomp**

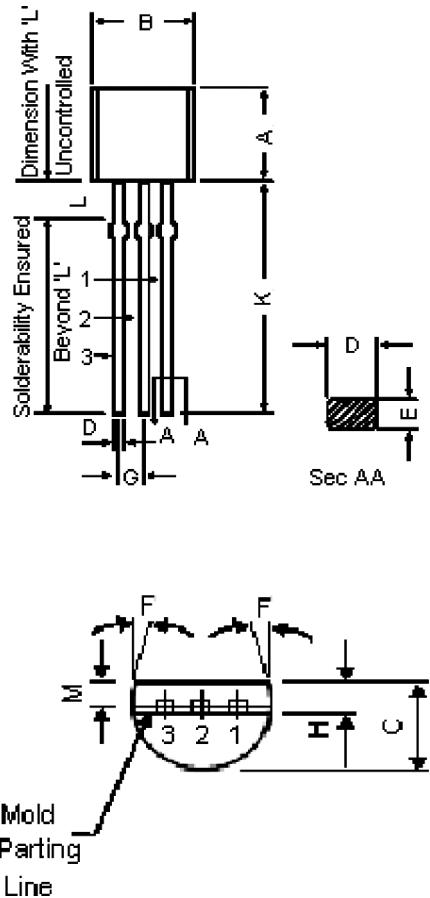

Dimensions	Min.	Max.
A	4.32	5.33
B	4.45	5.2
C	3.18	4.19
D	0.41	0.55
E	0.35	0.5
F	5°	
G	1.14	1.4
H	1.2	
K	12.7	-
L	1.982	2.082
M	1.03	1.2

Dimensions : Millimetres

Pin Configuration:

1. Base
2. Collector
3. Emitter

Part Number Table

Description	Part Number
Transistor, NPN, TO-92	BC182L

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.