

## TPS1H100-Q1 40-V, 100-mΩ Single-Channel Smart High-Side Power Switch

### 1 Features

- Qualified for Automotive Applications
- AEC-Q100 Qualified With the Following Results:
  - Device Temperature Grade 1:  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  Ambient Operating Temperature Range
  - Device HBM ESD Classification Level H3A
  - Device CDM ESD Classification Level C4B
- Single-Channel Smart High-Side Power Switch With Full Diagnostics
  - Version A: Open-Drain Status Output
  - Version B: Current Sense Analog Output
- Wide Operating Voltage 3.5 to 40 V
- Very-Low Standby Current,  $<0.5\text{ }\mu\text{A}$
- Operating Junction Temperature,  $-40$  to  $150^{\circ}\text{C}$
- Input Control, 3.3-V and 5-V Logic Compatible
- High-Accuracy Current Sense,  $\pm 30\text{ mA}$  at 1 A,  $\pm 4\text{ mA}$  at 5 mA
- Programmable Current Limit With External Resistor,  $\pm 20\%$  at 0.5 A
- Diagnostic Enable Function for Multiplexing of MCU Analog or Digital Interface
- Tested According to AECQ100-12 Grade A, 1 Million Times Short to GND Test
- Electrical Transient Disturbance Immunity Certification of ISO7637-2 and ISO16750-2
- Protection
  - Overload and Short-Circuit Protection
  - Inductive Load Negative Voltage Clamp
  - Undervoltage Lockout (UVLO) Protection
  - Thermal Shutdown/Swing With Self Recovery

- Loss of GND, Loss of Supply Protection
- Reverse Battery Protection With External Circuitry
- Diagnostic
  - On/Off State Output Open/Short to Battery Detection
  - Overload and Short to Ground Detection and Current Limit
  - Thermal Shutdown/Swing Detection
- 14-Pin Thermally-Enhanced PWP Package

### 2 Applications

- High-Side Power Switch for Sub-Module
- Low-Wattage Lamp Power Switch
- High-Side Relay/Solenoids
- PLC Digital Output Power Switch
- General Resistive, Inductive, and Capacitive Loads

### 3 Description


The TPS1H100-Q1 is a fully protected high-side power switch, with integrated NMOS power FET and charge pump, targeted for the intelligent control of the variable kinds of resistive, inductive, and capacitive loads. Accurate current sense and programmable current limit features differentiate it from the market.

#### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TPS1H100-Q1	HTSSOP (14)	4.40 mm x 5.00 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

### 4 Typical Application Schematic

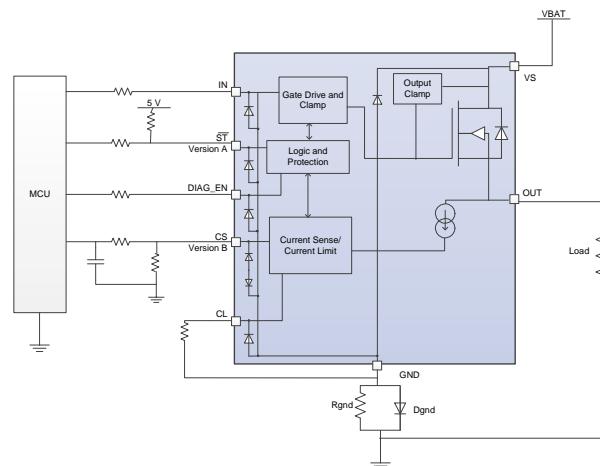

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

## Table of Contents

<b>1</b>	<b>Features</b>	<b>1</b>	8.2	Functional Block Diagram	16
<b>2</b>	<b>Applications</b>	<b>1</b>	8.3	Feature Description	16
<b>3</b>	<b>Description</b>	<b>1</b>	8.4	Device Functional Modes	31
<b>4</b>	<b>Typical Application Schematic</b>	<b>1</b>	<b>9</b>	<b>Application and Implementation</b>	<b>32</b>
<b>5</b>	<b>Revision History</b>	<b>2</b>	9.1	Application Information	32
<b>6</b>	<b>Pin Configuration and Functions</b>	<b>3</b>	9.2	Typical Application	32
<b>7</b>	<b>Specifications</b>	<b>4</b>	<b>10</b>	<b>Power Supply Recommendations</b>	<b>37</b>
7.1	Absolute Maximum Ratings	4	<b>11</b>	<b>Layout</b>	<b>37</b>
7.2	ESD Ratings	5	11.1	Layout Guidelines	37
7.3	Recommended Operating Conditions	5	11.2	Layout Example	37
7.4	Thermal Information	5	11.3	Thermal Considerations	38
7.5	Electrical Characteristics	6	<b>12</b>	<b>Device and Documentation Support</b>	<b>39</b>
7.6	Timing Requirements – Current Sense Characteristics	8	12.1	Community Resources	39
7.7	Switching Characteristics	9	12.2	Trademarks	39
7.8	Typical Characteristics	11	12.3	Electrostatic Discharge Caution	39
<b>8</b>	<b>Detailed Description</b>	<b>15</b>	12.4	Glossary	39
8.1	Overview	15	<b>13</b>	<b>Mechanical, Packaging, and Orderable Information</b>	<b>39</b>


## 5 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (January 2015) to Revision B	Page
• Updated <a href="#">Figure 6</a> and <a href="#">Figure 7</a>	10
• Updated <a href="#">Figure 38</a>	25
• Updated <a href="#">Figure 39</a>	26
• Updated <a href="#">Figure 40</a>	27
• Added <a href="#">Community Resources</a>	39

Changes from Original (October 2014) to Revision A	Page
• Updated device status from preview to production data	1

## 6 Pin Configuration and Functions

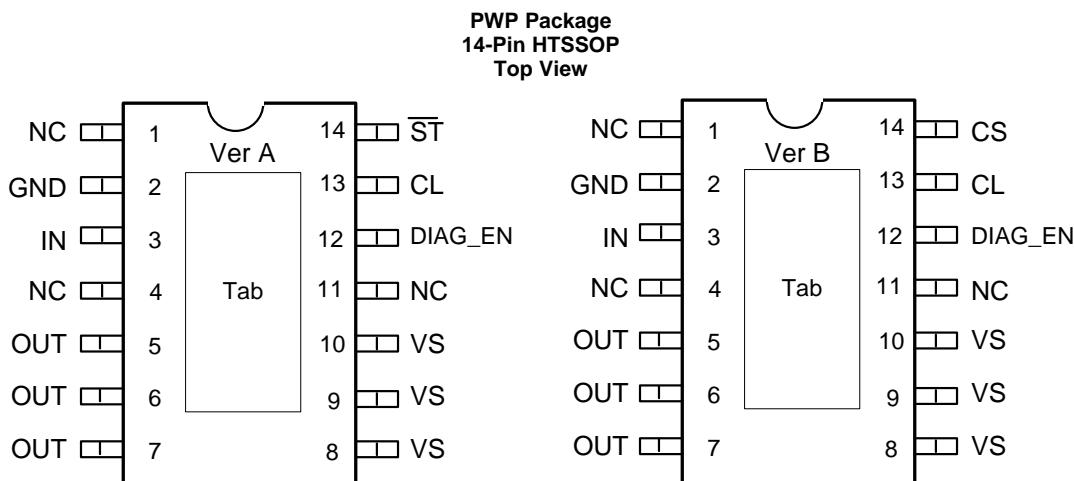


### Pin Functions

PIN		I/O	DESCRIPTION	
NAME	NO.			
NC	1	—	No connect pin	Floating
	4			
	11			
GND	2	—	Ground pin	
IN	3	I	Input control for channel activation	
OUT	5	O	Output, connected to load (NMOS source)	
	6			
	7			
VS	8	I	Power supply; battery voltage	
	9			
	10			
DIAG_EN	12	I	Enable/disable pin for diagnostic functions	Connect to device GND if not used
CL	13	O	Programmable current limit pin	Connect to device GND if external current limit is not used
CS	14 <sup>(1)</sup>	O	Current sense output	Floating if not used
ST	14 <sup>(2)</sup>	O	Open-drain diagnostic status output	Floating if not used
Tab	—	—	Thermal pad	Connect to device GND or floating

(1) Version B

(2) Version A

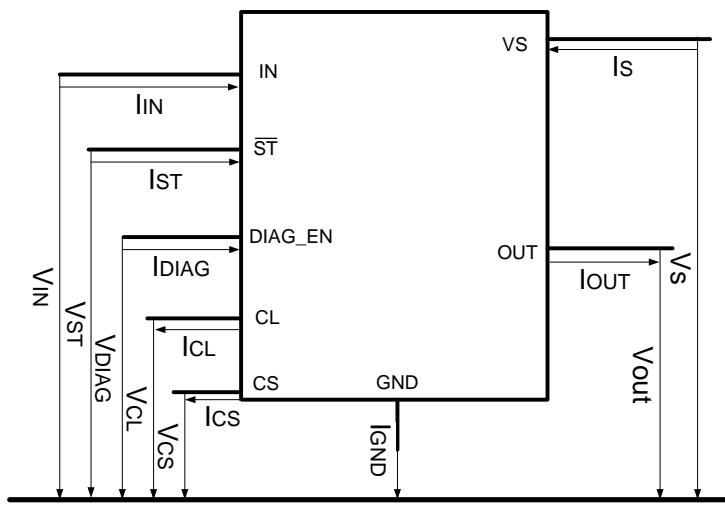
**Figure 1. Pin Current and Voltage Conventions**

## 7 Specifications

### 7.1 Absolute Maximum Ratings

 over operating free-air temperature range (unless otherwise noted) <sup>(1)(2)(3)</sup>

	MIN	MAX	UNIT
Supply voltage <sup>(4)</sup> , t < 400 ms		48	V
Reverse polarity voltage <sup>(5)</sup>	-18		V
Continuous drain current	Internally limited		A
Reverse current on GND	-50	20	mA
Reverse current on GND, t < 120 s	-250	20	mA
Voltage on IN/DIAG_EN pin	-0.3	7	V
Current on IN /DIAG_EN pin	-30	2	mA
Voltage on $\overline{ST}$ pin	-0.3	7	V
Current on $\overline{ST}$ pin	-30	10	mA
IN pin PWM frequency		2	KHz
Voltage on CL pin	-0.3	7	V
Current on CL pin	-2	30	mA
Voltage on CS pin	-2.7	6.5	V
Current on CS pin	-2	30	mA
Inductive load switch-off energy dissipation single pulse <sup>(6)</sup>		70	mJ
Operating ambient temperature	-40	125	°C
Operating junction temperature	-40	150	°C
Storage temperature, $T_{stg}$	-65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to GND.
- (3) Absolute negative voltage on these terminals is not to go below -0.3 V.
- (4) Absolute maximum voltage, withstand 48-V load dump voltage for 400 ms.
- (5) Reverse polarity condition: t < 60 s, reverse current < Irev1, GND pin 1-kΩ resistor in parallel with diode.
- (6) Test condition:  $V_S = 13.5$  V,  $L = 8$  mH,  $R = 0$  Ω,  $T_J = 150^\circ\text{C}$ . FR4 2s2p board, 2- × 70-μm Cu, 2- × 35-μm Cu. 600-mm<sup>2</sup> thermal pad copper area.

## 7.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM) AEC-Q100 Classification Level H3A <sup>(1)</sup>	VS, OUT, GND	±5000
		Human body model (HBM) AEC-Q100 Classification Level H2 <sup>(1)</sup>	Other pins	±4000
		Charged device model (CDM), per AEC Q100-011 <sup>(2)</sup>		±750

(1) The human-body model is a 107-pF capacitor discharged through a 1.5-kΩ resistor into each terminal.  
(2) The charged-device model is tested according to AEC\_Q100-011C.

## 7.3 Recommended Operating Conditions


over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
V <sub>S</sub>	Operating voltage	5	40	V
	Voltage on IN/DIAG_EN pin	0	5	V
	Voltage on $\overline{ST}$ pin	0	5	V
I <sub>o,nom</sub>	Nominal DC load current	0	4	A
T <sub>J</sub>	Operating junction temperature range	-40	150	°C

## 7.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TPS1H100-Q1	UNIT
		PWP (HTSSOP)	
		14 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance (2)	41	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	29.7	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	25.1	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	0.9	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	24.8	°C/W
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	2.7	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).  
(2) The thermal data is based on JEDEC standard high-K profile – JESD 51-7. The copper pad is soldered to the thermal land pattern. Also, correct attachment procedure must be incorporated.

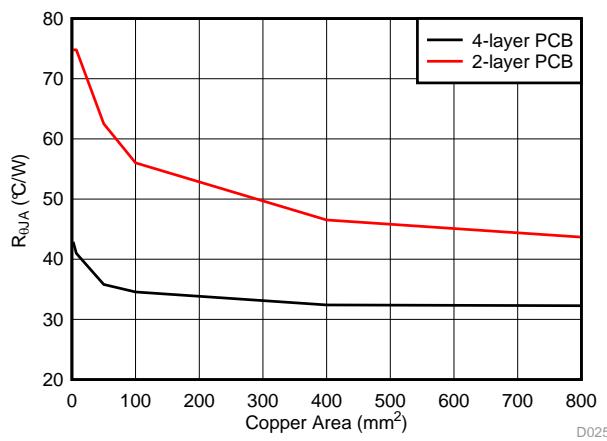

(1) 4-layer board: FR4 2s2p board, 2.8-mil copper (top/bottom), 1.4-mil copper (internal layers). 76.4- × 114.3- × 1.5-mm board size.  
(2) 2-layer board: FR4 2s0p board, 2.8-mil copper (top/bottom). 76.4- × 114.3- × 1.5-mm board size.

**Figure 2. R<sub>θJA</sub> Value vs Copper Area**

## 7.5 Electrical Characteristics

5 V <  $V_S$  < 40 V;  $-40^\circ\text{C} < T_J < 150^\circ\text{C}$  unless otherwise specified

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
<b>OPERATING VOLTAGE</b>						
$V_{S,\text{nom}}$	Nominal operating voltage	5	40		V	
$V_{S,\text{op}}$	Extended operating voltage	$R_{\text{DS-ON}}$ value increases maximum 20%, compared to 5 V, see $R_{\text{DS-ON}}$ parameter	3.5	5	V	
$V_{S,\text{UVR}}$	Undervoltage restart	$V_S$ rises up, $V_S > V_{S,\text{UVR}}$ , device turn on	3.5	3.7	4	V
$V_{S,\text{UVF}}$	Undervoltage shutdown	$V_S$ falls down, $V_S < V_{S,\text{UVF}}$ , device shuts off	3	3.2	3.5	V
$V_{\text{UV,hys}}$	Undervoltage shutdown, hysteresis		0.5		V	
<b>OPERATING CURRENT</b>						
$I_{\text{nom}}$	Nominal operating current	$V_{\text{IN}} = 5 \text{ V}$ , $V_{\text{DIAG\_EN}} = 0 \text{ V}$ , no load	5	mA		
		$V_{\text{IN}} = 5 \text{ V}$ , $V_{\text{DIAG\_EN}} = 0 \text{ V}$ , 10- $\Omega$ load	10	mA		
$I_{\text{off}}$	Standby current	$V_S = 13.5 \text{ V}$ , $V_{\text{IN}} = V_{\text{DIAG\_EN}} = V_{\text{CS}} = V_{\text{CL}} = V_{\text{OUTPUT}} = 0 \text{ V}$ , $T_J = 25^\circ\text{C}$	0.5	$\mu\text{A}$		
		$V_S = 13.5 \text{ V}$ , $V_{\text{IN}} = V_{\text{DIAG\_EN}} = V_{\text{CS}} = V_{\text{CL}} = V_{\text{OUTPUT}} = 0 \text{ V}$ , $T_J = 125^\circ\text{C}$	5	$\mu\text{A}$		
$I_{\text{off,diag}}$	Standby current with diagnostic enabled	$V_{\text{IN}} = 0 \text{ V}$ , $V_{\text{DIAG\_EN}} = 5 \text{ V}$	1.2	mA		
$t_{\text{off,deg}}$	Standby mode deglitch time <sup>(1)</sup>	IN from high to low, if deglitch time > $t_{\text{off,deg}}$ , enters into standby mode.	2	ms		
$I_{\text{leak,out}}$	Off-state output leakage current	$V_S = 13.5 \text{ V}$ , $V_{\text{IN}} = V_{\text{OUTPUT}} = 0$ , $T_J = 25^\circ\text{C}$	0.5	$\mu\text{A}$		
		$V_S = 13.5 \text{ V}$ , $V_{\text{IN}} = V_{\text{OUTPUT}} = 0$ , $T_J = 125^\circ\text{C}$	3	$\mu\text{A}$		
<b>POWER STAGE</b>						
$R_{\text{DS-ON}}$	On-state resistance	$V_S > 5 \text{ V}$ , $T_J = 25^\circ\text{C}$	80	100	$\text{m}\Omega$	
		$V_S > 5 \text{ V}$ , $T_J = 150^\circ\text{C}$	166		$\text{m}\Omega$	
		$V_S = 3.5 \text{ V}$ , $T_J = 25^\circ\text{C}$	120		$\text{m}\Omega$	
$I_{\text{lim,nom}}$	Internal current limit		7	13	A	
$I_{\text{lim,tsd}}$	Current limit during thermal shutdown	Internal current limit, thermal cycling condition	5		A	
		External current limit, thermal cycling condition; Percentage of current limit set value	50%			
$V_{\text{DS}}$	Clamp drain-to-source voltage internally clamped		50	70	V	
<b>OUTPUT DIODE CHARACTERISTICS</b>						
$V_F$	Drain-to-source diode voltage	$V_{\text{IN}} = 0$ , $I_{\text{OUT}} = -0.2 \text{ A}$	0.7		V	
$I_{\text{rev1}}$	Continuous reverse current when reverse polarity <sup>(2)</sup>	$t < 60 \text{ s}$ , $V_S = 13.5 \text{ V}$ , GND pin 1-k $\Omega$ resistor in parallel with diode. $T_J = 25^\circ\text{C}$ . See $I_{\text{rev1}}$ test condition (Figure 6).	4		A	
$I_{\text{rev2}}$	Continuous reverse current when $V_{\text{OUT}} > V_S + V_{\text{diode}}$ <sup>(2)</sup>	$t < 60 \text{ s}$ , $V_S = 13.5 \text{ V}$ , $T_J = 25^\circ\text{C}$ . See $I_{\text{rev2}}$ test condition (Figure 7).	2		A	
<b>LOGIC INPUT (IN AND DIAG_EN)</b>						
$V_{\text{logic,h}}$	Input/Diag_En high level voltage		2		V	
$V_{\text{logic,l}}$	Input/Diag_En low level voltage			0.8	V	
$V_{\text{logic,hys}}$	Input/Diag_En Hysteresis voltage		250		mV	
$R_{\text{pd,in}}$	Input pulldown resistor		500		k $\Omega$	
$R_{\text{pd,diag}}$	Diag pulldown resistor		150		k $\Omega$	

(1) Value is specified by design, not subject to production test.

(2) Value are based on the minimum value of the 10 pcs/3 lots samples.

## Electrical Characteristics (continued)

5 V <  $V_S$  < 40 V;  $-40^\circ\text{C} < T_J < 150^\circ\text{C}$  unless otherwise specified

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
<b>DIAGNOSTICS</b>						
$I_{\text{loss,gnd}}$	Loss of ground output leakage current			100	$\mu\text{A}$	
$V_{\text{ol,off}}$	Open load detection threshold in off state	$V_{\text{IN}} = 0 \text{ V}$ , When $V_S - V_{\text{OUT}} < V_{\text{ol,off}}$ , duration longer than $t_{\text{ol,off}}$ . Open load detected.	1.4	1.8	2.6	V
$I_{\text{ol,off}}$	Off-state output sink current when open load	$V_{\text{IN}} = 0 \text{ V}$ , $V_S = V_{\text{OUT}} = 13.5 \text{ V}$ , $T_J = 125^\circ\text{C}$ .		-50	$\mu\text{A}$	
$t_{\text{ol,off}}$	Open load detection threshold deglitch time in off state	$V_{\text{IN}} = 0 \text{ V}$ , When $V_S - V_{\text{OUT}} < V_{\text{ol,off}}$ , duration longer than $t_{\text{ol,off}}$ . Open load detected.		600	$\mu\text{s}$	
$I_{\text{ol,on}}$	Open load detection threshold in on state	$V_{\text{IN}} = 5 \text{ V}$ , when $I_{\text{OUT}} < I_{\text{ol,on}}$ , duration longer than $t_{\text{ol,on}}$ . Open load detected. Version A only	2	6	10	$\text{mA}$
$t_{\text{ol,on}}$	Open load detection threshold deglitch time in on state	$V_{\text{IN}} = 5 \text{ V}$ , when $I_{\text{OUT}} < I_{\text{ol,on}}$ , duration longer than $t_{\text{ol,on}}$ . Open load detected. Version A only		700	$\mu\text{s}$	
$V_{\text{ST}}$	Status low output voltage	$I_{\text{ST}} = 2 \text{ mA}$ Version A only		0.4	V	
$T_{\text{SD}}$	Thermal shutdown threshold			175	$^\circ\text{C}$	
$T_{\text{SD,rst}}$	Thermal shutdown status reset			155	$^\circ\text{C}$	
$T_{\text{sw}}$	Thermal swing shutdown threshold			60	$^\circ\text{C}$	
Thys	Hysteresis for resetting the thermal shutdown and swing			10	$^\circ\text{C}$	
<b>CURRENT SENSE (VERSION B) AND CURRENT LIMIT</b>						
K	Current sense current ratio			500		
$K_{\text{CL}}$	Current limit current ratio			2000		
dK/K	Current sense accuracy	$I_{\text{load}} \geq 5 \text{ mA}$	-80%	80%		
		$I_{\text{load}} \geq 25 \text{ mA}$	-10%	10%		
		$I_{\text{load}} \geq 50 \text{ mA}$	-7%	7%		
		$I_{\text{load}} \geq 0.1 \text{ A}$	-5%	5%		
		$I_{\text{load}} \geq 1 \text{ A}$	-3%	3%		
d $K_{\text{CL}}/K_{\text{CL}}$	External current limit accuracy	$I_{\text{limit}} \geq 0.5 \text{ A}$	-20%	20%		
		$I_{\text{limit}} \geq 1.6 \text{ A}$	-14%	14%		
$V_{\text{CS,lin}}$	Linear current sense voltage range <sup>(1)</sup>	$V_S \geq 5 \text{ V}$	0	4	V	
$I_{\text{OUT,lin}}$	Linear output current range <sup>(1)</sup>	$V_S \geq 5 \text{ V}$ , $V_{\text{CS,lin}} \leq 4 \text{ V}$	0	4	A	
$V_{\text{CS,H}}$	Current sense fault high voltage	$V_S \geq 7 \text{ V}$	4.3	4.75	4.9	
		$V_S \geq 5 \text{ V}$	Min( $V_S - 0.8$ , 4.3)		4.9	
$I_{\text{CS,H}}$	Current sense fault condition current	$V_{\text{CS}} = 4.3 \text{ V}$ , $V_S > 7 \text{ V}$	10		$\text{mA}$	
$V_{\text{CL,th}}$	Current limit internal threshold voltage <sup>(1)</sup>			1.233	V	
$I_{\text{CS,leak}}$	Current sense leakage current in disabled mode	$V_{\text{IN}} = 5 \text{ V}$ , $R_{\text{load}} = 10 \Omega$ , $V_{\text{DIAG\_EN}} = 0 \text{ V}$ , $T_J = 125^\circ\text{C}$		1	$\mu\text{A}$	
		$V_{\text{IN}} = 0 \text{ V}$ , $V_{\text{DIAG\_EN}} = 0 \text{ V}$ , $T_J = 125^\circ\text{C}$		1	$\mu\text{A}$	

## 7.6 Timing Requirements – Current Sense Characteristics<sup>(1)</sup>

			MIN	NOM	MAX	UNIT
$t_{CS,off1}$	CS settling time from DIAG disabled	$V_{IN} = 5 \text{ V}$ , $I_{load} \geq 5 \text{ mA}$ . $V_{DIAG\_EN}$ from 5 to 0 V. CS to 10% of sense value.			10	$\mu\text{s}$
$t_{CS,on1}$	CS settling time from DIAG enabled	$V_{IN} = 5 \text{ V}$ , $I_{load} \geq 5 \text{ mA}$ . $V_{DIAG\_EN}$ from 0 to 5 V. CS to 90% of sense value.			10	$\mu\text{s}$
$t_{CS,off2}$	CS settling time from IN falling edge	$V_{DIAG\_EN} = 5 \text{ V}$ , $I_{load} \geq 5 \text{ mA}$ . IN from 5 to 0 V. CS to 10% of sense value.			10	$\mu\text{s}$
		$V_{DIAG\_EN} = 5 \text{ V}$ , $I_{load} \geq 5 \text{ mA}$ . IN from 5 to 0 V. Current limit triggered.			180	$\mu\text{s}$
$t_{CS,on2}$	CS settling time from IN rising edge	$V_S = 13.5 \text{ V}$ , $V_{DIAG\_EN} = 5 \text{ V}$ , $I_{load} \geq 100 \text{ mA}$ . $V_{IN}$ from 0 to 5 V. CS to 90% of sense value.			150	$\mu\text{s}$

(1) Value specified by design, not subject to production test.

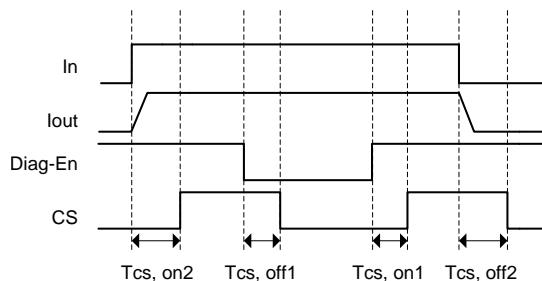


Figure 3. CS Delay Characteristics

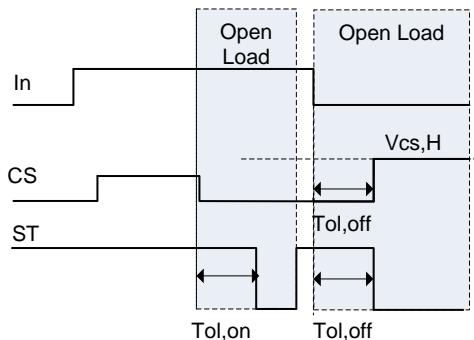



Figure 4. Open Load Blanking Time Characteristics

## 7.7 Switching Characteristics



$V_S = 13.5$  V,  $R_{load} = 10 \Omega$ , over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{d,ON}$	Turn-on delay time IN rising edge to $V_{OUT} = 10\%$ , DIAG_EN high	20	50		$\mu s$
$t_{d,OFF}$	Turn-off delay time IN falling edge to $V_{OUT} = 90\%$ , DIAG_EN high	20	50		$\mu s$
$dV/dt_{ON}$	Slew rate on $V_{OUT} = 10\%$ to $90\%$ , DIAG_EN high	0.1	0.5		$V/\mu s$
$dV/dt_{OFF}$	Slew rate off $V_{OUT} = 90\%$ to $10\%$ , DIAG_EN high	0.1	0.5		$V/\mu s$
Slew rate on and off matching		-0.15	0.15		$V/\mu s$

(1) Value specified by design, not subject to production test.

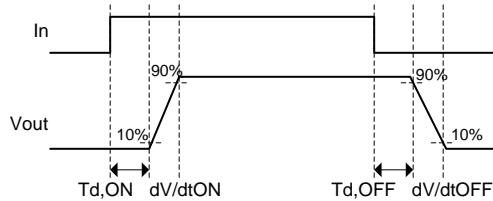


**Figure 5. Switching Characteristics Diagram**

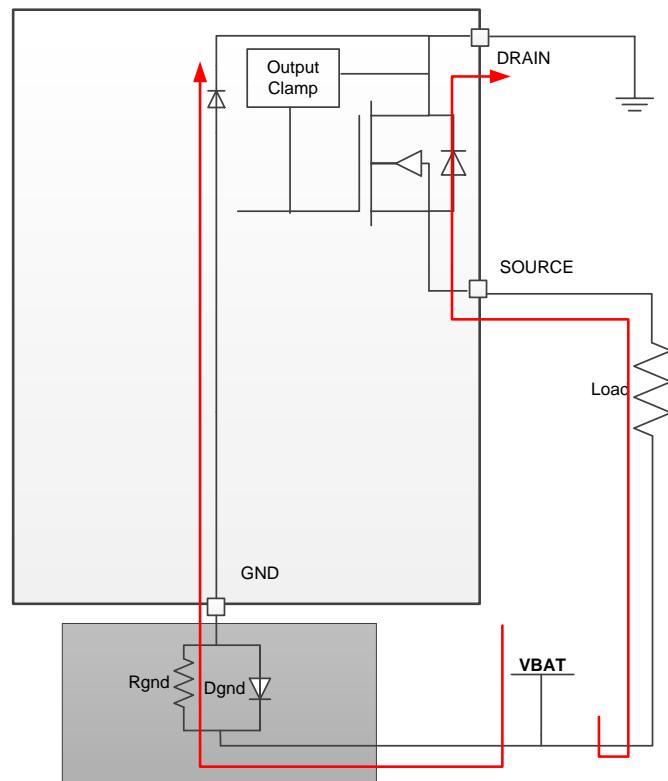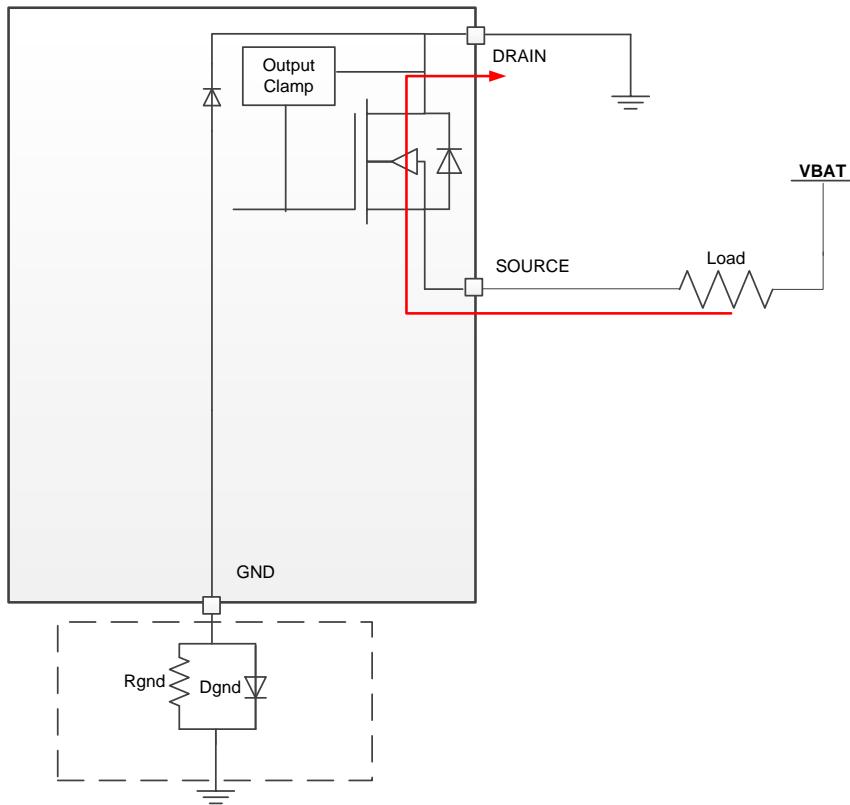

**Figure 6.  $I_{rev1}$  Test Condition**

**Figure 7.  $I_{rev2}$  Test Condition**

## 7.8 Typical Characteristics

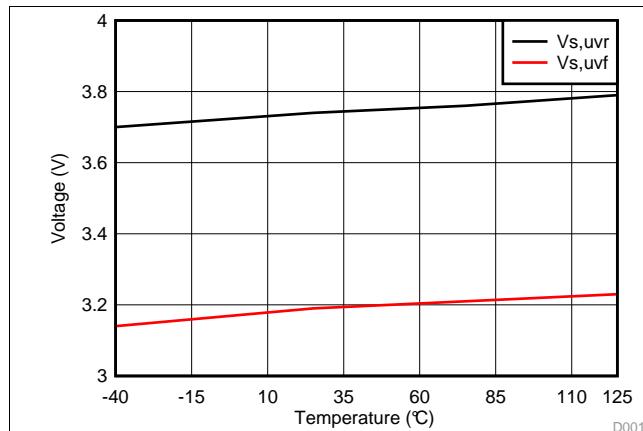
All the below data are based on the mean value of the three lots samples,  $V_S = 13.5$  V if not specified.

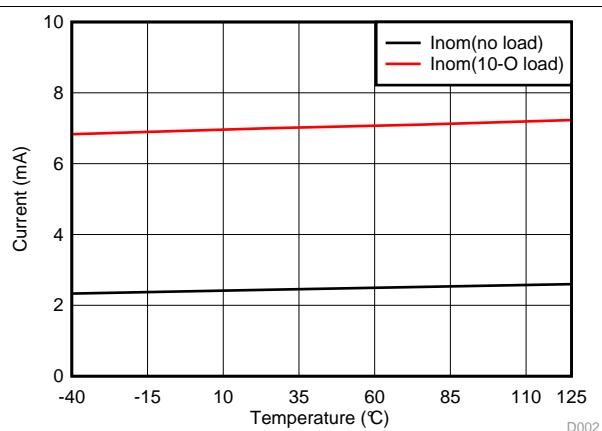


**Figure 8.  $V_{S,UVR}$  and  $V_{S,UVF}$**




**Figure 9.  $I_{nom}$  With No Load and 10-Ω Load**

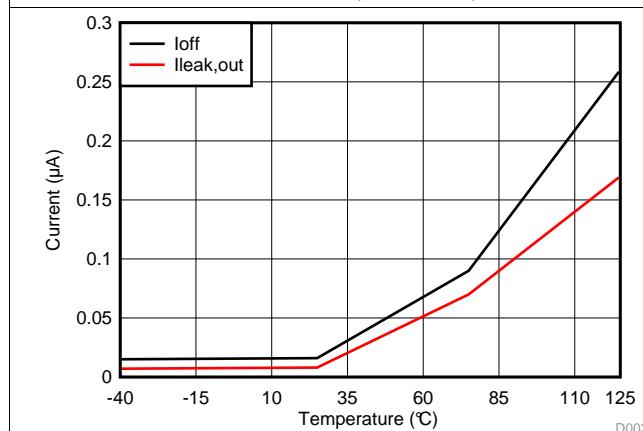


**Figure 10.  $I_{off}$  and  $I_{leak,out}$**

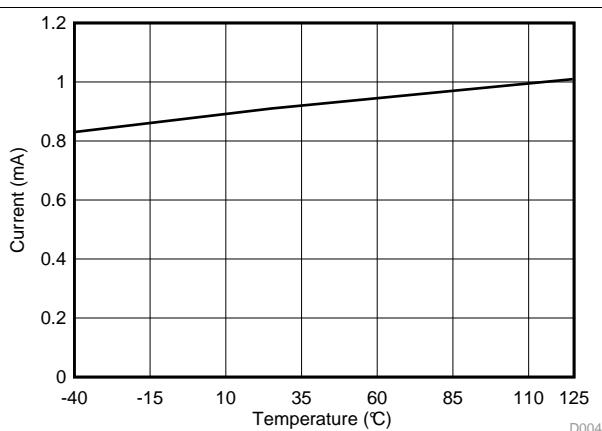

**Figure 11.  $I_{off,diag}$**

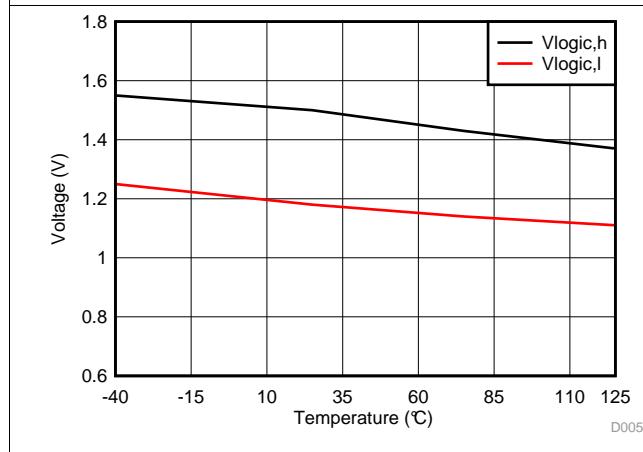







**Figure 12.  $V_{logic,h}$  and  $V_{logic,l}$**

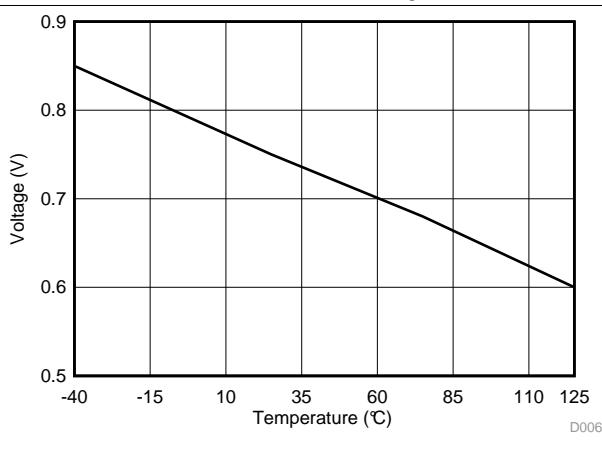

**Figure 13.  $VF$**


## Typical Characteristics (continued)

All the below data are based on the mean value of the three lots samples,  $V_S = 13.5$  V if not specified.

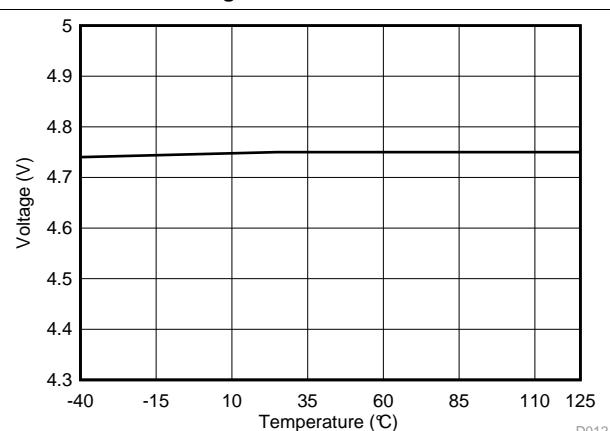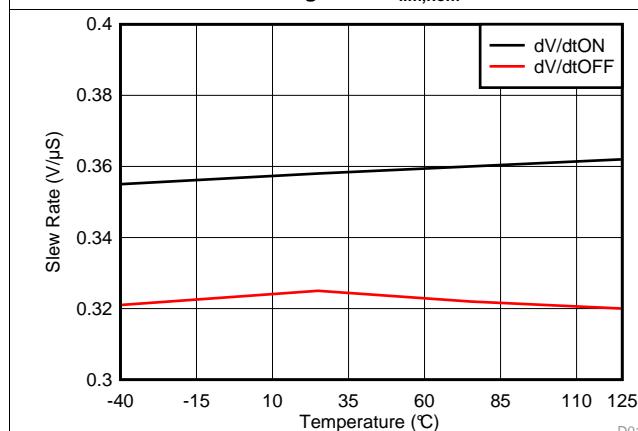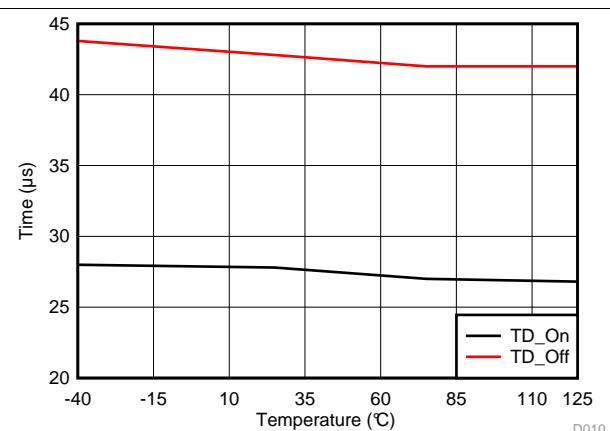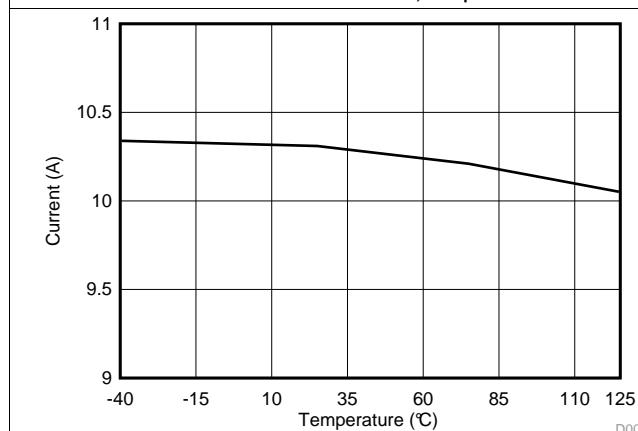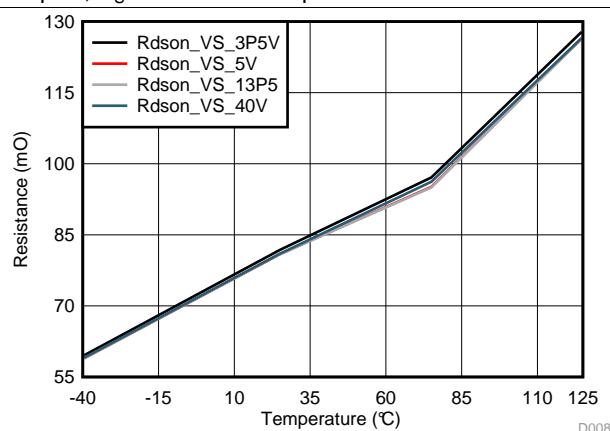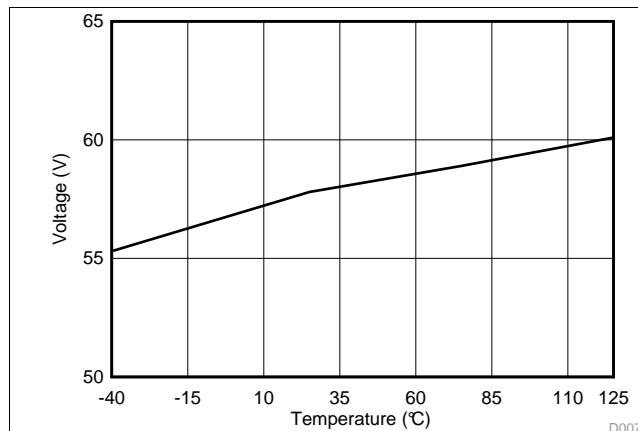


## Typical Characteristics (continued)

All the below data are based on the mean value of the three lots samples,  $V_S = 13.5$  V if not specified.

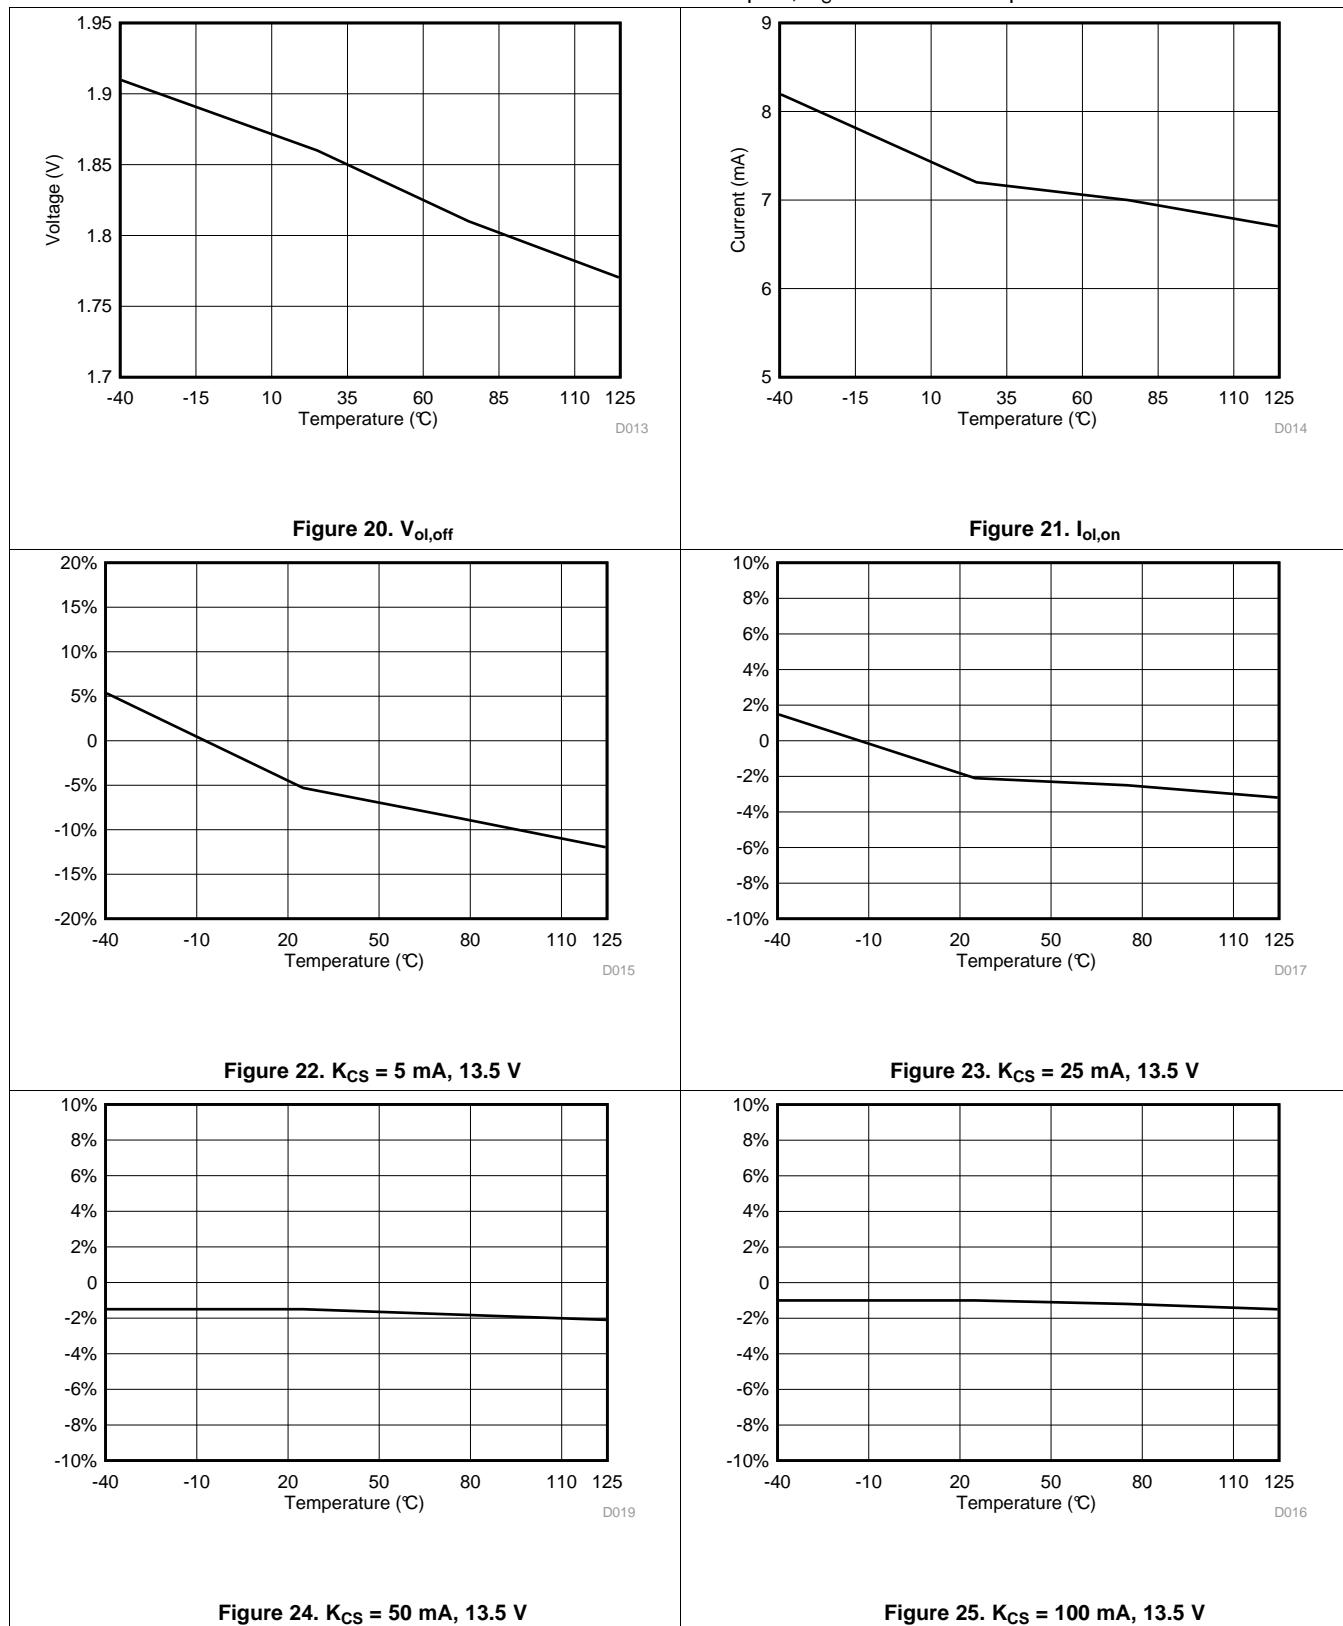

## Typical Characteristics (continued)

All the below data are based on the mean value of the three lots samples,  $V_S = 13.5$  V if not specified.

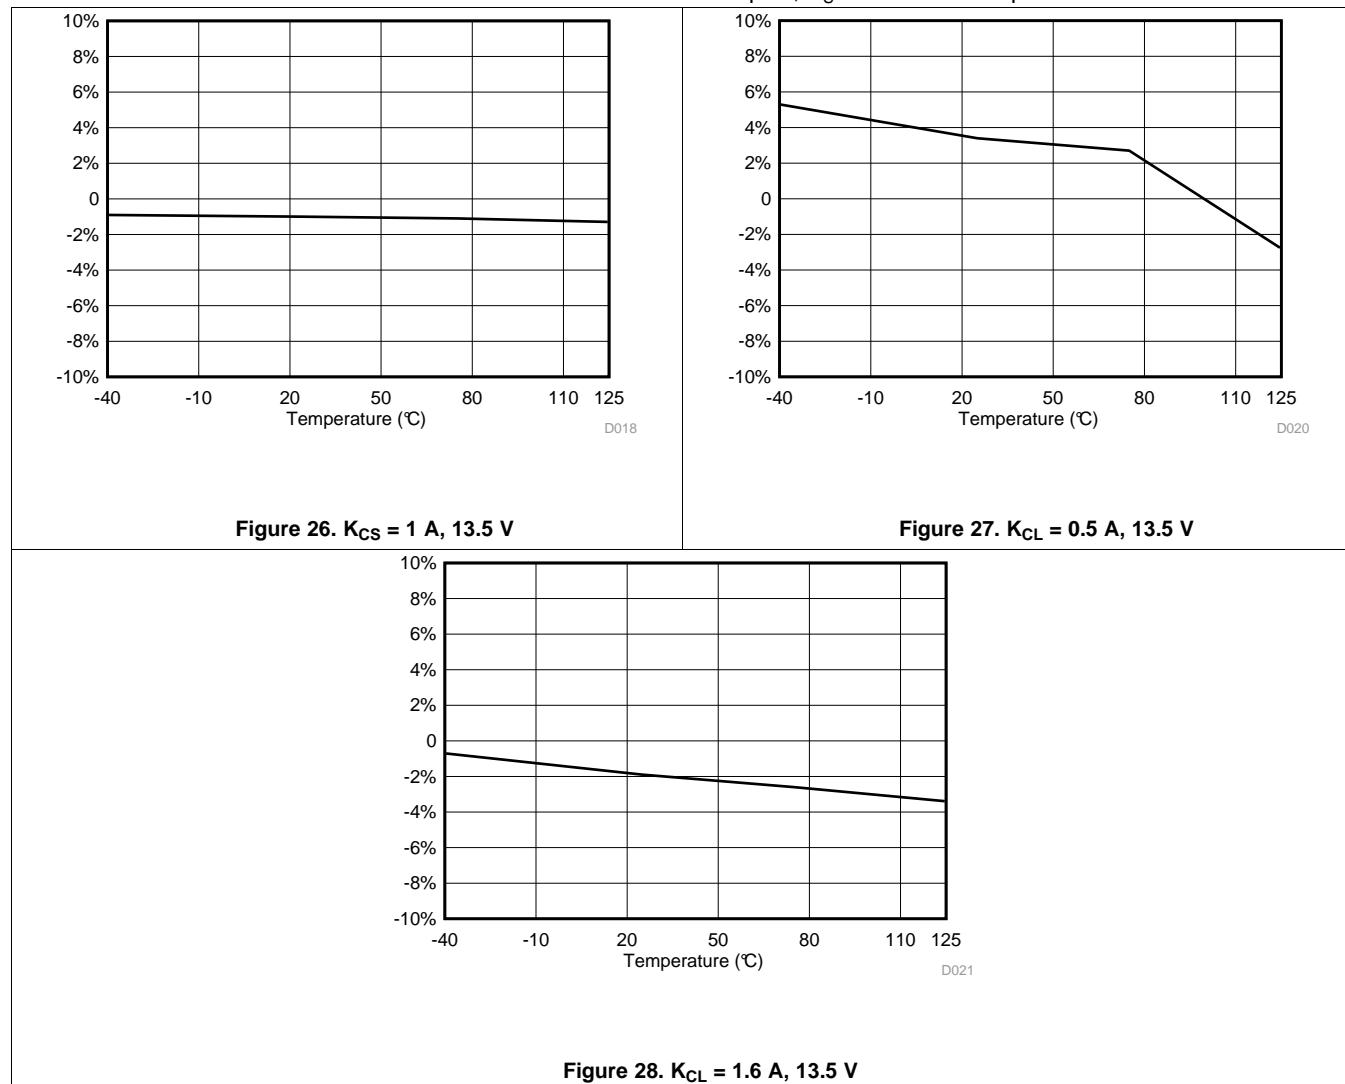

## 8 Detailed Description

### 8.1 Overview

The TPS1H100-Q1 is a high-side power switch that is fully protected and single channel, with integrated NMOS power FET and charge pump. Full diagnostics and high-accuracy current sense features enable intelligent control of the load. Programmable current limit function greatly improves the whole system's reliability. The device diagnostic reporting has two versions to support both digital status and analog current sense output, both of which can be set as high impedance when diagnostics are disabled, for multiplexing the MCU analog or digital interface among devices.

For version A, the digital status report is implemented with an open-drain structure. When a fault condition happens, it pulls down to GND. 3.3- or 5-V external pullup is required to match the microcontroller's supply level. For version B, high-accuracy current sensing allows better real-time monitoring effect and more accurate diagnostics without further calibration. A current mirror is used to source  $1 / K$  of the load current, which is reflected as voltage on the CS pin. K is a constant value across the temperature and supply voltage. Wide linear region from 0 to 4 V is presented for normal operation current sensing function. The CS pin can also report a fault with pulled up voltage of  $V_{CS,h}$ .


The external high-accuracy current limit allows setting the current limit value by application. It highly improves the system's reliability by clamping the inrush current effectively under start-up or short-circuit conditions. Also, it can save system costs by reducing PCB trace, connector size, and the preceding power stage capacity. Internal current limit is also implemented in this device. The smaller value of the external or internal current limit value is applied.

An active drain and source voltage clamp is built in to address switching off energy of inductive load, including the relays, solenoids, pumps, motors, and so forth. During the inductive switching off cycle, both the energy of the power supply ( $E_{BAT}$ ) and the load ( $E_{LOAD}$ ) are dissipated on the high-side power switch itself. With the benefits of process technology and excellent IC layout, TPS1H100-Q1 can achieve excellent power dissipation capacity, which can help save the external free-wheeling circuitry in most cases. Refer to [Inductive Load Switching-Off Clamp](#) for more details.

Short circuit reliability is critical for smart high-side power switch devices. The standard of AEC-Q100-012 is to determine the reliability of the devices when operating in a continuous short-circuit condition. Different grade levels are specified according to the pass cycles. This device is qualified with the highest level, Grade A, 1 million times short to GND certification.

TPS1H100-Q1 can be used as a high-side power switch a wide variety of resistive, inductive, and capacitive loads, including the low-wattage bulbs, LEDs, relays, solenoids, and heaters.

## 8.2 Functional Block Diagram

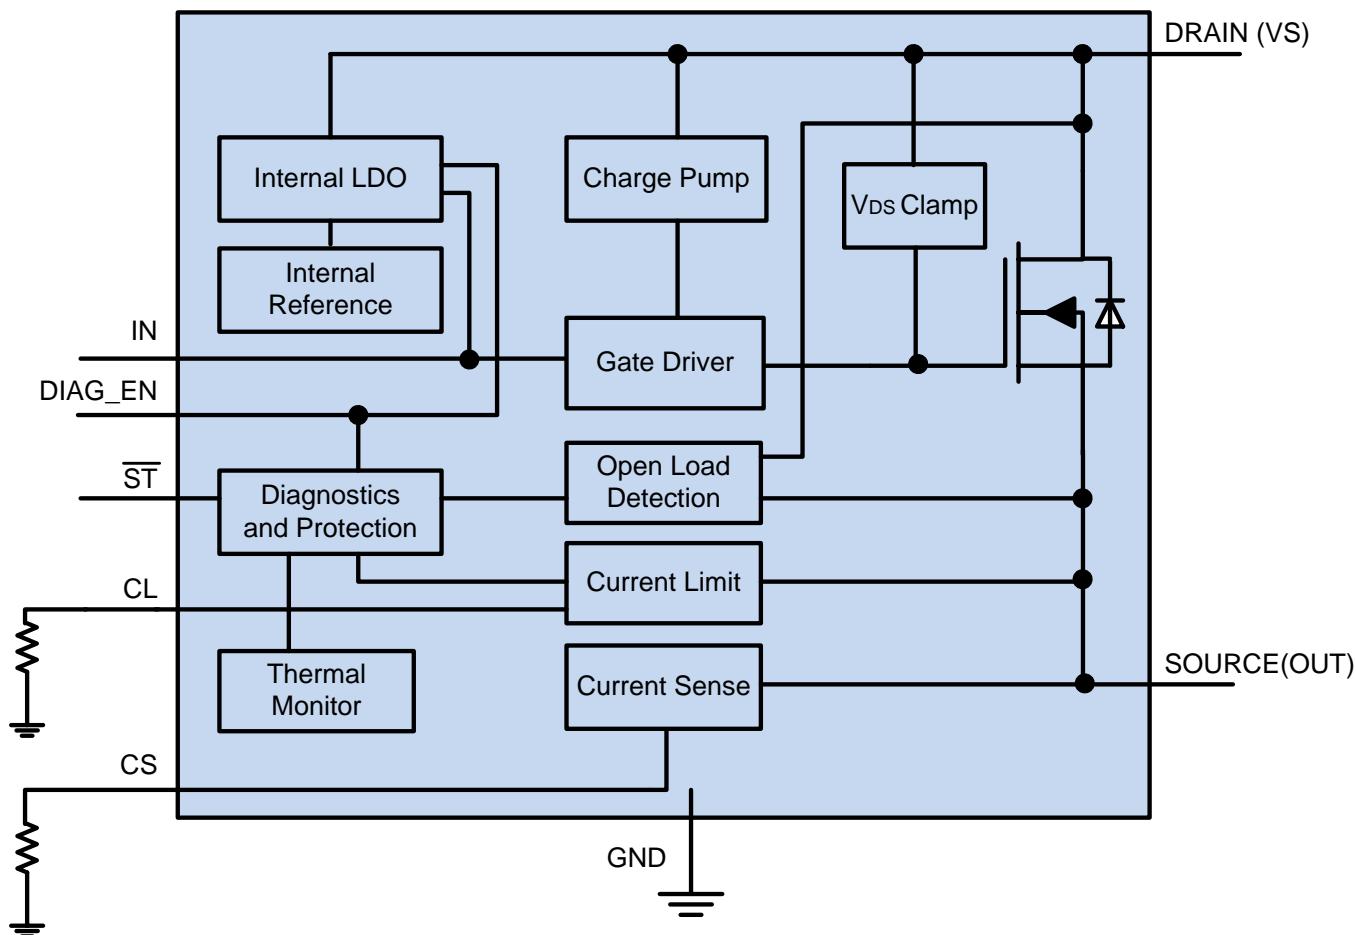

## 8.3 Feature Description

### 8.3.1 Accurate Current Sense

For version B, the high-accuracy current sense function is internally implemented, which allows a better realtime monitoring effect and more accurate diagnostics without further calibration. A current mirror is used to source  $1 / K$  of the load current, flowing out to the external resistor between the CS pin and GND, and reflected as voltage on CS pin.

$K$  is the ratio of the output current and the sense current. It is a constant value across the temperature and supply voltage. Each device was internally calibrated while in production, so post-calibration by users is not required in most cases.

## Feature Description (continued)

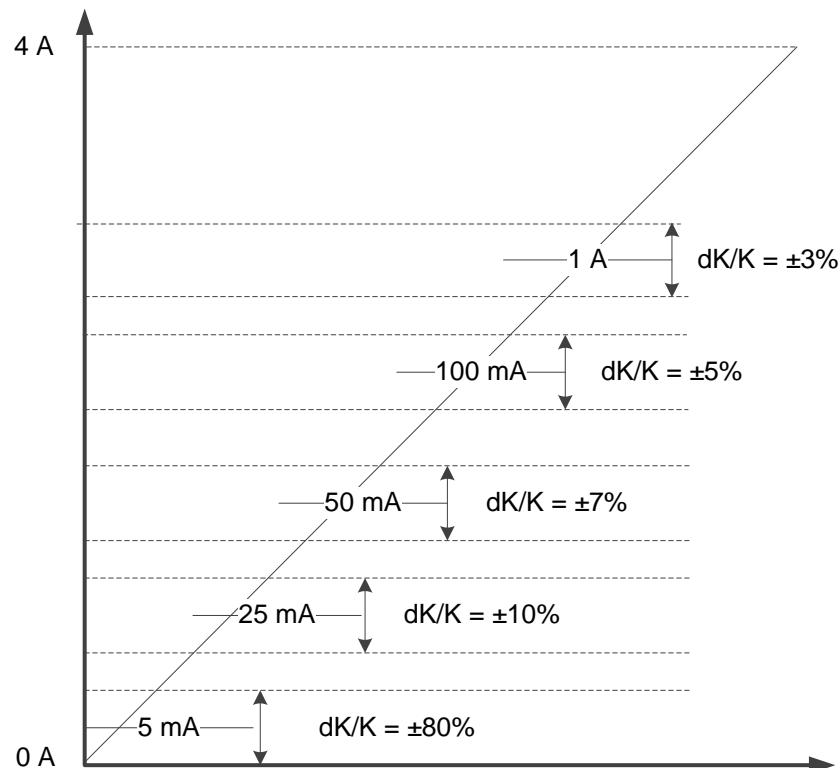


Figure 29. Current Sense Accuracy

Ensure the CS voltage is in the linear region (0 to 4 V) during normal operation. Calculate the  $R_{CS}$  with [Equation 1](#).

$$R_{CS} = \frac{V_{CS}}{I_{CS}} = \frac{V_{CS} \times K}{I_{out}} \quad (1)$$

Also, when a fault condition happens, CS works as a diagnostics report pin. When open load/short to battery happens in the on-state,  $V_{CS}$  almost equals 0. When current limit, thermal shutdown/swing, open load/short to battery in the off-state happens, the voltage is pulled up to  $V_{CS,h}$ . [Figure 30](#) shows a typical current sense voltage according to the operating conditions, including fault conditions.

## Feature Description (continued)

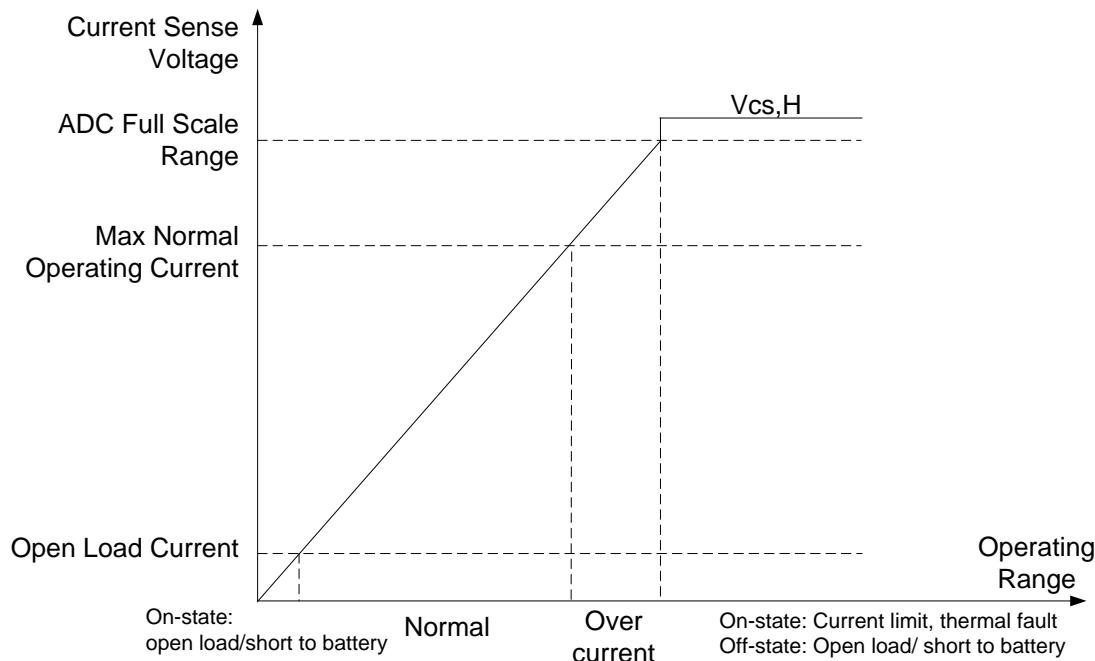


Figure 30. Current Sense Pin Voltage Indication

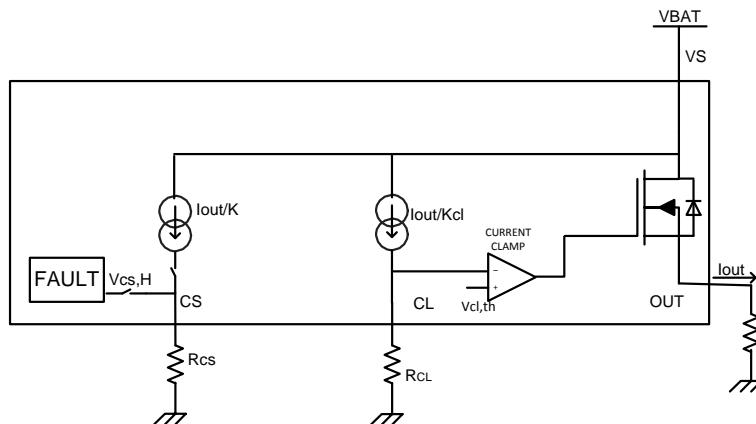


Figure 31. Current Sense and Current Limit Block Diagram

### 8.3.2 Programmable Current Limit

A high-accuracy current limit allows higher reliability, which protects the power supply during short circuit or power-up. Also, it can save system costs, by reducing PCB traces, connector size, and the preceding stage power capacity.

Current limit offers the protection to the load and integrated power FET from over stressing. It holds at the set value, and pulls up the CS pin to  $V_{CS,H}$  as a diagnostic report. The two current limit thresholds are:

- External programmable current limit -- An external resistor is used to convert a proportional load current into a voltage, which is compared with an internal reference voltage,  $V_{th,cl}$ . When the voltage on the CL pin exceeds  $V_{th,cl}$ , a closed loop steps in immediately.  $V_{GS}$  voltage regulates accordingly, leading to the  $V_{ds}$  voltage regulation. When the closed loop is set up, the current is clamped at the set value finally. The external programmable current limit enhances the flexibility to set the current limit value by application.
- Internal current limit -- Internal current limit is fixed and typically 10 A. To use internal current limit for large

## Feature Description (continued)

current applications, the CL pin should be tied directly to the device GND.

Both internal current limit ( $I_{lim,nom}$ ) and external programmable current limit are always active when  $V_S$  is powered and IN is high level. The smaller one (of  $I_{lim,nom}$  and external programmable current limit) is applied as the actual current limit.

Note that if a GND network is used (which leads to the level shift between the device GND and board GND), the CL pin must be connected with device GND. Calculate the  $R_{CL}$  with [Equation 2](#).

$$I_{CL} = \frac{V_{CL,th}}{R_{CL}} = \frac{I_{out}}{K_{CL}} \rightarrow R_{CL} = \frac{V_{CL,th} \times K_{CL}}{I_{out}} \quad (2)$$

For better protection from the hard short to GND condition (when  $V_S$  and input are high and a short to GND happens suddenly), an open loop fast-response behavior is set to turn off the channel, before the current limit closed loop is set-up. The open loop response time is around 1  $\mu$ s. With this fast response, the device can achieve better inrush suppression performance.

### 8.3.3 Inductive Load Switching-Off Clamp

When inductive load is switching off, output voltage is pulled down to negative, due to the inductance characteristics. The power FET may break down if the voltage is not clamped during the demagnetization. To protect the power FET in this situation, internally clamp the drain-to-source voltage, namely  $V_{DS,clamp}$ , the clamp diode between the drain and gate.

$$V_{DS,clamp} = V_{BAT} - V_{OUT} \quad (3)$$

During the duty of demagnetization ( $T_{DECAY}$ ), the power FET is turned on for inductance energy dissipation. Both the energy of the power supply ( $E_{BAT}$ ) and the load ( $E_{LOAD}$ ) are dissipated on the high-side power switch itself, which is called  $E_{HSD}$ . If resistance is in series with inductance, some of the load energy will be dissipated on the resistance.

$$E_{HSD} = E_{BAT} + E_{LOAD} = E_{BAT} + E_L - E_R \quad (4)$$

From the high-side power switch's view,  $E_{HSD}$  equals the integration value during the demagnetization duty.

$$E_{HSD} = \int_0^{T_{DECAY}} V_{DS,clamp} \times I_{OUT}(t) dt \quad (5)$$

$$T_{DECAY} = \frac{L}{R} \times \ln \left( \frac{R \times I_{OUT(MAX)} + |V_{OUT}|}{|V_{OUT}|} \right) \quad (6)$$

$$E_{HSD} = L \times \frac{V_{BAT} + |V_{OUT}|}{R^2} \times \left[ R \times I_{OUT(MAX)} - |V_{OUT}| \ln \left( \frac{R \times I_{OUT(MAX)} + |V_{OUT}|}{|V_{OUT}|} \right) \right] \quad (7)$$

When  $R$  approximately equals 0,  $E_{HSD}$  can be given simply as:

$$E_{HSD} = \frac{1}{2} \times L \times I_{OUT(MAX)}^2 \times \frac{V_{BAT} + |V_{OUT}|}{R^2} \quad (8)$$

## Feature Description (continued)

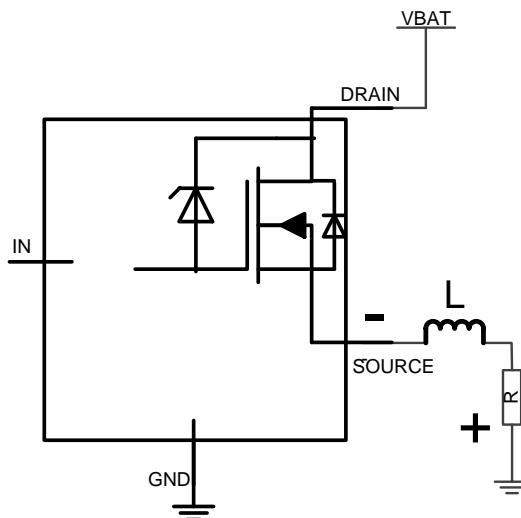


Figure 32. Driving Inductive Load


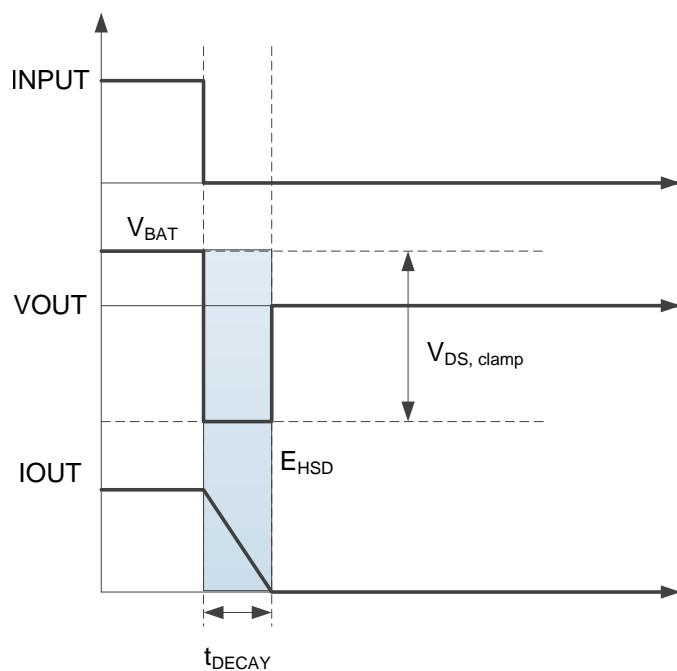


Figure 33. Inductive Load Switching Off Diagram

As discussed previously, when switching off, battery energy and load energy are dissipated on the high-side power switch, which leads to the large thermal variation. For each high-side power switch, the upper limit of the maximum safe power dissipation depends on the device intrinsic capacity, ambient temperature, and board dissipation condition. TI provides the upper limit of the maximum single pulse energy that devices can tolerate under the test condition:  $V_S = 13.5$  V, inductance from 0.1 to 400 mH,  $R = 0$   $\Omega$ , FR4 2s2p board, 2-  $\times$  70- $\mu$ m copper, 2-  $\times$  35- $\mu$ m copper, thermal pad copper area 600  $\text{mm}^2$ .

For one dedicated inductance, users can refer to Figure 34. If the maximum switching off current is smaller than the current value shown on the curve, the internal clamp function can be used for the demagnetization energy dissipation. If not, the external free-wheeling circuitry is necessary for device protection.

## Feature Description (continued)

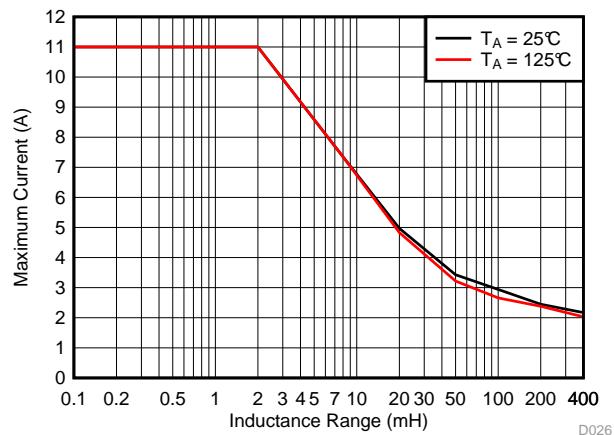

**Figure 34. Maximum Current vs Inductance Range**

### 8.3.4 Full Protections and Diagnostics

Table 1 is when DIAG\_EN enabled. When DIAG\_EN is low, current sense or ST is disabled accordingly. The output is in high-impedance mode. Refer to Table 2 for details.

**Table 1. Fault Table**

CONDITIONS	IN	OUT	CRITERION	ST (Version A)	CS (Version B)	Diagnostics Recovery
Normal	L	L		H	0	
	H	H		H	In linear region	
Short to GND	H	L	Current limit triggered.	L	$V_{CS,h}$	AUTO
Open load <sup>(1)</sup> Short to battery Reverse polarity	H	H	Version A: Output current < $I_{ol,on}$ Version B: Judged by users	L (deglitch)	Almost 0	AUTO
	L	H	$V_S - V_{OUT} < V_{ol,off}$	L (deglitch)	$V_{CS,h}$ (deglitch)	AUTO
Thermal shutdown	H		TSD triggered	L	$V_{CS,h}$	Recovery when temp < $T_{SD,rst}$
Thermal swing	H		$T_{sw}$ triggered	L	$V_{CS,h}$	AUTO

(1) Need external pullup resistor during off-state

**Table 2. DIAG\_EN Logic Table**


DIAG_EN	IN Condition	Protections and Diagnostics
HIGH	ON	See Table 1
	OFF	See Table 1
LOW	ON	Diagnostics disabled, protection normal CS or ST is high Impedance
	OFF	Diagnostics disabled, no protections CS or ST is high impedance

### 8.3.4.1 Short to GND/Overload Detection

In the on state, the short to GND fault is reported as the low status output or  $V_{CS,h}$  on CS, when current limit is triggered. The smaller one of the internal or external set value is applied for the actual current limit. It is in auto-recovery when the fault condition is cleared. If not cleared, thermal shutdown triggers to protect the power FET.


### 8.3.4.2 Open Load Detection

In the on state, for version A, if the current flowing through the output is less than  $I_{ol,on}$ , the device recognizes an open load fault. For version B, diagnostics are diagnosed by reading the voltage on the CS pin, it is judged by the user. As a benefit from high accuracy current sense down to very-small current range, this device can achieve very-low open load detection threshold, which respectively expands the normal operation region. TI suggests 10 mA as the upper limit for the open-load detection threshold and 25 mA as the lower limit for the normal operation current. In [Figure 35](#), the recommended open load detection region is shown as the dark-shaded region and the light-shaded region is for normal operation. As a guideline, do not overlap these two regions.

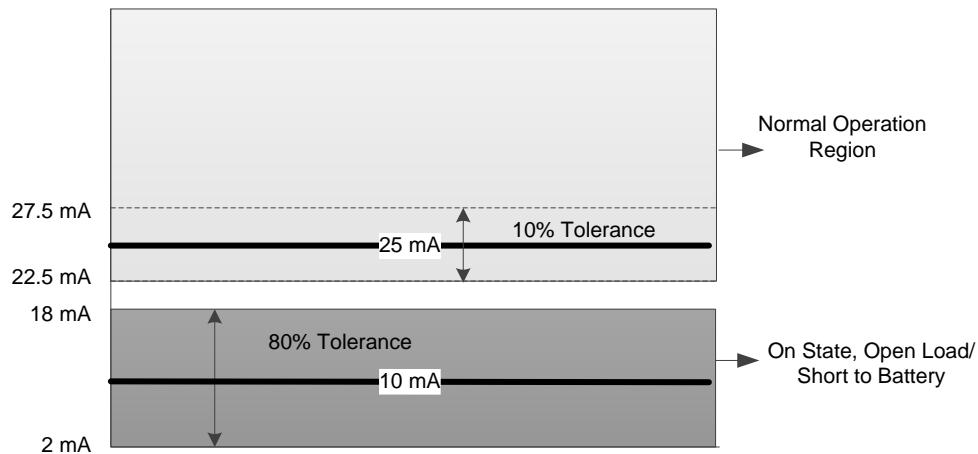

**Figure 35. On-State Open Load Detection and Normal Operation Diagram**

In the off state, if a load is connected, the output voltage is pulled to 0 V. When open load, the output voltage is close to the supply voltage,  $V_S - V_{OUT} < V_{ol,off}$ . For version A, the ST pin will go low to indicate the fault to MCU. For version B, the CS pin will be pulled up to  $V_{CS,h}$ . There is always a leakage current  $I_{ol,off}$  present on the output, due to internal logic control path or external humidity, corrosion, and so forth. Thus, TI recommends an external pullup resistor to offset the leakage current. This pullup current should be less than output load current to avoid misdetection in the normal operation mode. To reduce the standby current, TI recommends to always use a switch for the pullup resistor. TI recommends  $R_{pu} \leq 15 \text{ k}\Omega$ .

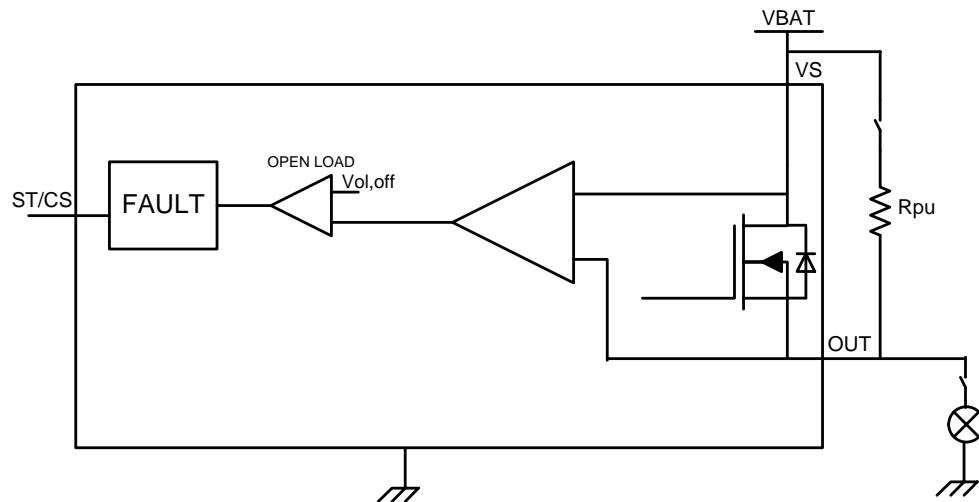

**Figure 36. Open Load Detection Circuit**

#### 8.3.4.3 Short to Battery Detection


Short to battery has the same detection mechanism and behavior as open load both in the on-state and off-state. Refer to the fault truth table, [Table 1](#), for more details. In the on-state, the reverse current flows through the FET instead of the body diode, leading to less power dissipation. Thus, the worst case for off-state is when reverse current occurs. In the off-state, if  $V_{OUT} - V_S < V_F$ , short to battery can be detected. ( $V_F$  is the body diode forward voltage and typically 0.7 V.) However, the reverse current will not occur. If  $V_{OUT} - V_S > V_F$ , short to battery can be detected, and the reverse current should be smaller than  $I_{rev2}$  to ensure the survival of the device. TI recommends switching on the input for lower power dissipation or the reverse block circuitry for the supply. Refer to [Reverse Current Protection](#) for more external protection circuitry information.

#### 8.3.4.4 Reverse Polarity Detection

Reverse polarity has the same detection mechanism and behavior as open load both in the on-state and off-state. Refer to the fault truth table, [Table 1](#), for more details. In the on-state, the reverse current flows through the FET instead of the body diode, leading to less power dissipation. Thus, the worst case off-state is when reverse current occurs. In off-state, the reverse current should be smaller than  $I_{rev1}$  to ensure the survival of the device. Refer to [Reverse Current Protection](#) for more external protection circuitry information.

#### 8.3.4.5 Thermal Protection Behavior

Both the absolute temperature thermal shutdown and the dynamic temperature thermal swing diagnostic and protection are built in to the device to increase the max reliability of the power FET. Thermal swing is active when the temperature of the power FET is increasing sharply, that is  $\Delta T = T_{DMOS} - T_{Logic} > T_{sw}$ , then the output is shut down, and the ST pin goes low, or the CS pin is pulled up to  $V_{CS,h}$ . It auto-recover and clears the fault signal until  $\Delta T = T_{DMOS} - T_{Logic} < T_{sw} - T_{hys}$ . Thermal swing function improves the device's reliability against repetitive fast thermal variation, as shown in [Figure 37](#). Multiple thermal swings are triggered before thermal shutdown happens. Thermal shutdown is active when absolute temperature  $T > T_{SD}$ . When active, the output is shut down, and the ST pin goes low, or the CS pin pulled up to  $V_{CS,h}$ . The output is auto-recovered when  $T < T_{SD} - T_{hys}$ ; the current limit is reduced to  $I_{lim,tsd}$ , or half of the programmable current limit value, to avoid repeated thermal shutdown. However, the thermal shutdown fault signal and half current limit value are not cleared until the junction temperature decreases to less than  $T_{SD,rst}$ .

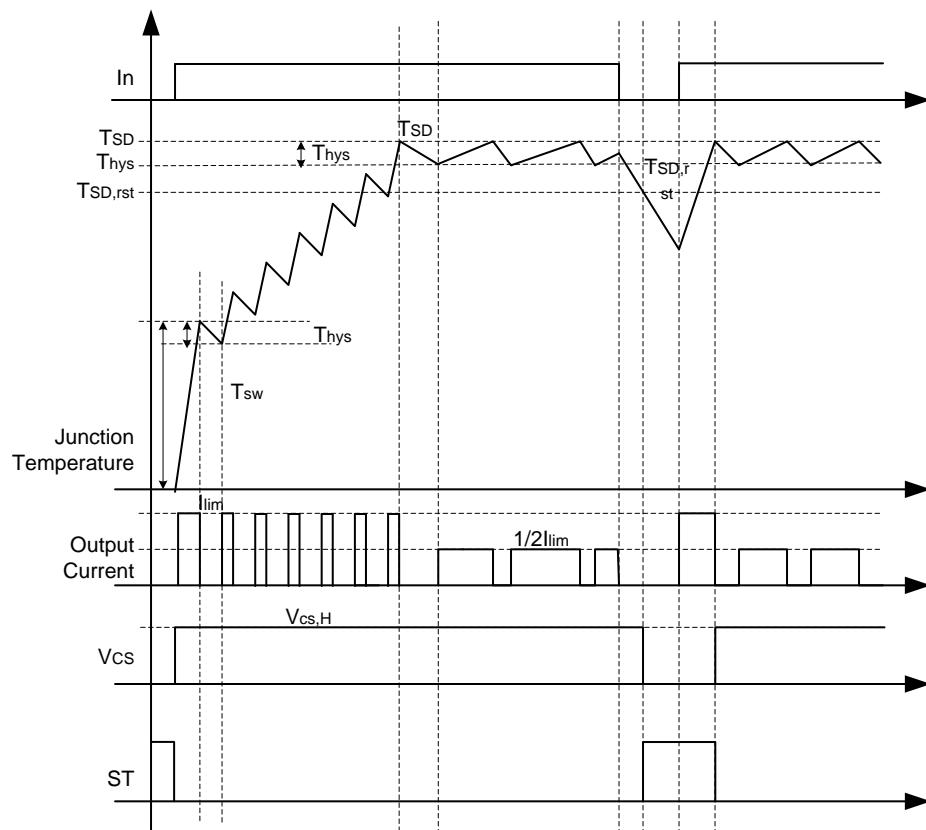

**Figure 37. Thermal Behavior**


#### 8.3.4.6 UVLO Protection

The device monitors the supply voltage  $V_S$  to prevent unpredicted behaviors in the event that the supply voltage is too low. When the supply voltage falls down to  $V_{S,UVF}$ , the output stage is shut down automatically. When the supply rises up to  $V_{S,UVR}$ , the device turns on.

### 8.3.4.7 Loss of GND Protection


When loss of GND happens, output is turned off regardless of whether the input signal is high or low.

**Case 1 (loss of device GND):** Loss of GND protection is active when the Tab,  $I_{C\_GND}$ , and current limit GND are one trace connected to the board GND, as shown in [Figure 38](#). Tab floating is also a choice.

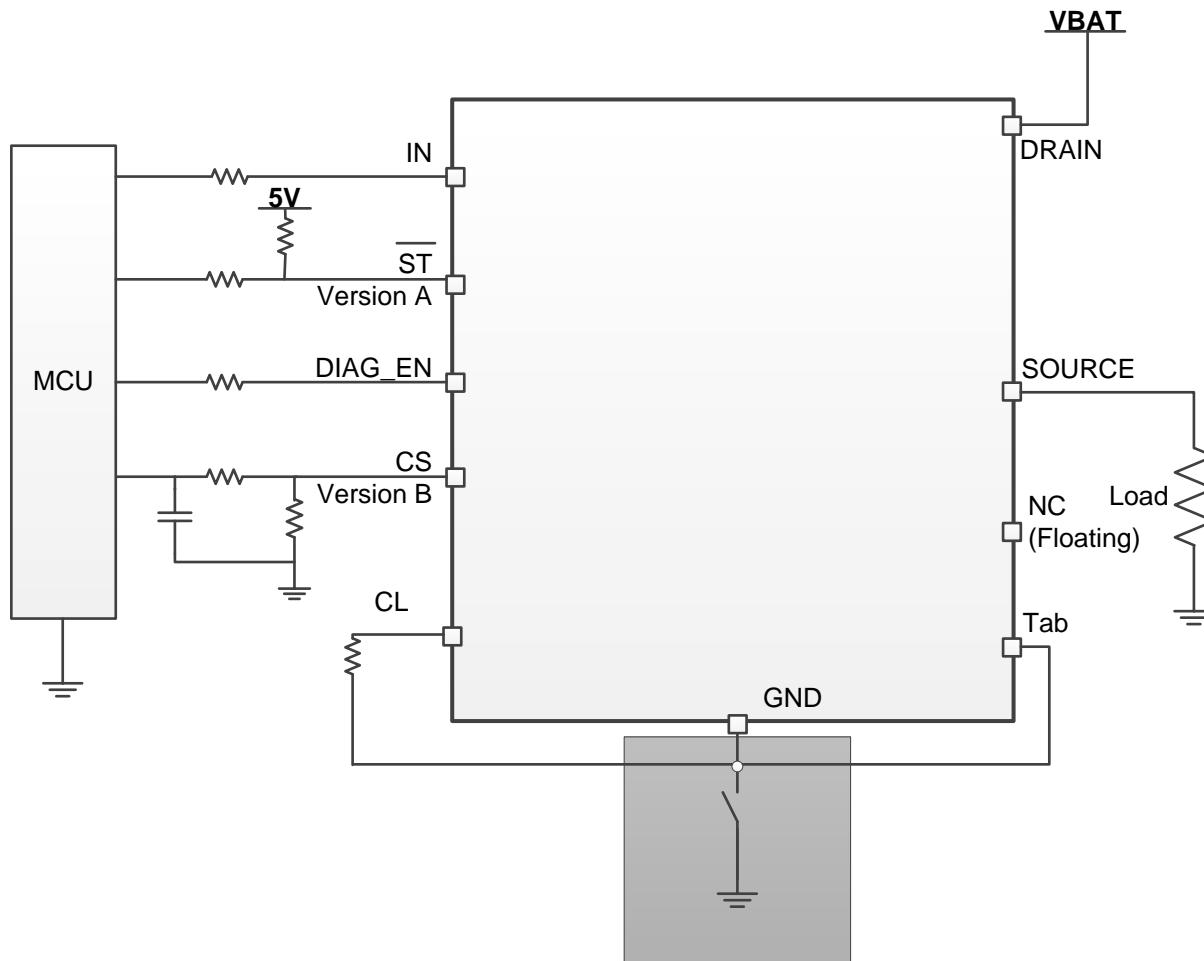

**Figure 38. Loss of Device GND**


**Case 2 (loss of module GND):** When the whole ECU module GND is lost, protections are also active. At this condition, the load GND remains connected.

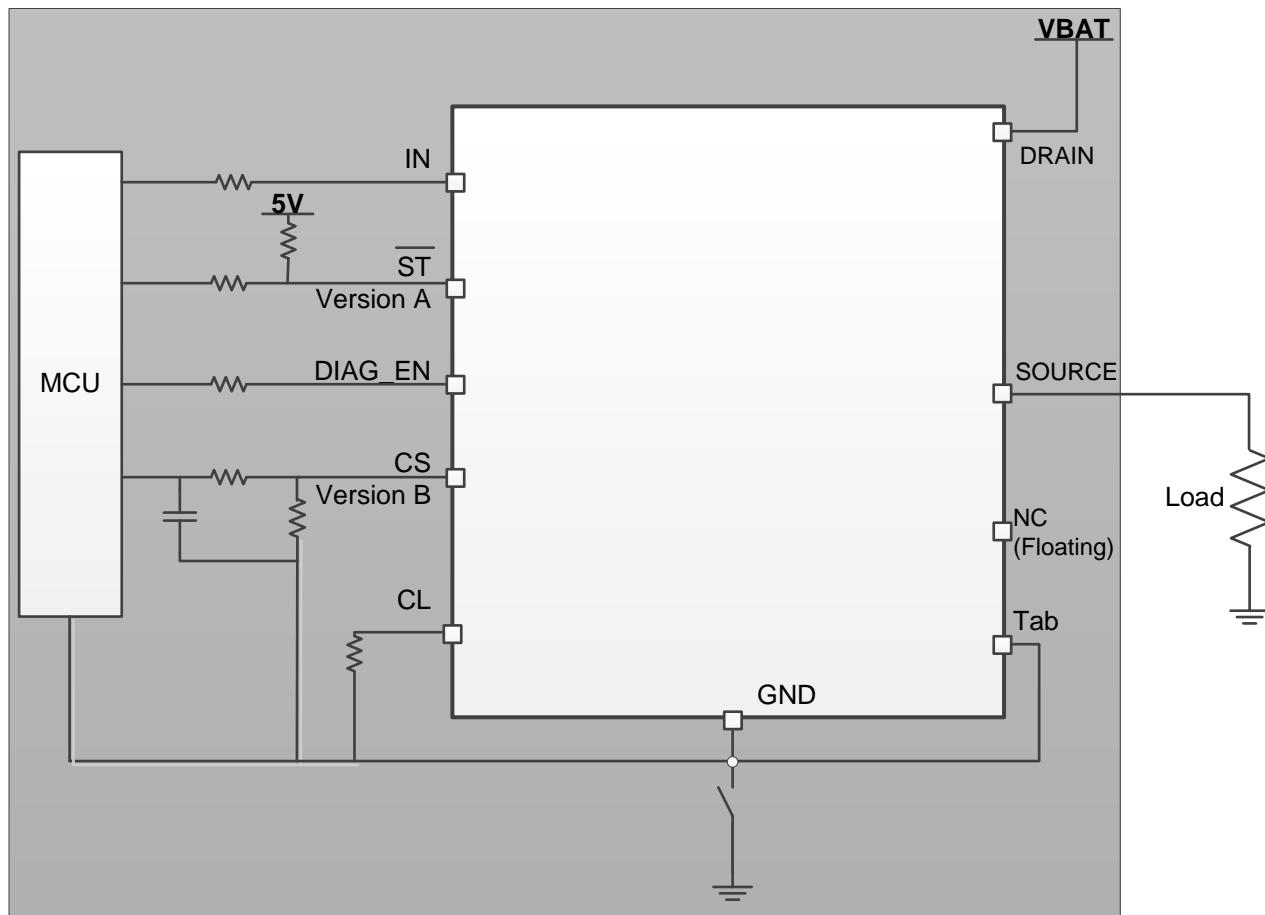

**Figure 39. Loss of Module GND**

### 8.3.4.8 Loss of Power Supply Protection

When loss of supply happens, output is turned off regardless of whether the input is high or low. For a resistive or capacitive load, loss of supply protection is easy to achieve due to no more power. The worst case is a charged inductive load. In this case, the current is driven from all of the IOs to maintain the inductance output loop. TI recommends either the MCU serial resistor plus the GND network (diode and resistor in parallel) or external free-wheeling circuitry.

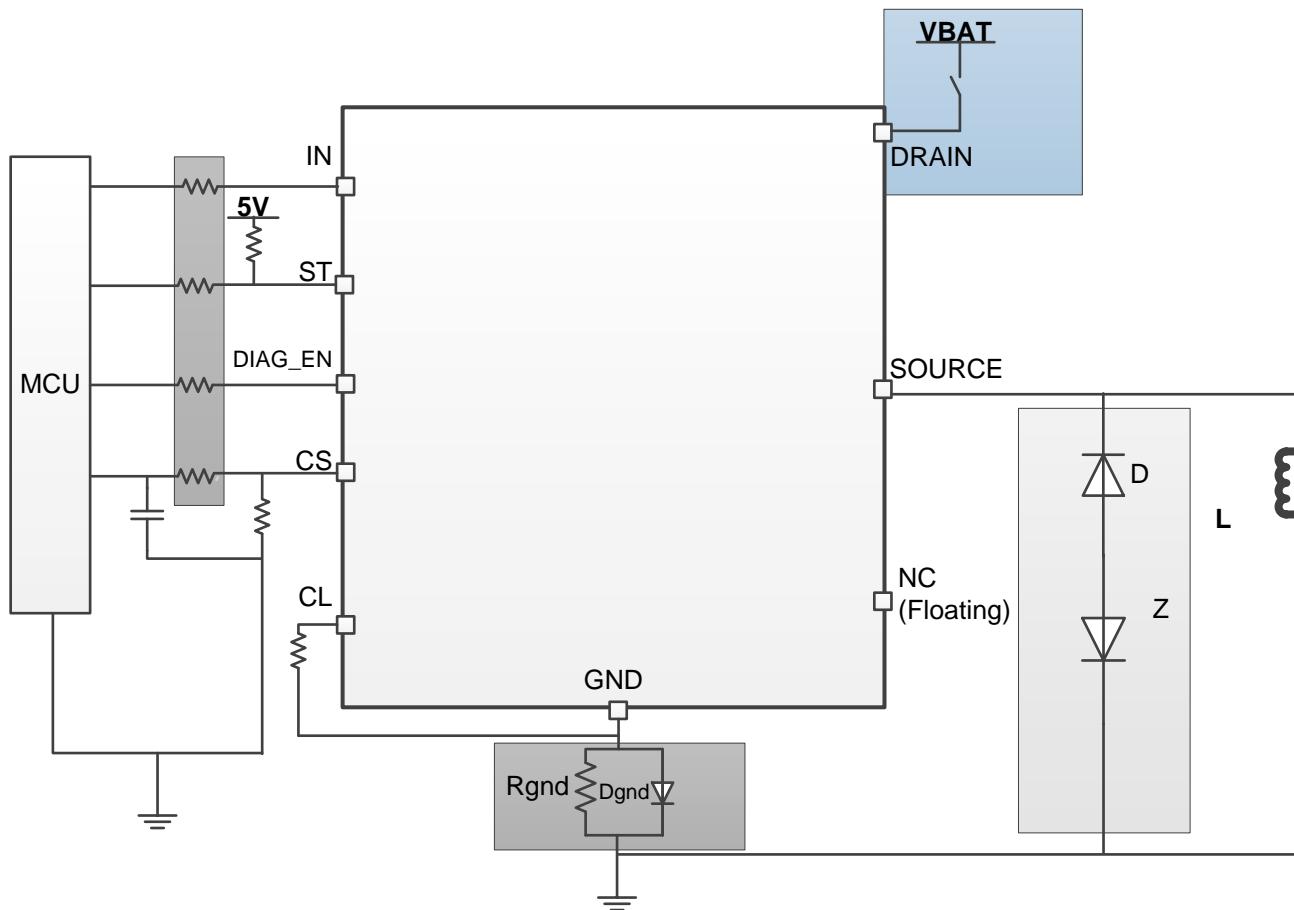

**Figure 40. Loss of Battery**

### 8.3.4.9 Reverse Current Protection

**Method 1:** Block diode connected with  $V_S$ . Both the IC and load are protected when in reverse polarity.


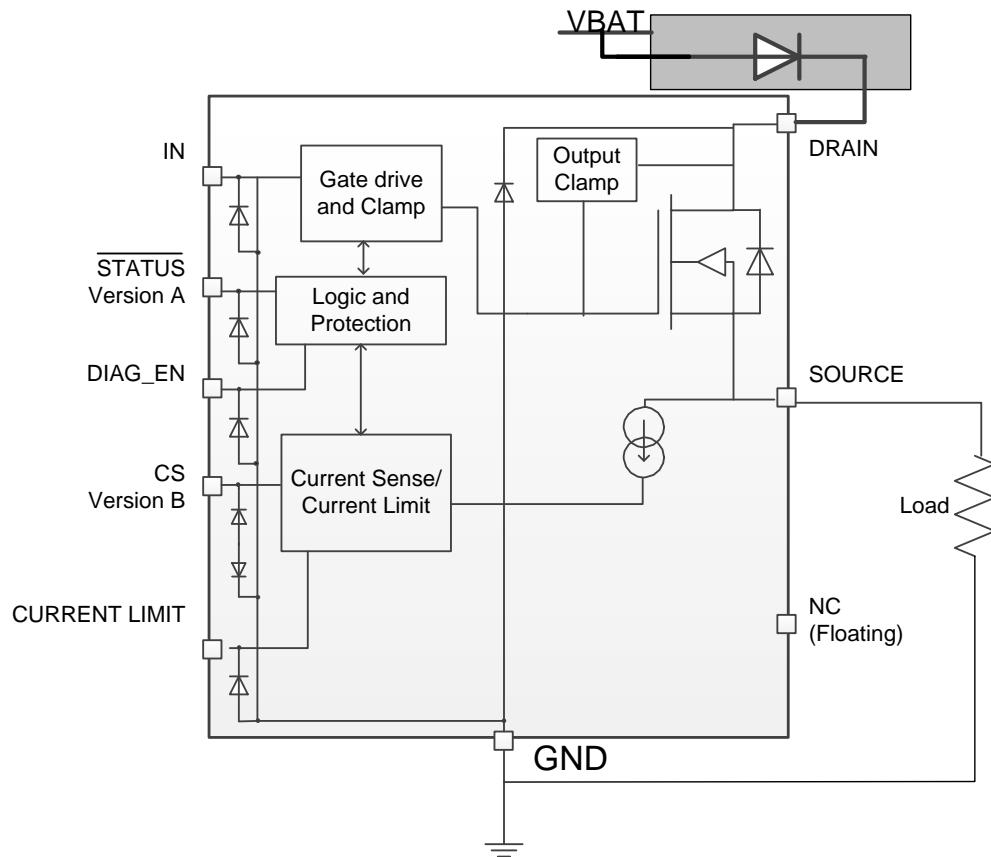


Figure 41. Reverse Protection With Block Diode

**Method 2 (GND network protection):** Only the high-side device is protected under this connection. The load reverse loop is limited by the load itself. Note when reverse polarity happens, the continuous reverse current through the power FET should be less than  $I_{rev}$ . Of the three types of ground pin networks, TI strongly recommends type 3 (the resistor and diode in parallel). No matter what types of connection are between IC GND and the board GND, if a GND voltage shift happens, ensure the following proper connections for the normal operation:

- Leave the NC pin floating or connect to the IC GND. TI recommends to leave floating.
- Connect the current limit programmable resistor to IC GND.

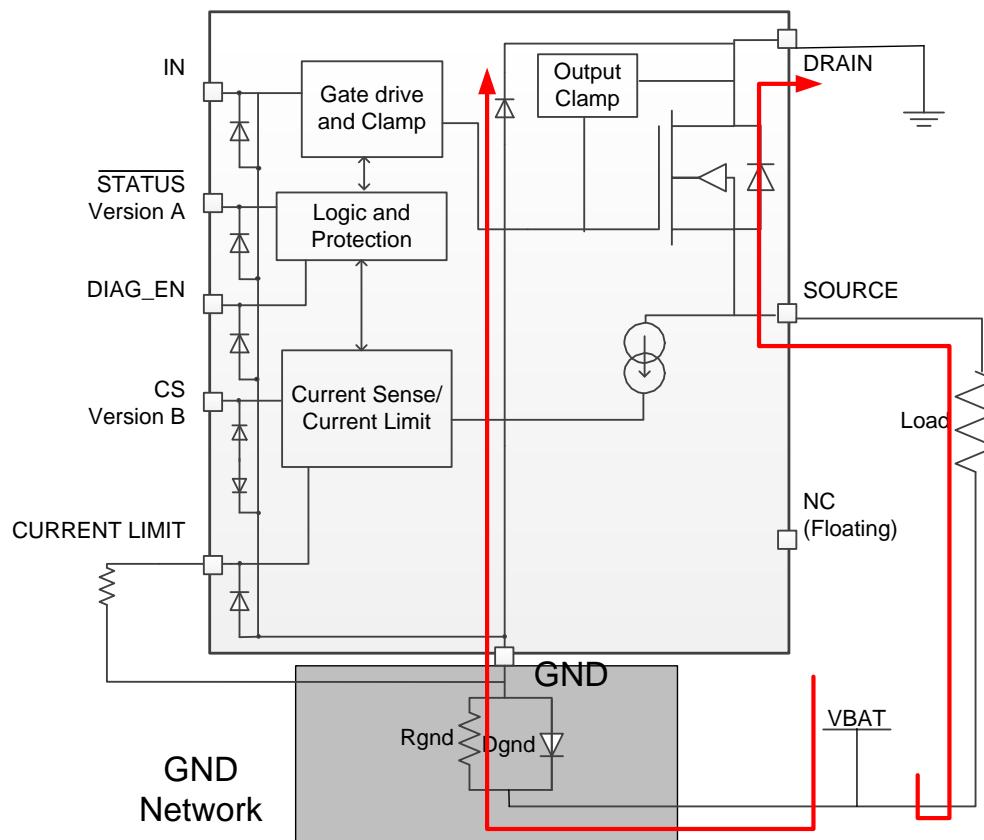

**Figure 42. Reverse Protection With GND Network**

- **Type 1 (resistor):** The higher resistor value contributes to a better current limit effect when the reverse battery or negative ISO pulses. However, it leads to higher GND shift during normal operation mode. Also, consider the resistor's power dissipation.

$$R_{GND} \leq \frac{V_{GNDshift}}{I_{nom}} \quad (9)$$

$$R_{GND} \geq \frac{(-V_{CC})}{(-I_{GND})}$$

where

- $V_{GNDshift}$  is the maximum value for the GND shift, determined by the HSD and microcontroller. TI suggests a value  $\leq 0.6$  V.
- $I_{nom}$  is the nominal operating current.
- $-V_{CC}$  is the maximum reverse voltage seen on the battery line.
- $-I_{GND}$  is the maximum reverse current the ground pin can withstand, which is available in the *Absolute Maximum Ratings*. (10)

If multiple high-side power switches are used, the resistor can be shared among devices.

- **Type 2 (diode):** A diode is needed to block the reverse voltage, which also brings a ground shift ( $\approx 600$  mV).

However, an inductive load is not acceptable to avoid an abnormal status when switching off.

- **Type 3 (resistor and diode in parallel (recommended)):** A peak negative spike may occur when the inductive load is switching off, which may damage the HSD or the diode. So, TI recommends a resistor in parallel with the diode when driving an inductive load. The recommended selection are 1-k $\Omega$  resistor in parallel with an  $I_F > 100$ -mA diode. If multiple high-side switches are used, the resistor and diode can be shared among devices.

#### 8.3.4.10 MCU IOs Protection

In many conditions, such as the negative ISO pulse, or the loss of battery when inductive load, a negative potential on the IC GND pin may damage the MCU's I/O pins. Therefore, the serial resistors between MCU and HSD are required.

Also, for the proper protection of loss of GND, TI recommends 4.7 k $\Omega$  when using 3.3-V MCU I/Os; 10 k $\Omega$  is for 5-V applications.

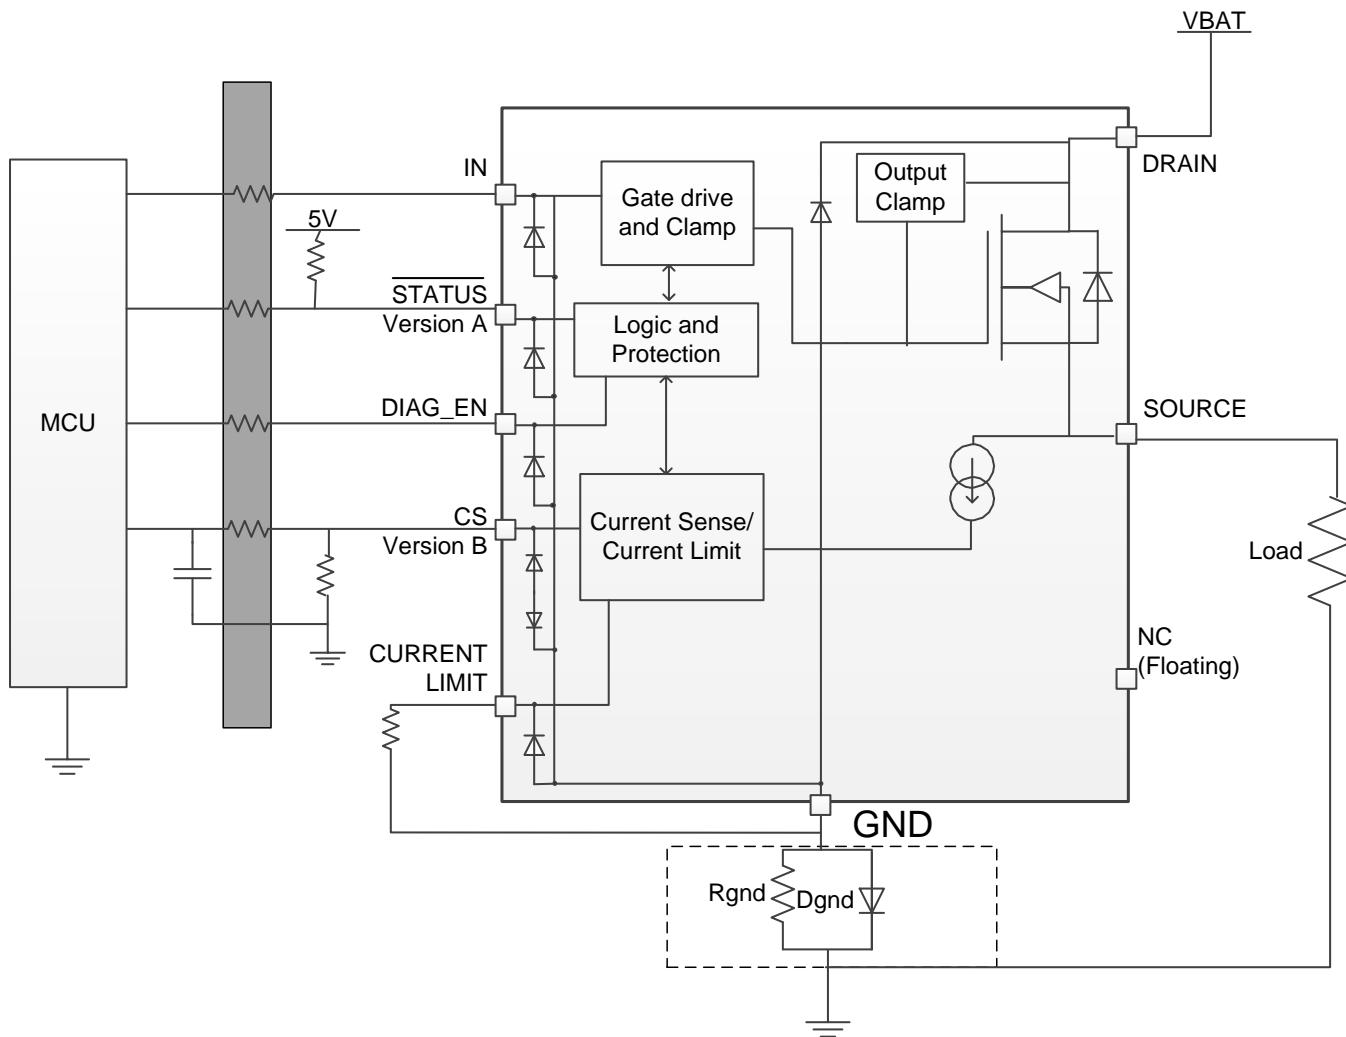


Figure 43. MCU IO Protections

#### 8.3.5 Diagnostic Enable Function


The diagnostic enable pin, DIAG\_EN, offers multiplexing of the microcontroller diagnostic input for current sense or digital status, by sharing the same sense resistor and ADC line or I/O port among multiple devices.

In addition, during the output off period, diagnostic disable function lowers the current consumption for the standby condition. The three working modes in the device are normal mode, standby mode, and standby mode with diagnostic. If an off-state power saving is required in the system, the standby current is <500 nA with  $\text{DIAG\_EN}$  low. If the off-state diagnostic is required in the system, the typical standby current is around 1 mA with  $\text{DIAG\_EN}$  high.

## 8.4 Device Functional Modes

### 8.4.1 Working Mode

The three working modes in the device are normal mode, standby mode, and standby mode with diagnostic. If an off-state power saving is required in the system, the standby current is less than 500 nA with  $\text{DIAG\_EN}$  low. If an off-state diagnostic is required in the system, the typical standby current is around 1 mA with  $\text{DIAG\_EN}$  high. Note that to enter standby mode requires  $\text{IN}$  low and  $t > t_{\text{off,deg}}$ .  $t_{\text{off,deg}}$  is the standby mode deglitch time, which is used to avoid false triggering. Figure 44 shows a work mode state machine block diagram.

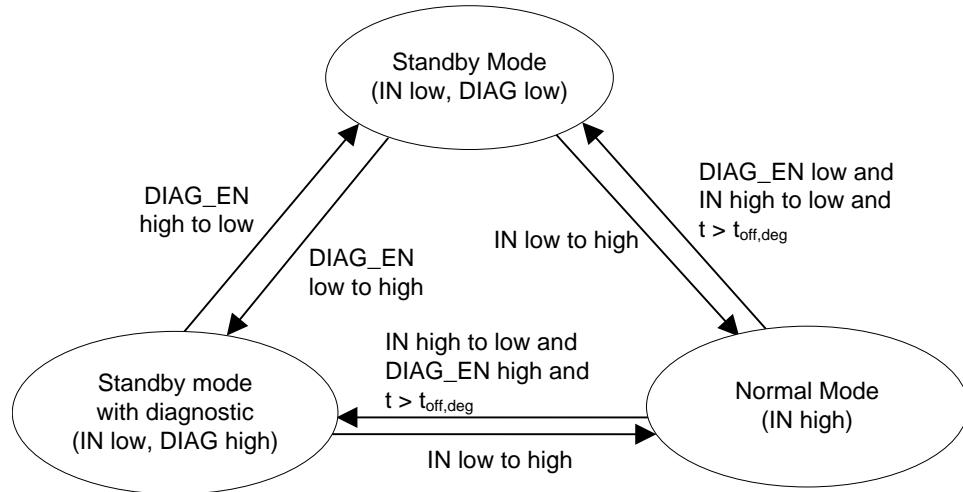

**Figure 44. Work Mode State Machine**

## 9 Application and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The following discussion notes how to implement the device such as distinguish the different fault modes and transient pulse immunity test.

In some applications, open load, short to battery, and short to GND are required to distinguish from each other. This requires two steps.

### 9.2 Typical Application

Figure 45 shows an example of how to design the external circuitry parameters.

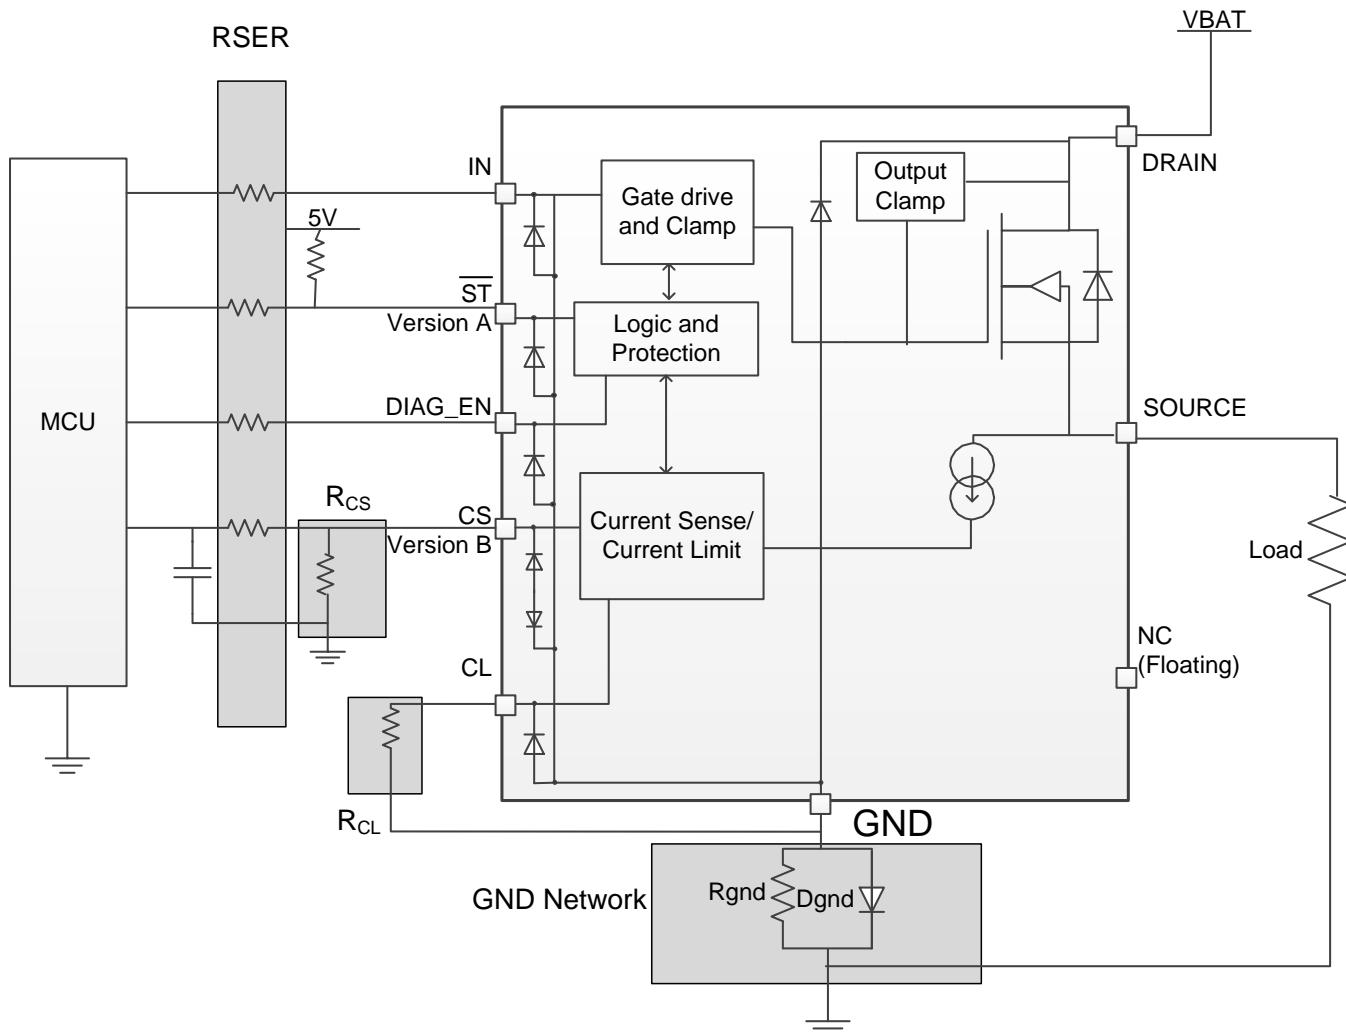


Figure 45. Typical Application Circuitry

## Typical Application (continued)

### 9.2.1 Design Requirements

- $V_S$  range from 9 to 16 V
- Nominal current of 2 A
- Current sense for fault monitoring
- Expected current limit value of 5 A
- Full diagnostic with 5-V MCU
- Reverse protection with GND network

### 9.2.2 Detailed Design Procedure

The  $R_{CS}$ ,  $V_{CS}$  linear region is from 0 to 4 V. To keep the 2-A nominal current in the 0- to 3-V range, calculate the  $R_{CS}$  as in [Equation 11](#). To achieve better current sense accuracy, 1% accuracy or an even higher resistor is preferred.

$$R_{CS} = \frac{V_{CS}}{I_{CS}} = \frac{V_{CS} \times K}{I_{OUT}} = \frac{3 \times 500}{2} = 750 \Omega \quad (11)$$

$R_{CL}$ ,  $V_{CL,th}$  is the current limit internal threshold 1.233 V. To set the programmable current limit value at 5 A, calculate the  $R_{CL}$  as in [Equation 12](#).

$$R_{CL} = \frac{V_{cl,th} \times K_{CL}}{I_{OUT}} = \frac{1.233 \times 2000}{5} = 493.2 \Omega \quad (12)$$

TI recommends  $R_{SER} = 10 \text{ k}\Omega$  for 5-V MCU.

TI recommends  $R_{GND} = 1 \text{ k}\Omega$ , 200 V / 0.2 A  $D_{GND}$  for the GND network.

#### 9.2.2.1 Distinguishing of Different Fault Modes

Some applications require that open load, short to battery, and short to GND can be distinguished from each other. This requires two steps:

1. In the on state, for current sense version device (version B), on-state open load/ short to battery are recognized as an extremely-low voltage level in current sense pin, while short to GND is reported as a pulled-up voltage  $V_{CS,h}$ . Therefore, the user can find a short to GND (see [Figure 46](#)).
2. If reported as an on-state open load or short to battery fault in the first step, turn off the input signal. In the off state, with an external pulldown resistor, open load and short to battery can be easily distinguished. When the output pulls down, the short to battery is still reported as an off-state fault condition, while the open load is ignored.

## Typical Application (continued)

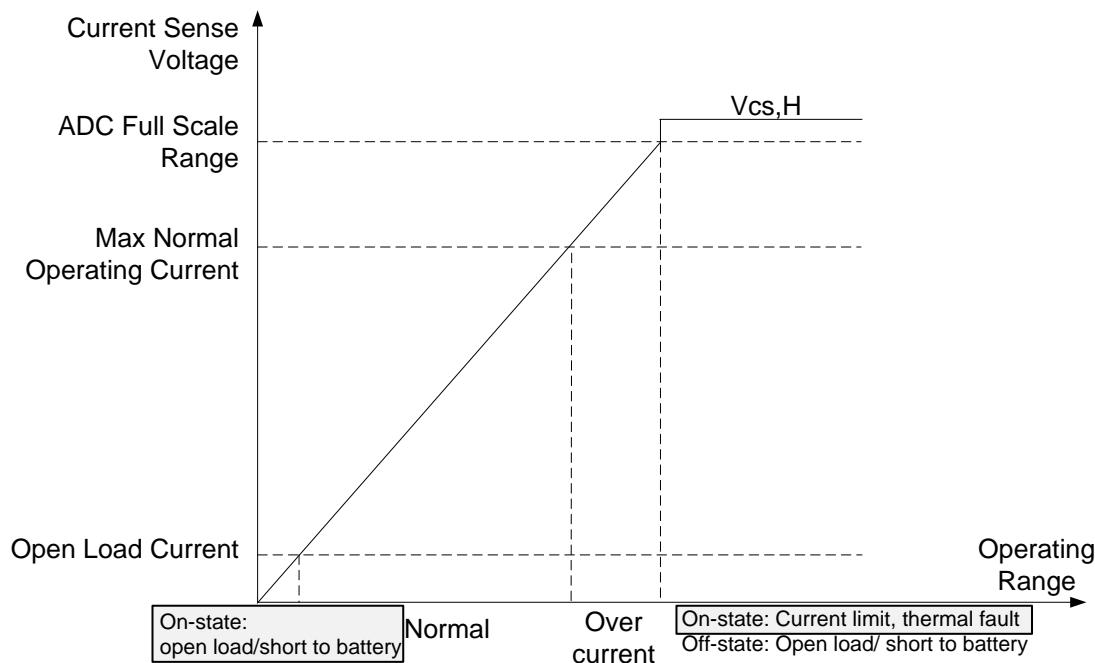


Figure 46. Step 1: Distinguish Short to GND in On-State

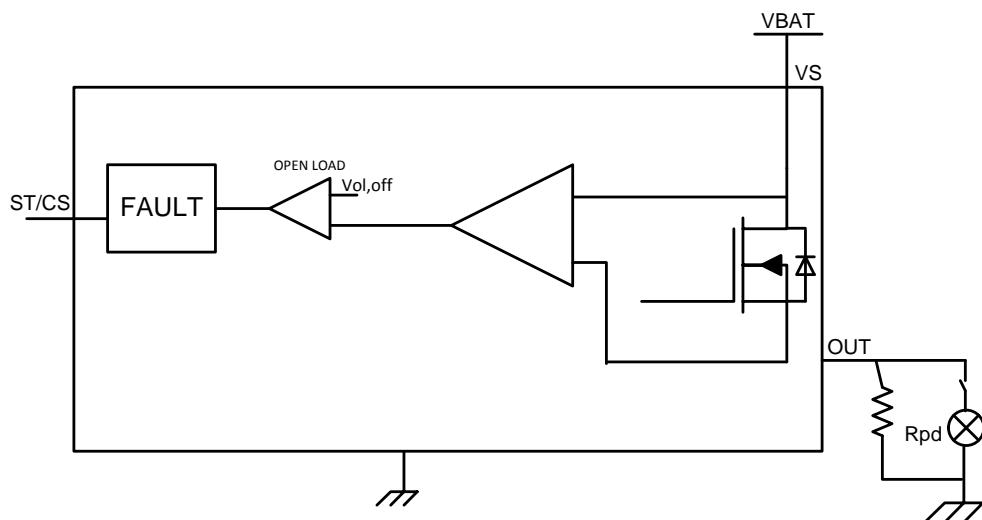


Figure 47. Step 2: Distinguish Short to Battery in Off-State

### 9.2.2.2 AEC Q100-012 Test Grade A Certification

Short-circuit reliability is critical for smart high-side power switch devices. The standard of AEC-Q100-012 is to determine the reliability of the devices when operating in a continuous short-circuit condition. Different grade levels are specified according to the pass cycles. This device is qualified with the highest level, Grade A, 1 million times short to GND certification.

Three test modes are defined in the AEC Q100-012. See [Table 3](#) for cold repetitive SCT – long pulse, cold repetitive SCT – short pulse, and hot repetitive SCT.

## Typical Application (continued)

**Table 3. Tests**

Test Items	Test Condition	Test Cycles
Cold repetitive short circuit test – short pulse	–40°C, 10-ms pulse, cool down	1M
Cold repetitive short circuit test – long pulse	–40°C, 300-ms pulse, cool down	1M
Hot repetitive short circuit test	25°C, keeping short	1M

Different grade levels are specified according to the pass cycles. The TPS1H100 gets the certification of Grade A level, 1 million times short to GND, which is the highest test standard in the market.

**Table 4. Grade Levels**

Grade	Number of Cycles	Lots/Samples Per Lot	Number of Fails
A	>1000000	3/10	0
B	>300000 to 1000000	3/10	0
C	>100000 to 300000	3/10	0
D	>30000 to 100000	3/10	0
E	>10000 to 30000	3/10	0
F	>3000 to 10000	3/10	0
G	>1000 to 3000	3/10	0
H	300 to 1000	3/10	0
O	<300	3/10	0

### 9.2.2.3 EMC Transient Disturbances Test

Due to the severe electrical condition in the automotive, the immunity capacity against electrical transient disturbances is required, especially for a high-side power switch, which is connected to the battery directly. Detailed test requirements are in accordance with the ISO 7637-2:2011 and ISO 16750-2:2010. TPS1H100-Q1 part is tested and certificated by a third-party organization.

**Table 5. ISO 7637-2:2011(E) in 12-V System<sup>(1)(2)(3)(4)</sup>**

Test Item	Test Pulse Severity Level and vs Accordingly		Pulse Duration (t <sub>d</sub> )	Minimum Number of Pulses or Test Time	Burst Cycle/Pulse Repetition Time		Input Resistance (Ω)	Function Performance Status Classification
	Level	V <sub>s</sub> /V			MIN	MAX		
1	III	–112	2 ms	500 pulses	0.5 s	e s	10	Status II
2a	III	55	50 μs	500 pulses	0.2 s	5 s	2	Status II
2b	IV	10	0.2 to 2 s	10 pulses	0.5 s	5 s	0 to 0.05	Status II
3a	IV	–220	0.1 μs	1h	90 ms	100 ms	50	Status II
3b	IV	150	0.1 μs	1h	90 ms	100 ms	50	Status II

- (1) Tested both under input low condition and high condition.
- (2) Considering the worst test condition, it is tested without any filter capacitors in V<sub>s</sub> and V<sub>OUT</sub>.
- (3) GND pin network is a 1-kΩ resistor in parallel with a diode BAS21-7-F.
- (4) Status II: The function does not perform as designed during the test, but returns automatically to normal operation after the test.

**Table 6. ISO 16750-2:2010(E) Load Dump Test B in 12-V System<sup>(1)(2)(3)(4)(5)</sup>**


Test Item	Test Pulse Severity Level and vs Accordingly		Pulse Duration (t <sub>d</sub> )	Minimum Number of Pulses or Test Time	Burst Cycle/Pulse Repetition Time		Input Resistance (Ω)	Function Performance Status Classification
	Level	V <sub>s</sub> /V			MIN	MAX		
Test B		45	40 to 400 ms	5 pulses	60	e	0.5 to 4	Status II

- (1) Tested both under input low condition and high condition.
- (2) Considering the worst test condition, it is tested without any filter capacitors in V<sub>s</sub> and V<sub>OUT</sub>.
- (3) GND pin network is a 1-kΩ resistor in parallel with a diode BAS21-7-F.
- (4) Status II: The function does not perform as designed during the test, but returns automatically to normal operation after the test.
- (5) Select 45-V external suppressor

### 9.2.3 Application Curves

Figure 48 shows a test example of initial short circuit inrush current limit. Test condition:  $V_S = 13.5$  V, input is from low to high, load is short to GND or with  $470\text{-}\mu\text{F}$  capacitive load, external current limit is 2 A. CH1 is the output current. CH3 is the input step.

Figure 49 shows a test example of a hard short-circuit inrush current limit. Test condition:  $V_S = 13.5$  V, input is high, load is  $5\text{ }\mu\text{H} + 100\text{ m}\Omega$ , external current limit is 1 A. A short to GND suddenly happens.

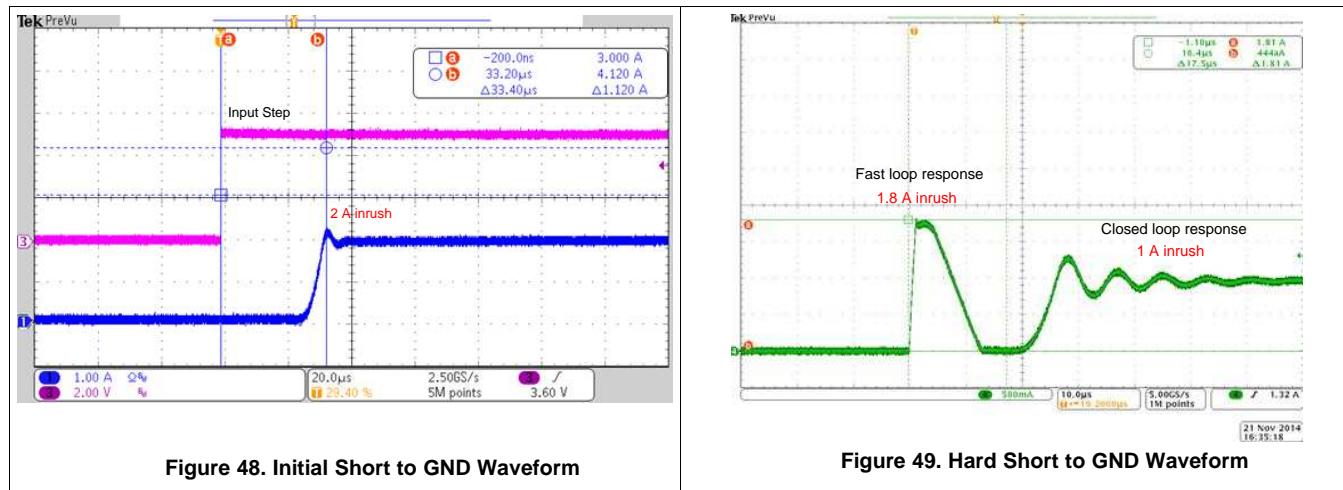

## 10 Power Supply Recommendations

The device is qualified for both automotive and industrial applications. The normal power supply connection is a 12-V automotive system or 24-V industrial system. Detailed supply voltage should be within the range specified in the [Recommended Operating Conditions](#).

## 11 Layout

## 11.1 Layout Guidelines


To prevent thermal shutdown,  $T_J$  must be less than 150°C. If the output current is very high, the power dissipation may be large. The HTSSOP package has good thermal impedance. However, the PCB layout is very important. Good PCB design can optimize heat transfer, which is absolutely essential for the long-term reliability of the device.

- Maximize the copper coverage on the PCB to increase the thermal conductivity of the board. The major heat-flow path from the package to the ambient is through the copper on the PCB. Maximum copper is extremely important when there are not any heat sinks attached to the PCB on the other side of the package.
- Add as many thermal vias as possible directly under the package ground pad to optimize the thermal conductivity of the board.
- All thermal vias should either be plated shut or plugged and capped on both sides of the board to prevent solder voids. To ensure reliability and performance, the solder coverage should be at least 85%.

## 11.2 Layout Example

### 11.2.1 Without a GND Network

Without a GND network, tie the thermal pad directly to the board GND copper for better thermal performance.

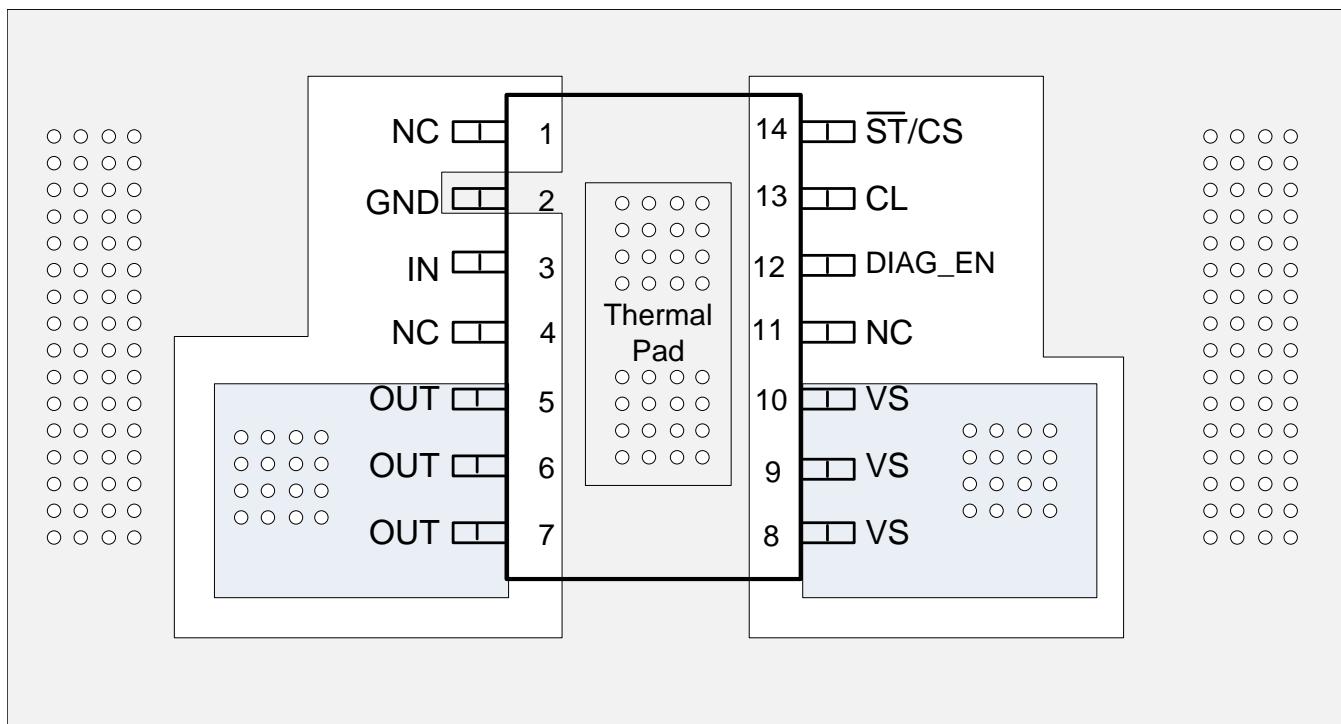

**Figure 50. Without a GND Network Layout**

## Layout Example (continued)

### 11.2.2 With a GND Network

With a GND network, tie the thermal pad as one trace to the board GND copper after the GND network.

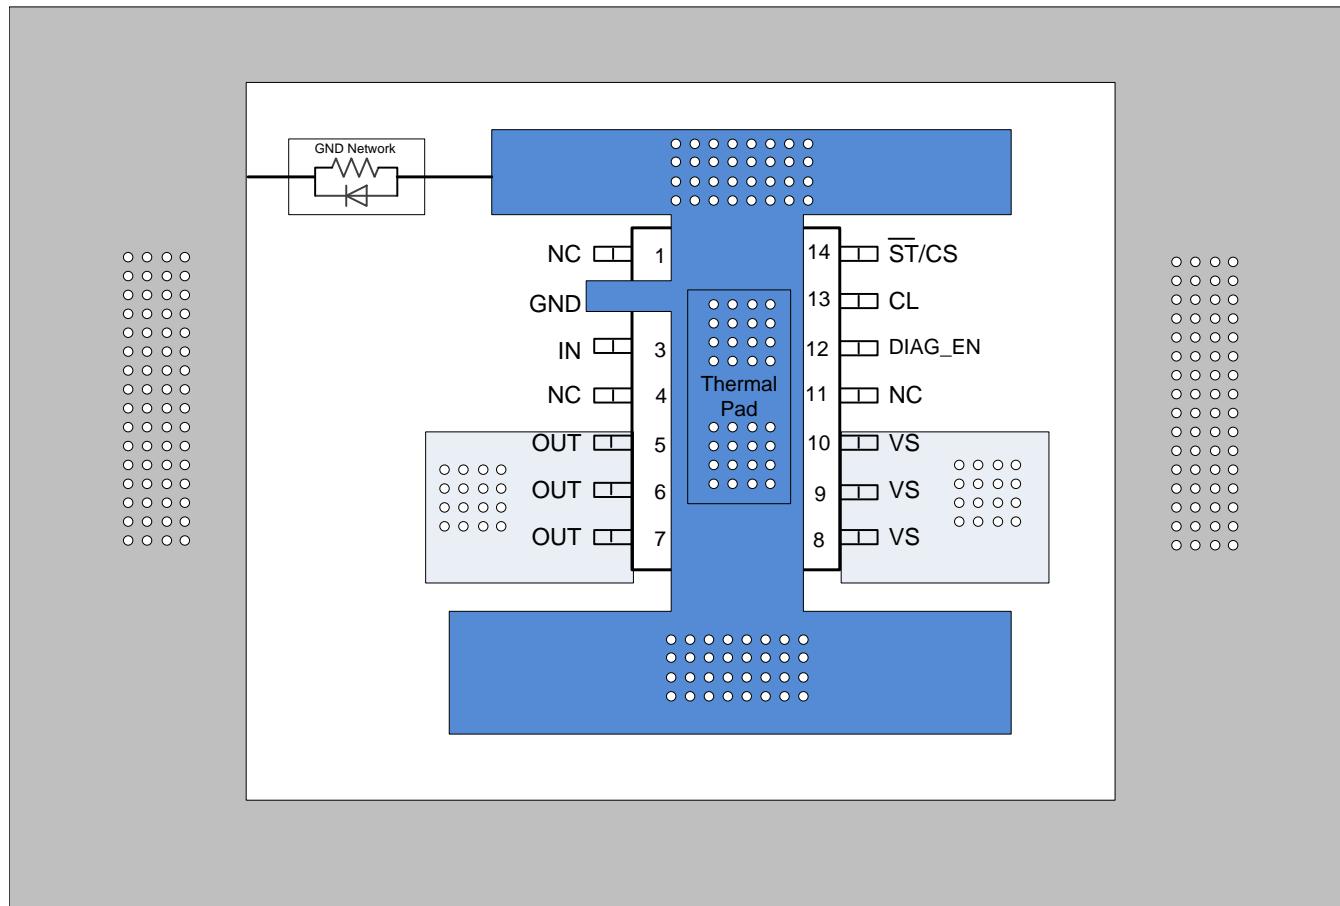


Figure 51. With a GND Network Layout

### 11.3 Thermal Considerations

This device possesses thermal shutdown (TSD) circuitry as a protection from overheating. For continuous normal operation, the junction temperature should not exceed the thermal-shutdown trip point. If the junction temperature exceeds the thermal-shutdown trip point, the output turns off. When the junction temperature falls below the thermal-shutdown trip point, the output turns on again.

Calculate the power dissipated by the device according to [Equation 13](#).

$$P_T = I_{OUT}^2 \times R_{DS(on)} + V_S \times I_{nom}$$

where

- $P_T$  = Total power dissipation of the device

(13)

After determining the power dissipated by the device, calculate the junction temperature from the ambient temperature and the device thermal impedance.

$$T_J = T_A + R_{\theta JA} \times P_T \quad (14)$$

## 12 Device and Documentation Support

### 12.1 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community.* Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.2 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 12.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 12.4 Glossary

[SLYZ022](#) — *TI Glossary.*

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS1H100AQPWPRQ1	ACTIVE	HTSSOP	PWP	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 125	1H100AQ	<b>Samples</b>
TPS1H100BQPWPRQ1	ACTIVE	HTSSOP	PWP	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 125	1H100BQ	<b>Samples</b>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.





www.ti.com

## PACKAGE OPTION ADDENDUM


19-Apr-2015

---

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

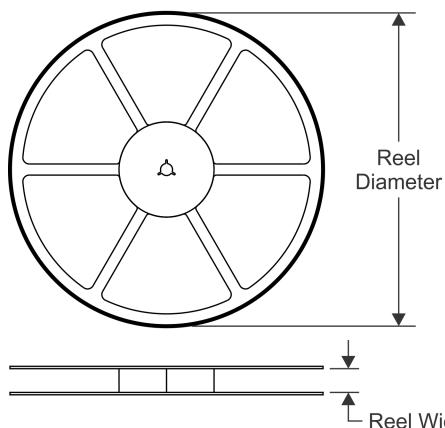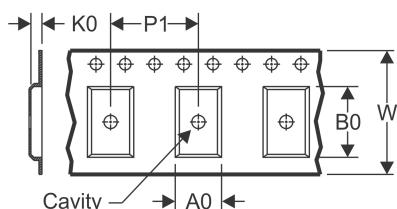
**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**

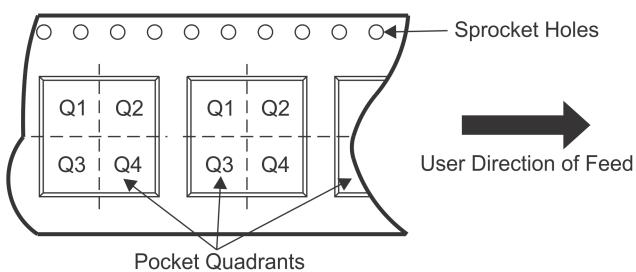
A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

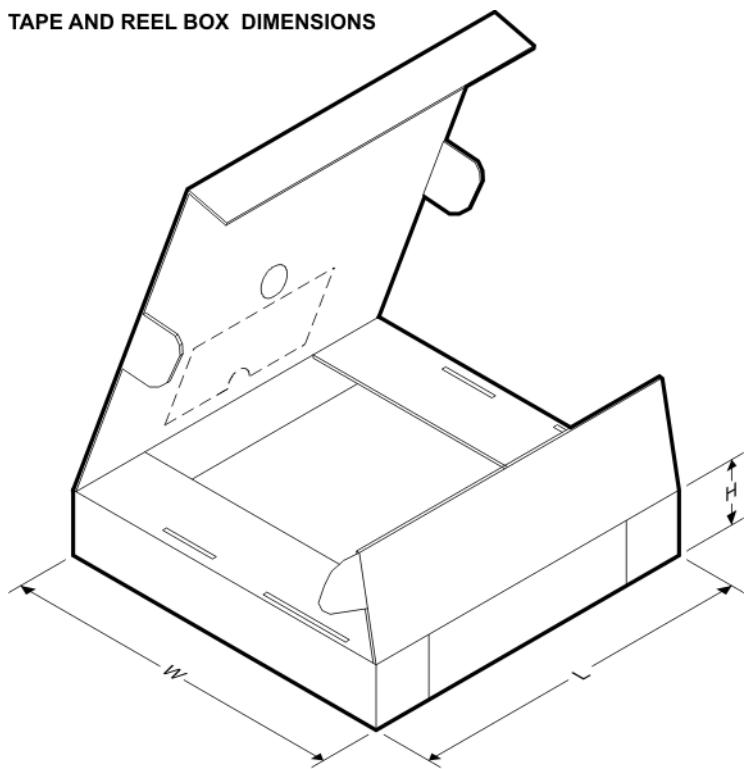Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS1H100AQPWPRQ1	HTSSOP	PWP	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TPS1H100BQPWPRQ1	HTSSOP	PWP	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1




**TAPE AND REEL BOX DIMENSIONS**

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS1H100AQPWPRQ1	HTSSOP	PWP	14	2000	367.0	367.0	38.0
TPS1H100BQPWPRQ1	HTSSOP	PWP	14	2000	367.0	367.0	38.0

PWP (R-PDSO-G14)

PowerPAD™ PLASTIC SMALL OUTLINE

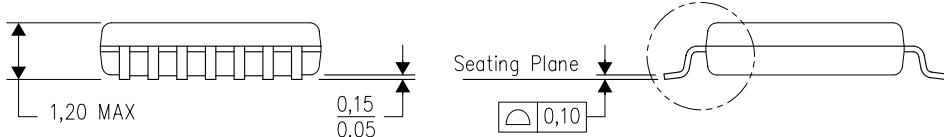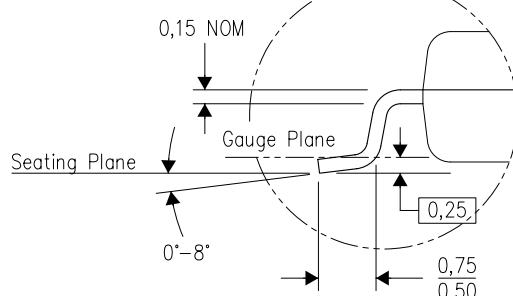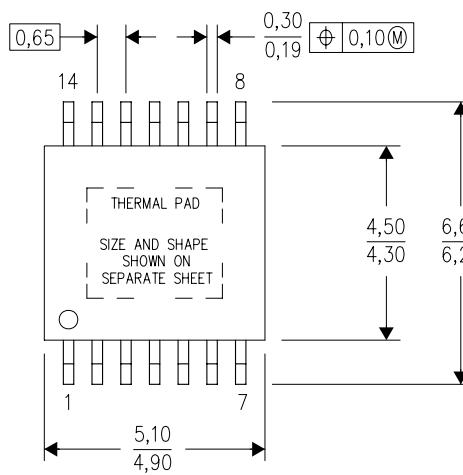

4073225-2/1 05/11

NOTES:

- All linear dimensions are in millimeters.
- This drawing is subject to change without notice.
- Body dimensions do not include mold flash or protrusions. Mold flash and protrusion shall not exceed 0.15 per side.
- This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 for information regarding recommended board layout. This document is available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
- See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
- Falls within JEDEC MO-153

PowerPAD is a trademark of Texas Instruments.

## PWP (R-PDSO-G14)


## PowerPAD™ SMALL PLASTIC OUTLINE

## THERMAL INFORMATION

This PowerPAD™ package incorporates an exposed thermal pad that is designed to be attached to a printed circuit board (PCB). The thermal pad must be soldered directly to the PCB. After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For additional information on the PowerPAD package and how to take advantage of its heat dissipating abilities, refer to Technical Brief, PowerPAD Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 and Application Brief, PowerPAD Made Easy, Texas Instruments Literature No. SLMA004. Both documents are available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

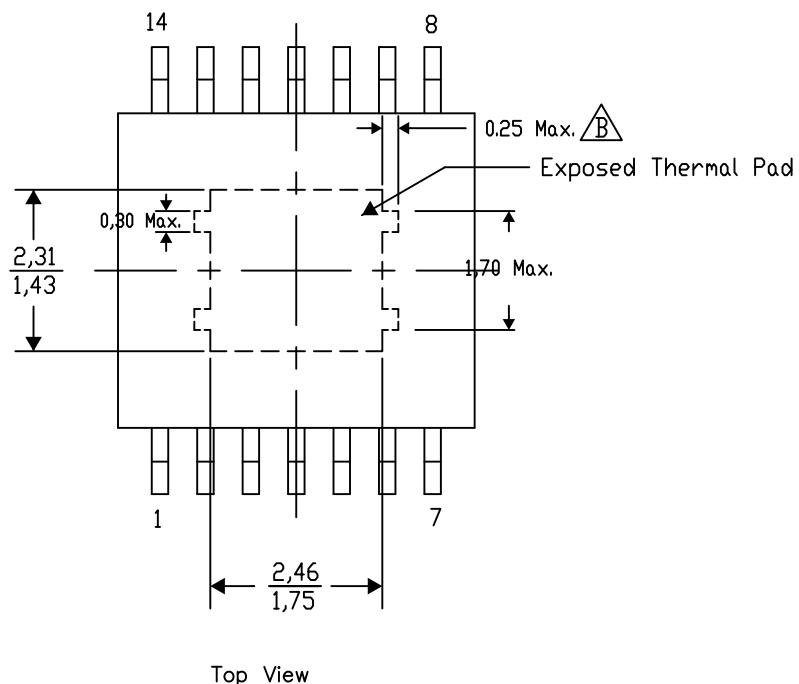

4206332-4/AO 01/16

NOTE: A. All linear dimensions are in millimeters

 Exposed tie strap features may not be present.

PowerPAD is a trademark of Texas Instruments

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products	Applications
Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>
	<b>TI E2E Community</b>
	<a href="http://e2e.ti.com">e2e.ti.com</a>