

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0441440005](#)
Status: **Active**
Overview: [Modular Jacks and Plugs](#)
Description: [Modular Jack, Right Angle, Low Profile, Surface Mount, 6/6](#)

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-43743-0001 \(PDF\)](#)
[Packaging Specification PK-70873-700 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E107635

General

Product Family Modular Jacks/Plugs
Series [44144](#)
Comments Flush Solder Tabs
Component Type PCB Jack
Magnetic No
Overview [Modular Jacks and Plugs](#)
Performance Category 3
Power over Ethernet (PoE) N/A
Product Name RJ11
UPC 800753923010


Physical

Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Inverted / Top Latch No
Jack Height 11.73mm
Lightpipes/LEDs None
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 2.340/g
Orientation Right Angle (Side Entry)
PCB Retention Yes
Packaging Type Embossed Tape on Reel
Pitch - Mating Interface 1.02mm
Pitch - Termination Interface 1.27mm
Plating min - Mating 1.270µm
Plating min - Termination 2.540µm
Ports 1
Positions / Loaded Contacts 6/6
Surface Mount Compatible (SMC) N/A
Temperature Range - Operating -40°C to +80°C
Termination Interface: Style Surface Mount
Wire/Cable Type N/A

Electrical

Current - Maximum per Contact 1.5A
Shielded No
Voltage - Maximum 125V

Solder Process Data

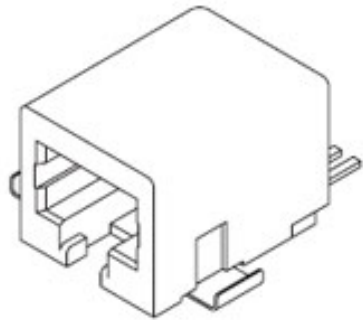

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/79/2015 (17
December 2015)

Halogen-Free

Status

Not Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS
ELV

Green Image
Not Relevant

Search Parts in this Series

[44144](#) Series

Mates With

FCC 68 Plugs

Duration at Max. Process Temperature (seconds)	030
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-70873-700*
Product Specification	PS-43743-0001
Sales Drawing	SD-44144-001

This document was generated on 06/13/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION