



Modular Plugs

- Shielded

Six-Contact, Six-Position Shielded

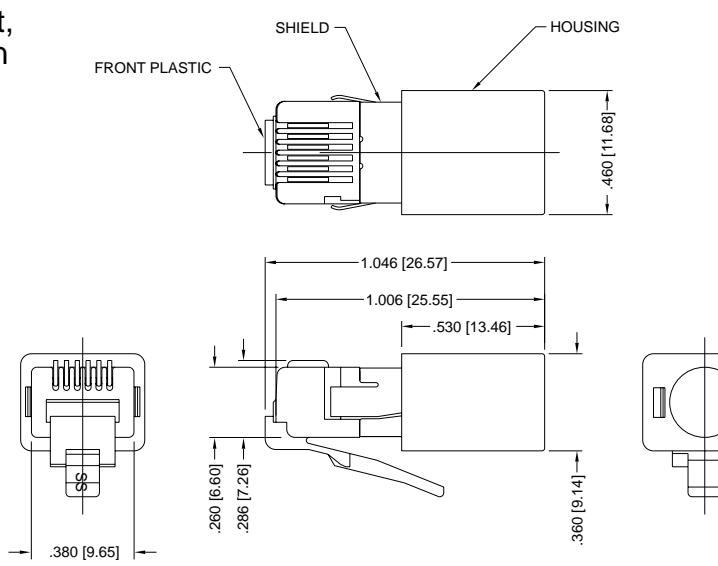

Eight-Contact, Eight-Position Shielded

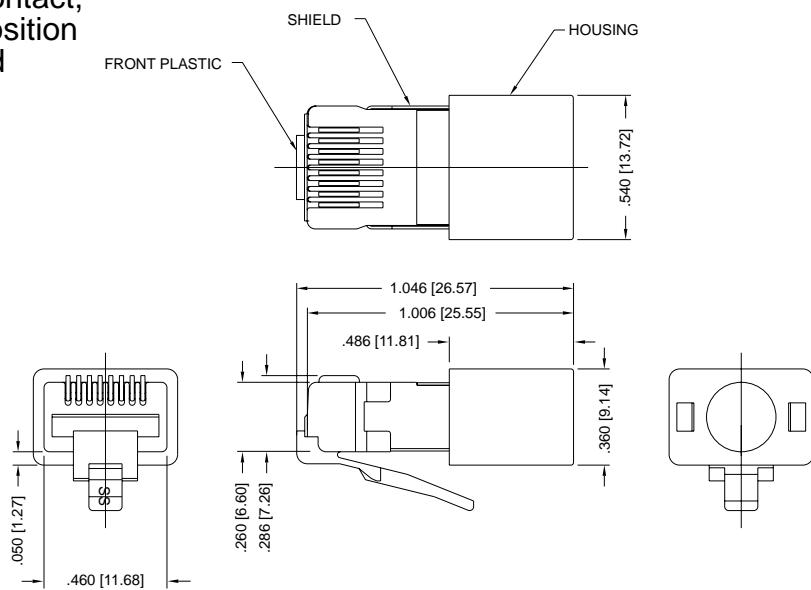

Quick Reference Chart

	Series	Description		Options					
		Contacts Inserted	Contact Positions	Keying Options					
				K1	K2	K3	K4	RMK4	RMK4R
RJ45*	36	06	06						
RJ45*	36	08	08	●	●	●	●		
RJ45*	36	10	10	●	●	●	●	●	●

*Typical applications.

Note: Configurations shown are the most common for typical applications.

For availability of other configurations not listed, consult Stewart.


All dimensions are in inches with metric values in brackets.

36 Series


Variations

Keying Options


K1-Key




K2-Key




K3-Key




K4-Key



RMK4-Key




RMK4R-Key




■ Fill
▨ Cutout

Wire Management Systems

Management Bar



Load Bar

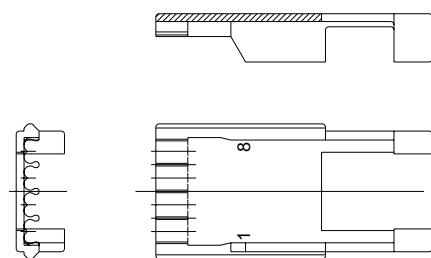

See next page for more variations.

36 Series


Modular Plugs

• Shielded

Variations


See previous page for other variations.

External Grommet Housing with Strain Relief




Shielded Plug Components


Front Plastic with Shield



Wire Management Load Bar



Housing




Ferrule




Plating Styles

Double Selective Plate (DS)

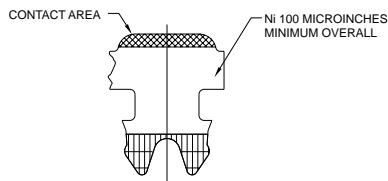



Selective Plate (SP)

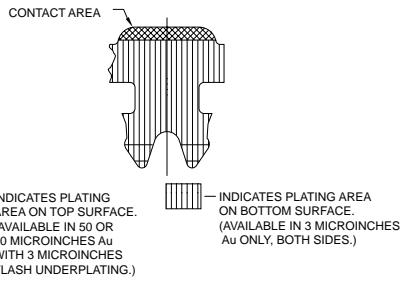

— INDICATES PLATING AREA ON TOP SURFACE.
(AVAILABLE IN 50 OR 30 MICROINCHES Au WITH 3 MICROINCHES FLASH UNDERPLATING.)

— INDICATES PLATING AREA ON BOTTOM SURFACE.
(AVAILABLE IN 3 MICROINCHES Au ONLY, BOTH SIDES.)

Ten-Contact, Ten-Position Shielded

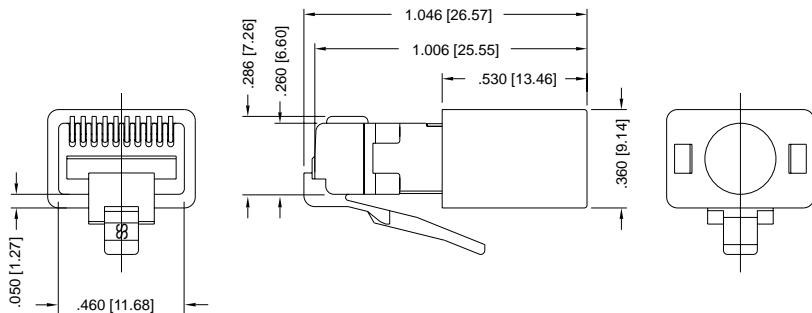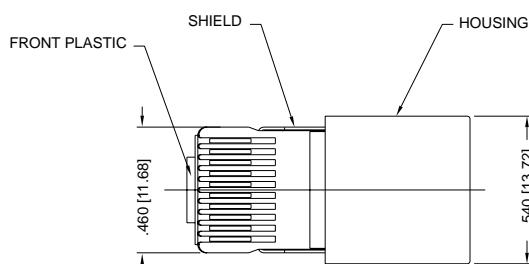

Quick Reference Chart

Series	Contacts Inserted	Contact Positions	Description						Options		
			Keying Options						External Housing with Strain Relief	Wire Management Systems	
			K1	K2	K3	K4	RMK4	RMK4R		Mgmt. Bar	Load Bar
RJ-11*	36	06	06								●
	36	08	08	●	●	●	●			●	●
	36	10	10	●	●	●	●	●	●	●	●

*Typical applications.

Note: Configurations shown are the most common for typical applications. For availability of other configurations not listed, consult Stewart.

How to Order

EXAMPLE: 940 - 30 - SP - 36 08 08 - K1 - 031 - X

Contact styles

- 937 for stranded conductor
- 940 for solid conductor

Plating options (microinches Au)

- Leave blank for standard 50
- 30 - Optional

Plating styles

- SP - Selective plate
- DS - Double selective plate

Series number

Other options (consult Stewart)

Conductor diameter

- Leave blank for .037" [.940]
- 031 for .031" [.790]

Keying options

- K1, K2, K3, K4, RMK4, RMK4R

Number of contact positions

- 06, 08, or 10

Number of contacts inserted

- 06, 08, or 10

Note: For information on tooling, see pages 92-94.

All dimensions are in inches with metric values in brackets.