


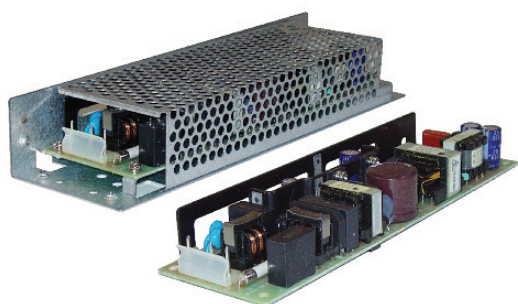

ZWS-AF Series

50 - 150W

Single output power supplies

- Universal Input (85 - 265VAC)
- Power factor Corrected
- Input transient Corrected
- Peak Power capability
- 2 year warranty
- High quality design

Key Market Segments & Applications

Factory Automation	Process Control, NC-Machining, Automotive, Packaging Equipment,
Test & Measurement	Materials Handling, Chemical Processing, Robots Burn-in & Test, Automated Test, Instrumentation, Measurement, Detection
Light Industrial	Gaming, Vending, Printers

ZWS-AF Features and Benefits

Features

- Input Transient Protected
- 2 Year Warranty
- Power Factor Corrected
- Peak Power Capability

Benefits

- Withstands Harsh Environments
- Low Cost of Ownership
- Supports Global Use
- Can Drive High current Start Up Devices

Specifications

MODELS			ZWS50AF	ZWS75AF	ZWS100AF	ZWS150AF
ITEMS						
AC Input Voltage range	VAC		85-265VAC (47-63Hz)			
DC Input Voltage range	VDC		120-370VDC			
Input Current (Typ)	(1)	A	0.8/0.4	1.2/0.6	1.4/0.7	2.0/1.0
Inrush Current		A	14/28 25°C Ambient, Cold Start			
Power Factor	(1)	-	Meets EN61000-3-2 (0.99/0.95)			
Maximum Ripple and Noise		mV	3.3V & 5V :120mV, 12V to 24V : 150mV, 36V & 48V : 200mV			
Temperature Coefficient		-	<0.02%/°C			
Overcurrent Protection	(4)	-	>105% of Peak Current Capability			
Hold Up Time (Typ)	(1)	ms	20			
Leakage Current		-	0.5mA max 0.1mA (Typ) at 100VAC 0.16mA (Typ) at 230VAC			
Remote On / Off		-	See installation manual (Not available with /A cover option)			
Operating Temperature		-	Convection cooling - See table on page 2			
Operating Temperature		-	0.7m/s air -10°C to +70°C, Derate linearly to 70% load from 60°C to 70°C (2)			
Storage Temperature		-	-30° to +85°C			
Humidity (non condensing)		-	Operating: 30 - 90% RH, storage 10-95% RH			
Withstand Voltage		-	I/P~Gnd 2kVAC (20mA), I/P~O/P 3kVAC (20mA), O/P~Gnd 500VAC (100mA) for 1 min.			
Isolation Resistance		-	>100M at 25C & 70%RH, Output to Ground 500VDC			
Vibration (non operating)		-	10 - 55Hz (1 minute sweep), 19.6m/s ² constant X, Y, Z 1 hour			
Shock (in packaging)		-	< 196.1 m/s ²			
Safety Agency Approvals		-	UL/CSA60950-1, EN60950-1, EN50178, CE Mark			
Conducted & Radiated EMI		-	Designed to meet EN55011, EN55022-B, FCC Class B, VCCI-B			
Immunity		-	Designed to meet EN61000-4-2,-3,-4,-5,-6,-8,-11			
Weight (Typ)		g	210	290	380	500
Size (W x H x D)		mm	55 x 26 x 195	55 x 32 x 222	62 x 35 x 222	75 x 40 x 222
Warranty		yrs	2 Years			

Notes:

- (1) 100/200VAC (2) ZWS150AF -10 to 60°C, Derate linearly to 70% load from 50°C to 60°C
(3) The peak current draw must not exceed a 10 second duration with a duty cycle of 35%
(4) Constant current limit with automatic recovery. Do not operate in a over-load or shorted output condition for more than 30 seconds.
(5) An overvoltage condition on the output will shut down the power supply. The power supply must be re-set by cycling the AC input.



Model Selector

Model	Voltage	Output Adjust Range (V)	Max Curr. (A)	Max Peak Curr. (A) ³	Max Output Power (W)	Peak Output Power ³ (W)	Efficiency (%)	Max Load Reg.(mV)	Max Line Reg.(mV)	OVP (V) ⁵
ZWS75AF3	3.3V	2.85-3.63	15.0	-	49.5	-	67	40	20	3.79-4.95
ZWS150AF3	3.3V	2.85-3.63	30.0	-	99.0	-	74	40	20	3.79-4.95
ZWS50AF5	5V	4.5-5.5	10.0	-	50.0	-	75	40	20	5.75-7.00
ZWS75AF5	5V	4.5-5.5	15.0	-	75.0	-	75	40	20	5.75-7.00
ZWS100AF5	5V	4.5-5.5	20.0	-	100.0	-	75	40	20	5.75-7.00
ZWS150AF5	5V	4.5-5.5	30.0	-	150.0	-	77	40	20	5.75-7.0
ZWS50AF12	12V	10.8-13.2	4.3	5.2	51.6	62.4	78	96	48	13.8-16.2
ZWS75AF12	12V	10.8-13.2	6.3	7.5	75.6	90.0	78	96	48	13.8-16.2
ZWS100AF12	12V	10.8-13.2	8.5	10.0	102.0	120.0	79	96	48	13.8-16.2
ZWS150AF12	12V	10.8-13.2	12.5	15.0	150.0	180.0	79	96	48	13.8-16.2
ZWS50AF15	15V	13.5-16.5	3.5	4.2	52.5	63.0	79	120	60	17.3-20.3
ZWS75AF15	15V	13.5-16.5	5.0	6.0	75.0	90.0	79	120	60	17.3-20.3
ZWS100AF15	15V	13.5-16.5	6.7	8.0	100.5	120.0	79	120	60	17.3-20.3
ZWS150AF15	15V	13.5-16.5	10.0	12.0	150.0	180.0	81	120	60	17.3-20.3
ZWS50AF24	24V	21.6-26.4	2.1	2.6	50.4	62.4	81	150	96	27.6-32.4
ZWS75AF24	24V	21.6-26.4	3.2	3.8	76.8	91.2	82	150	96	27.6-32.4
ZWS100AF24	24V	21.6-26.4	4.3	5.0	103.2	120.0	81	150	96	27.6-32.4
ZWS150AF24	24V	21.6-26.4	6.3	7.5	151.2	180.0	82	150	96	27.6-32.4
ZWS75AF36	36V	32.4-39.6	2.1	2.5	75.6	90.0	82	200	144	41.4-48.6
ZWS100AF36	36V	32.4-39.6	2.8	3.4	100.8	122.4	82	200	144	41.4-48.6
ZWS150AF36	36V	32.4-39.6	4.2	5.0	151.2	180.0	82	200	144	41.4-48.6
ZWS75AF48	48V	43.2-52.8	1.6	1.9	76.8	91.2	82	240	192	55.2-64.8
ZWS100AF48	48V	43.2-52.8	2.1	2.5	100.8	120	82	240	192	55.2-64.8
ZWS150AF48	48V	43.2-52.8	3.2	3.8	153.6	182.4	82	240	192	55.2-64.8

Derating - Convection Cooling

Model	40°C	45°C	50°C	55°C	60°C
ZWS50AF	100%	100%	100%	85%	70%
ZWS75AF	100%	100%	100%	85%	70%
ZWS100AF	100%	100%	100%	80%	60%
ZWS150AF	100%	87%	75%	62%	50%





Options

Suffix	Description
-	Molex Input & Output Connectors
/A	With cover & L Bracket
/J	JST Input & Output Connectors
/JA	JST Connectors & Cover

For full data and drawings please visit
www.emea.tdk-lambda.com/www/zws



Outline Drawing ZWS-AF Series

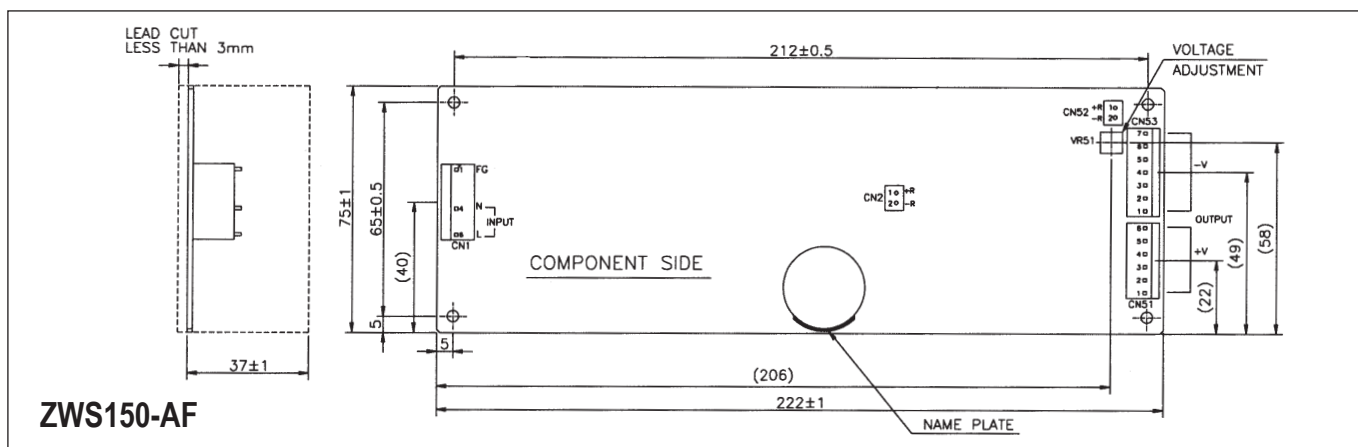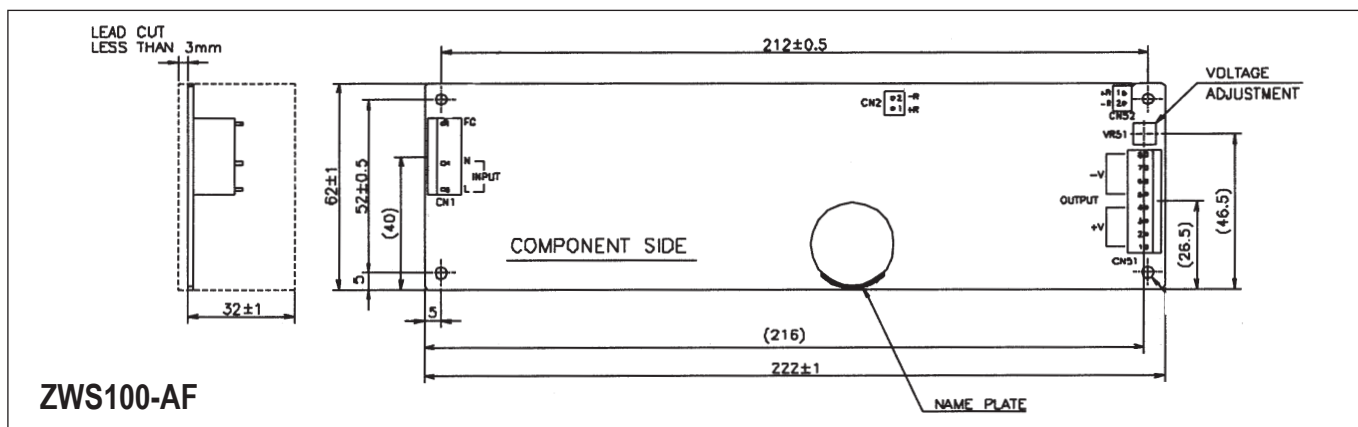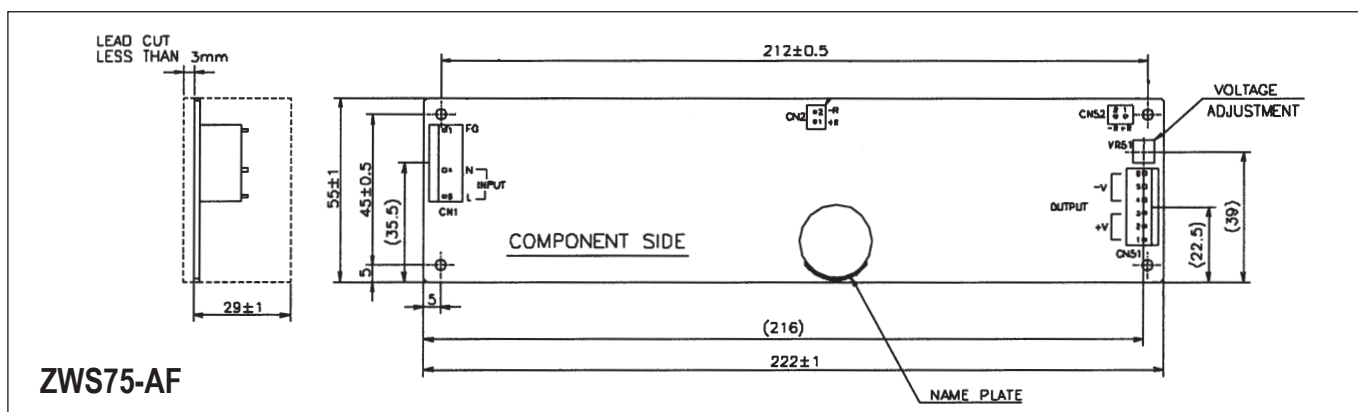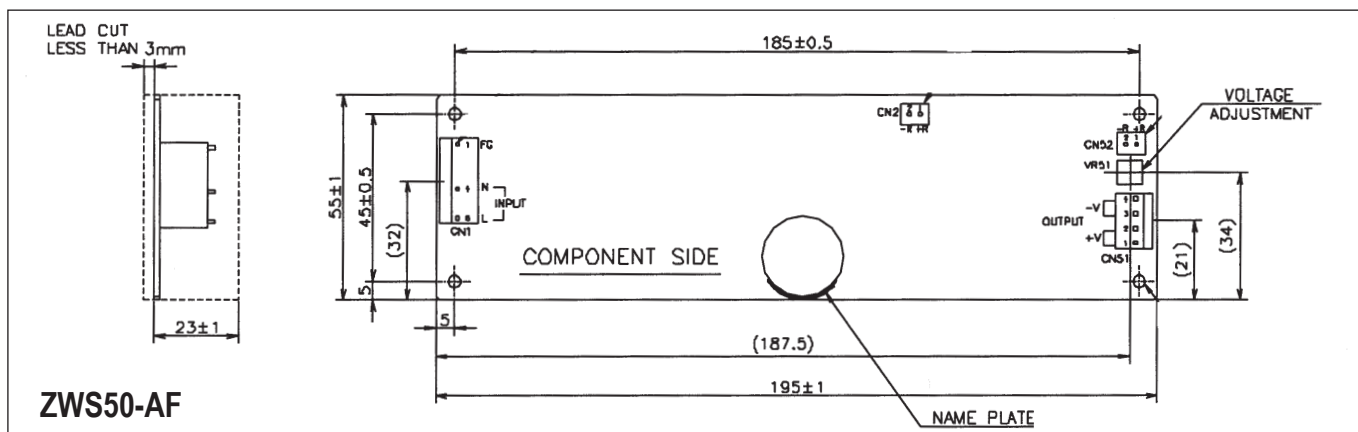



TDK-LAMBDA EMEA

www.emea-tdk-lambda.com



TDK-Lambda France SAS

ZAC des Delaches
BP 1077-Gometz-le-Chatel
91940 Les Ulis
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



Nemic Lambda Ltd.

Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@nemic.co.il
www.nemic.co.il



Russia

Technical Support:
St Petersburg
Tel: +7 (812) 6580463
Sales:
Moscow
Tel: +7 (499) 7557732
info@tdk-lambda.ru
www.tdk-lambda.ru

LOCAL DISTRIBUTION