


Supercapacitors, Radial Pin, Commercial Grade, FE, 0.47 F, -20/+80%, 5.5 V, Pin Leads, Lead Spacing = 10.2mm

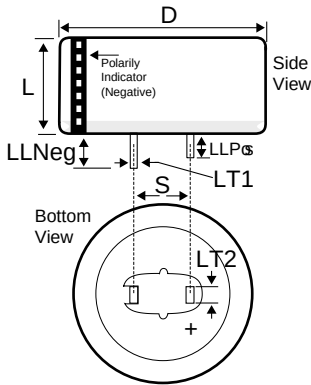

**Dimensions**

|                    |                 |
|--------------------|-----------------|
| <b>D</b>           | 28.5mm +/-0.5mm |
| <b>L</b>           | 16.5mm MAX      |
| <b>S</b>           | 10.2mm +/-0.5mm |
| <b>LL Negative</b> | 6.4mm MIN       |
| <b>LL Positive</b> | 6.1mm MIN       |

**Packaging Specifications**

|                   |           |
|-------------------|-----------|
| <b>Lead:</b>      | Pin Leads |
| <b>Packaging:</b> | Bulk      |

**General Information**

|                       |                                           |
|-----------------------|-------------------------------------------|
| <b>Series:</b>        | FE                                        |
| <b>Description:</b>   | Radial Cylindrical Double Layer Capacitor |
| <b>RoHS:</b>          | Yes                                       |
| <b>Miscellaneous:</b> | DischargeValue = 0.75 F                   |

**Specifications**

|                               |                   |
|-------------------------------|-------------------|
| <b>Capacitance:</b>           | 0.47 F            |
| <b>Capacitance Tolerance:</b> | -20/+80%          |
| <b>Voltage DC:</b>            | 5.5 VDC           |
| <b>Temperature Range:</b>     | -40/+70C          |
| <b>Rated Temperature:</b>     | 70C               |
| <b>Resistance:</b>            | 1800 mOhms (1kHz) |