


Film, Metallized Polypropylene, Commercial Grade, R75L, 0.022 uF, 10%, 560 V, 85C, Lead Spacing = 10mm

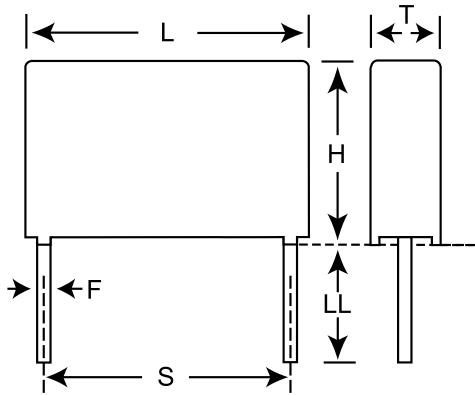

Dimensions	
L	13mm +0.3mm
H	9mm +0.1mm
T	4mm +0.2mm
S	10mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm

General Information	
Dielectric:	Metallized Polypropylene
Style:	Radial
Series:	R75L
Features:	Pulse
RoHS:	Yes
Lead:	Wire Leads

Specifications	
Capacitance:	0.022 uF
Capacitance Tolerance:	10%
Voltage DC:	560 VDC, 336 VDC (105C)
Voltage AC:	250 VAC
Temperature Range:	-55/+105C
Rated Temperature:	85C
Dissipation Factor:	4% 1kHz, 6% 10kHz, 25% 100kHz
Insulation Resistance:	1360 GOhms
Max dVdt:	1,500 V
Inductance:	10 nH

Packaging Specifications

Packaging: Bulk, Bag

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.