
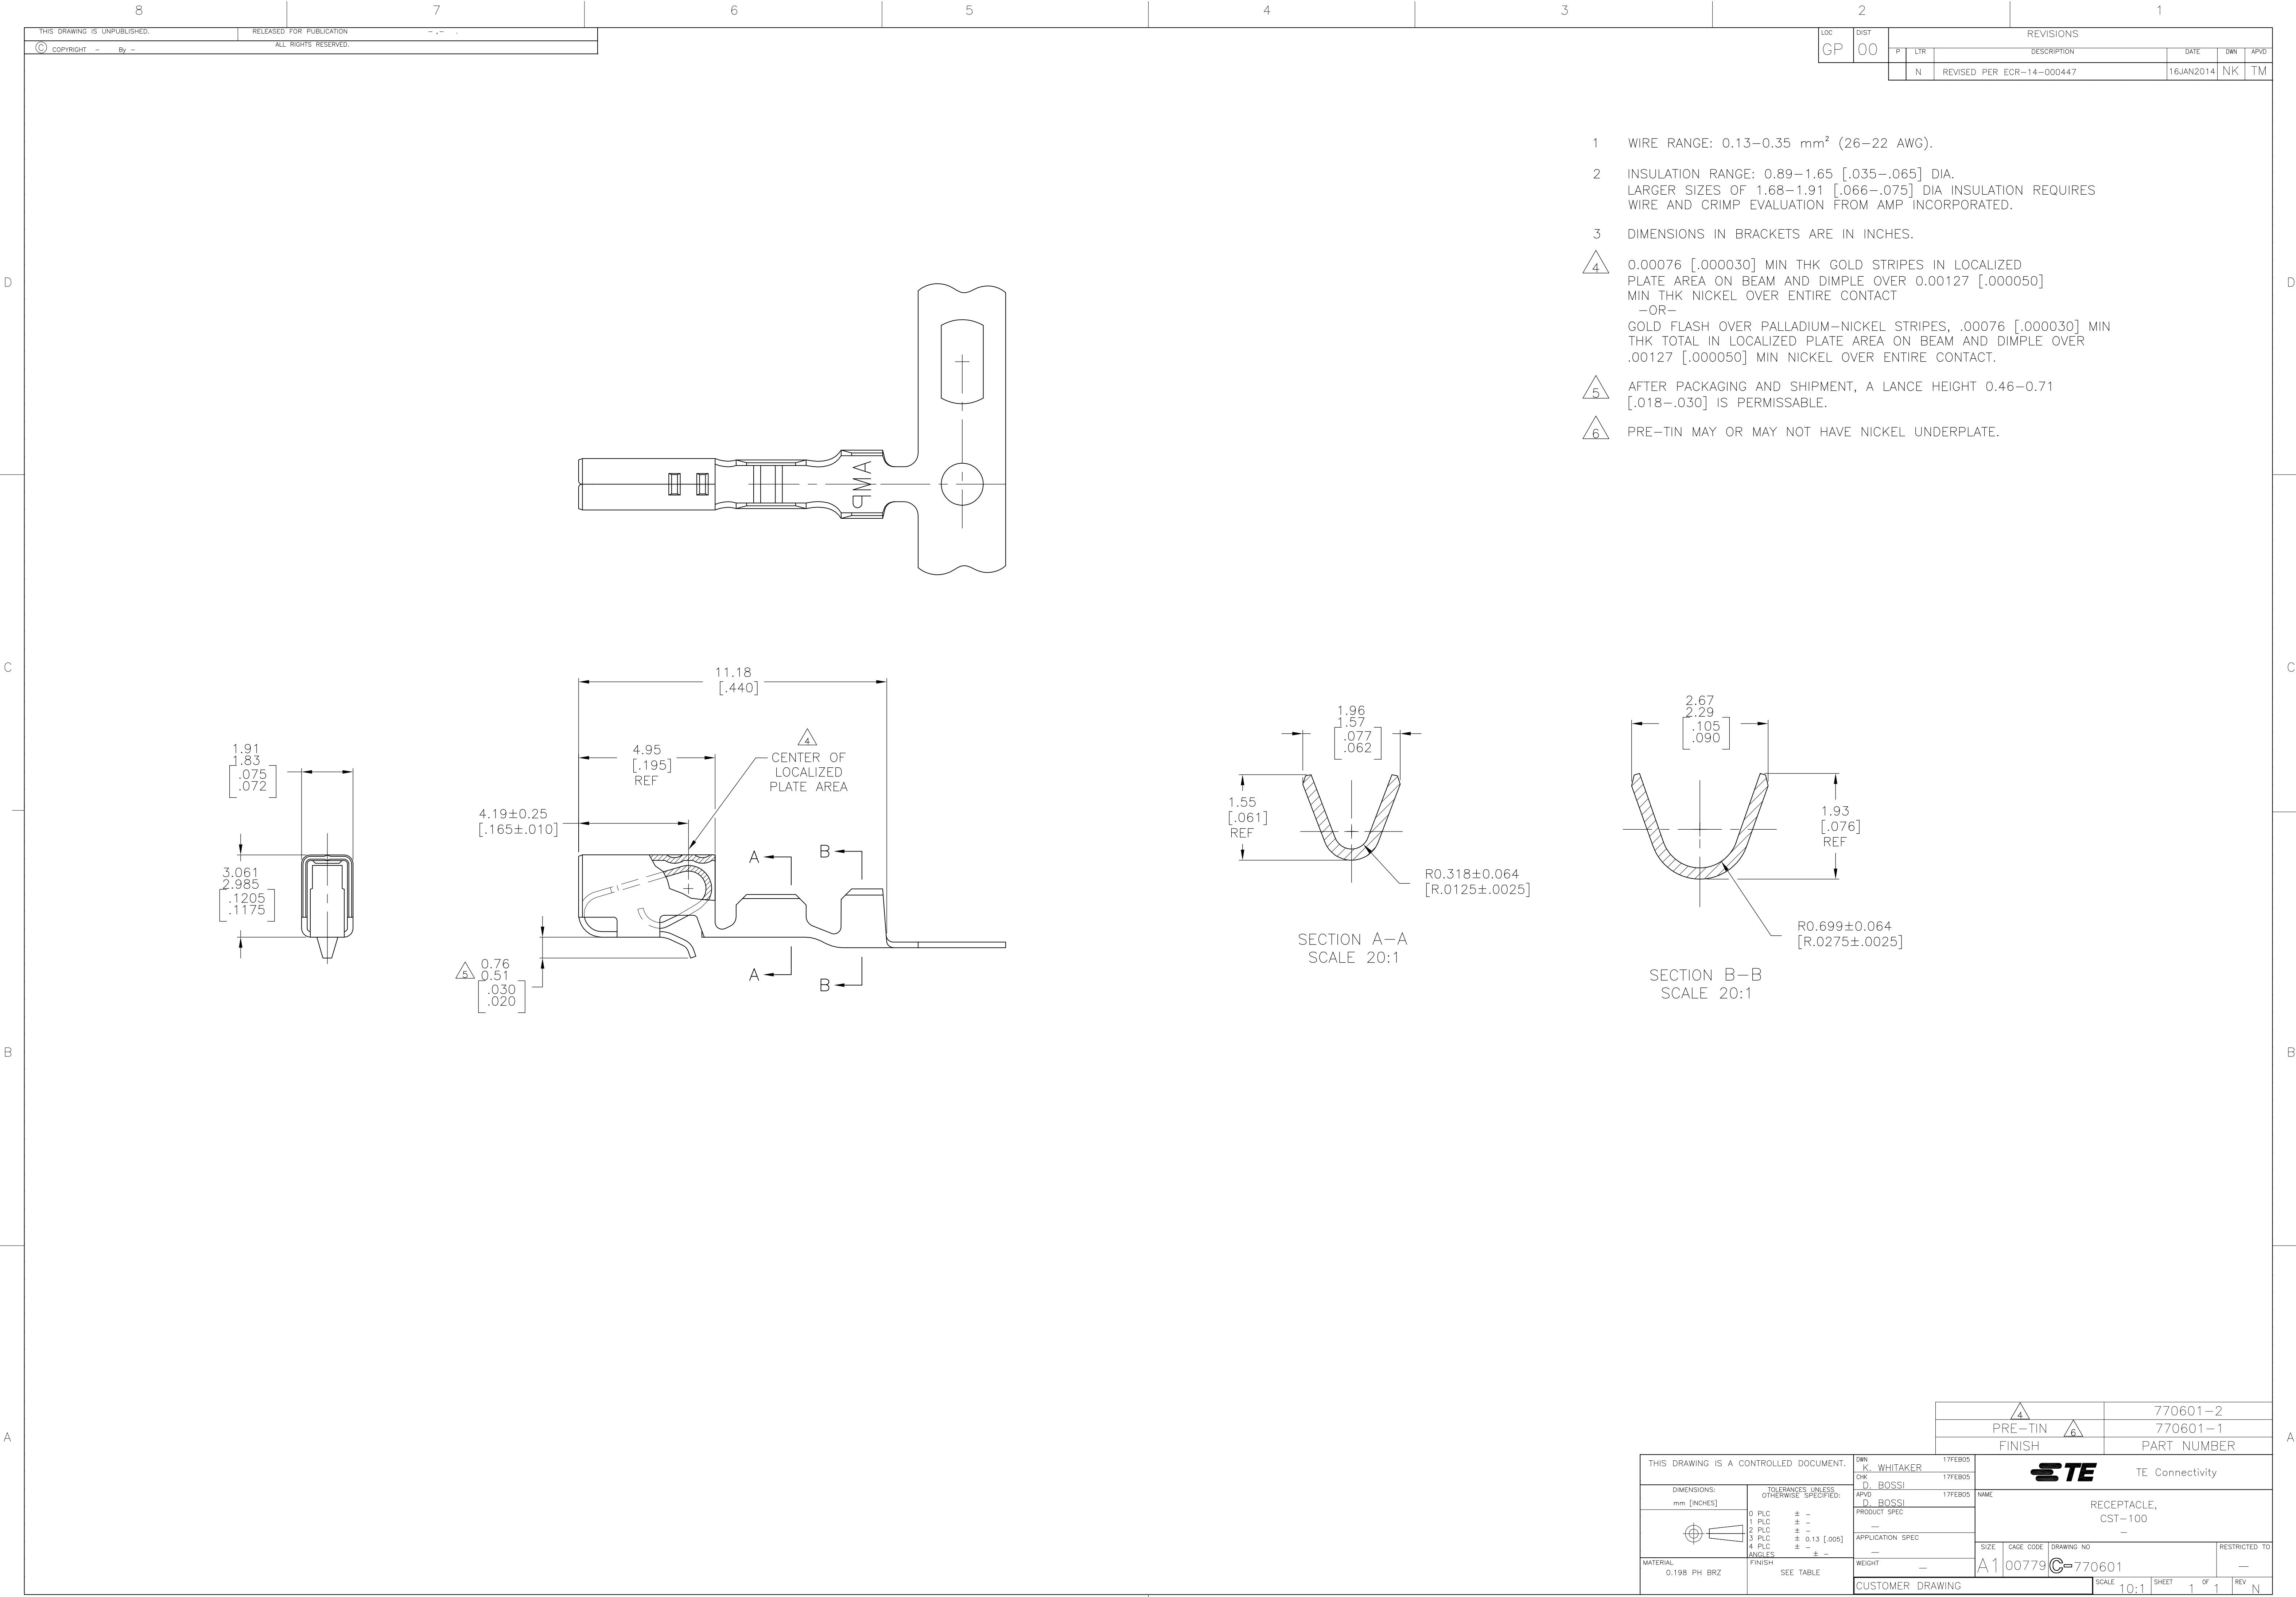




- 1 WIRE RANGE: 0.13–0.35 mm² (26–22 AWG).
- 2 INSULATION RANGE: 0.89–1.65 [.035–.065] DIA.
LARGER SIZES OF 1.68–1.91 [.066–.075] DIA INSULATION REQUIRES WIRE AND CRIMP EVALUATION FROM AMP INCORPORATED.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4 0.00076 [.000030] MIN THK GOLD STRIPES IN LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER 0.00127 [.000050] MIN THK NICKEL OVER ENTIRE CONTACT
–OR–
GOLD FLASH OVER PALLADIUM–NICKEL STRIPES, .00076 [.000030] MIN THK TOTAL IN LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER .00127 [.000050] MIN NICKEL OVER ENTIRE CONTACT.
- 5 AFTER PACKAGING AND SHIPMENT, A LANCE HEIGHT 0.46–0.71 [.018–.030] IS PERMISSABLE.
- 6 PRE-TIN MAY OR MAY NOT HAVE NICKEL UNDERPLATE.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN K. WHITAKER	17FEB05	4 PRE-TIN FINISH 6 770601-2 770601-1 PART NUMBER			
				CHK D. BOSSI	17FEB05				
				APVD D. BOSSI	17FEB05				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		RECEPTACLE, CST-100 -			
		0 PLC ± -		PRODUCT SPEC					
		1 PLC ± -		-					
		2 PLC ± 0.13 [.005]		APPLICATION SPEC					
		3 PLC ± -		-					
4 PLC ± -		ANGLES ± ±		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL 0.198 PH BRZ		FINISH SEE TABLE		WEIGHT -		A1 00779		C=770601	-
CUSTOMER DRAWING						SCALE 10:1		SHEET 1 OF 1	REV N