
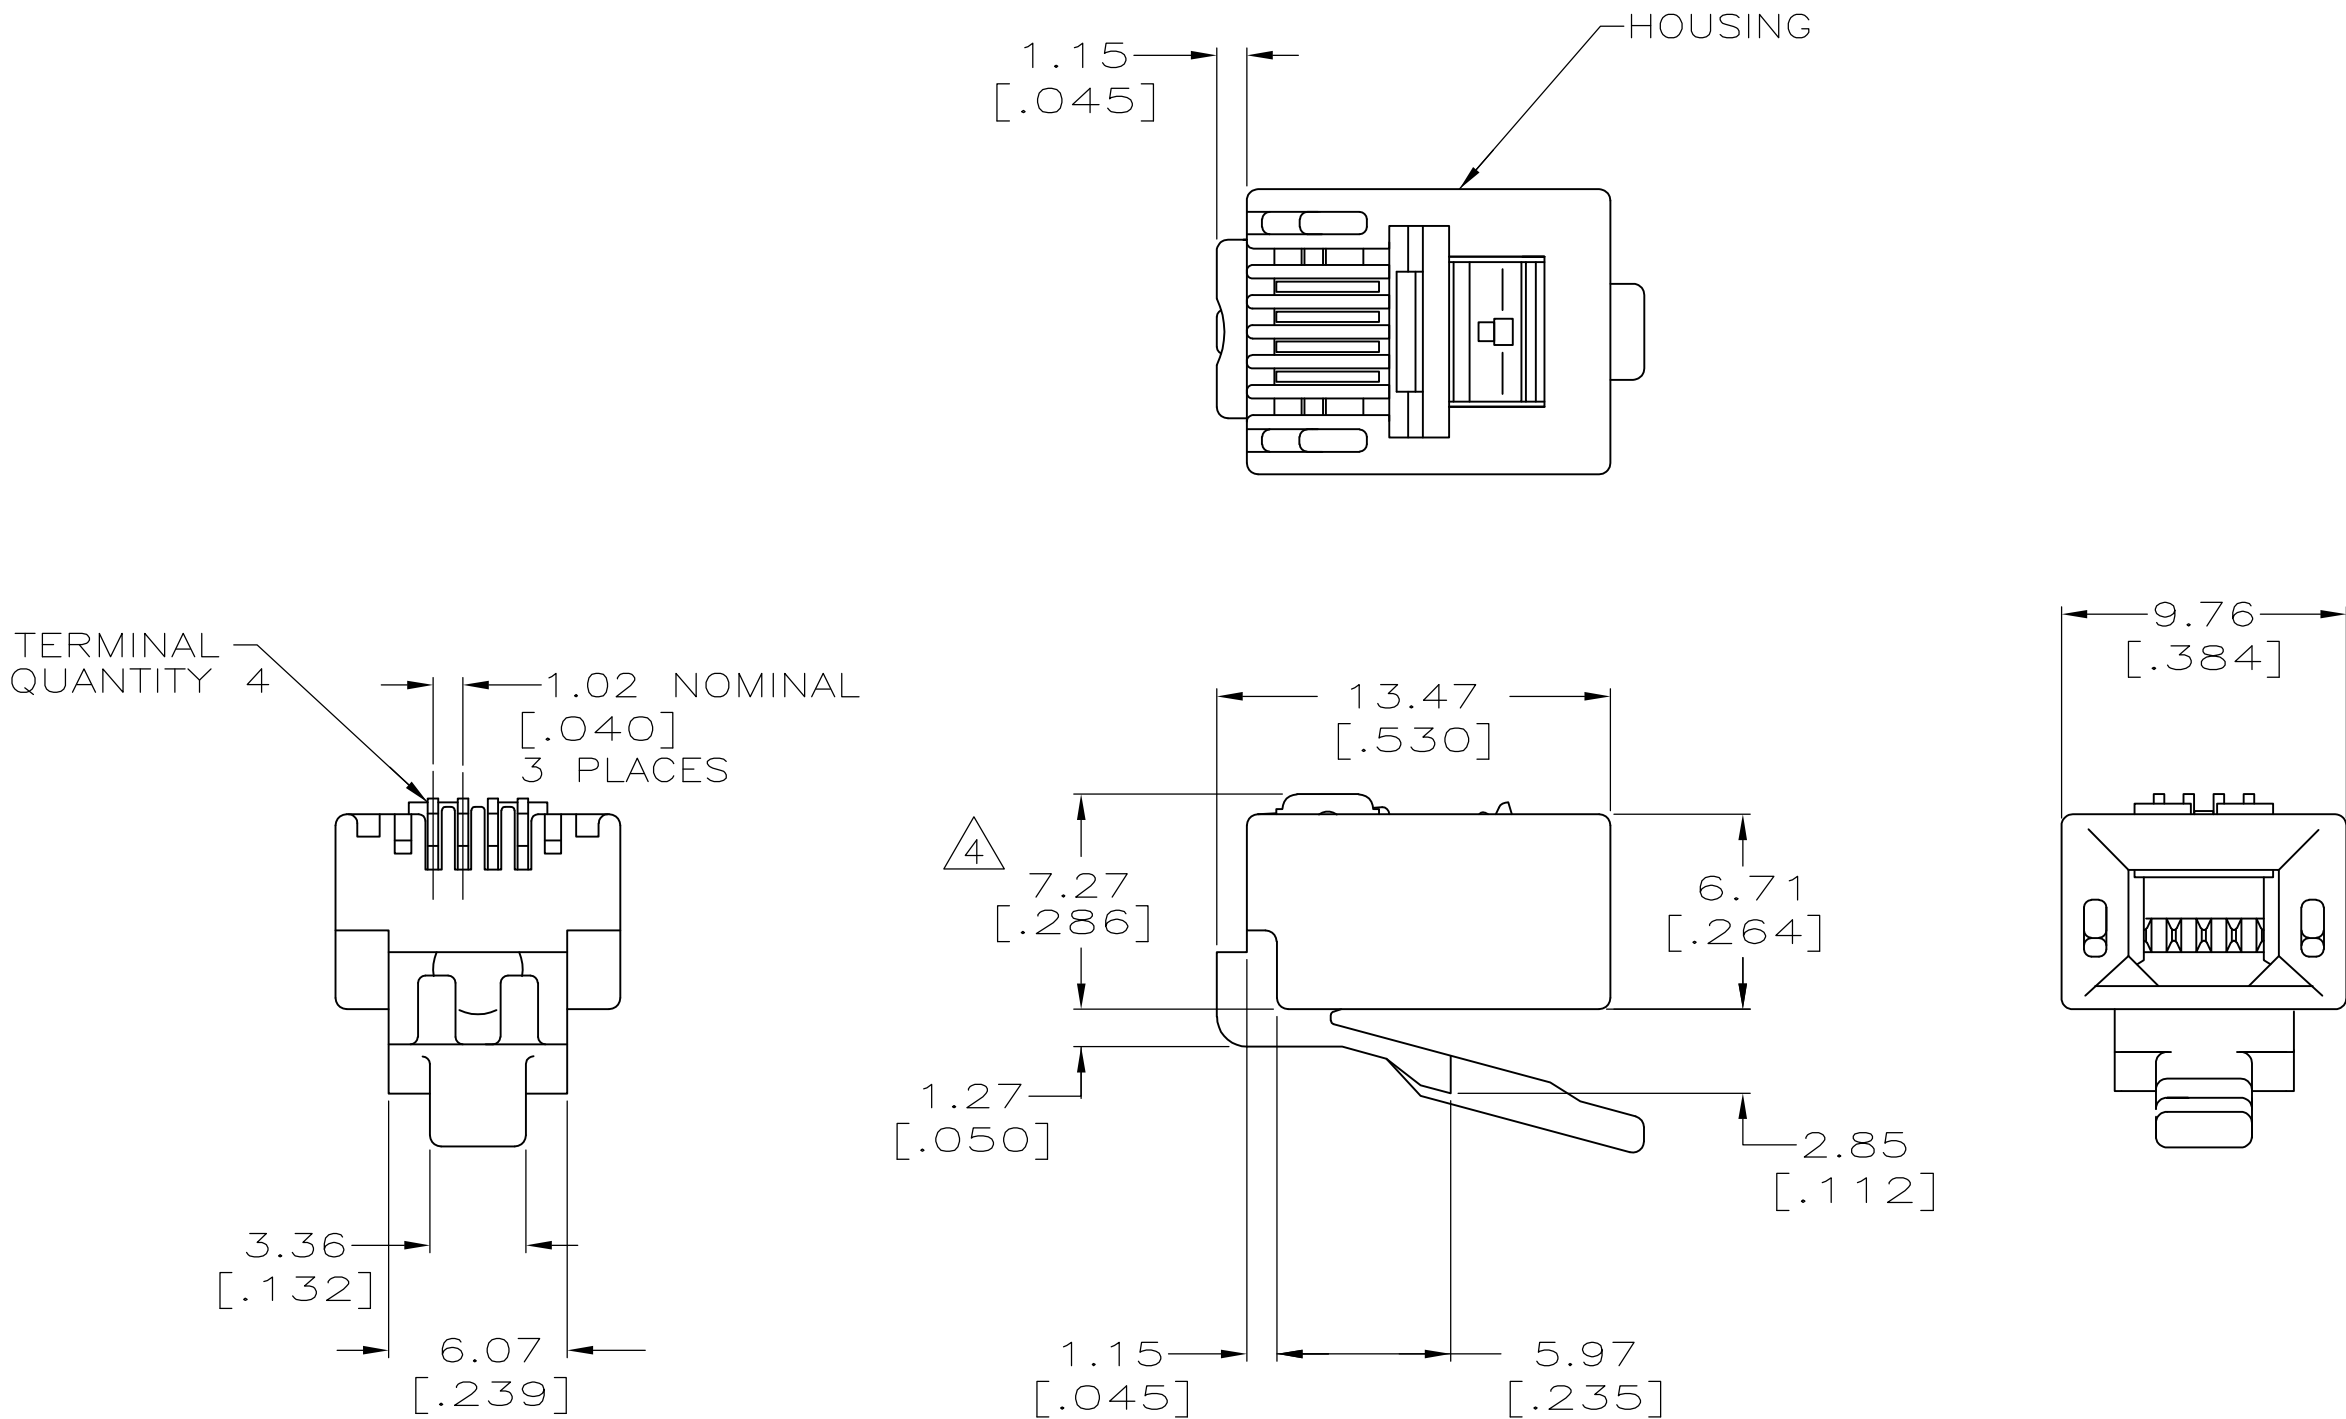


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		D	REV ECO-14-011315	25JUL2014	GG	LS



1. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
2. MATERIAL: HOUSING- POLYCARBONATE, CLEAR
TERMINAL- .36 [.014] THICK PHOSPHOR BRONZE
PLATED WITH .178 μ m [.000007] THICK
GOLD IN LOCALIZED PLATE AREA OVER .762 μ m
[.000030] THICK PALLADIUM NICKEL IN LOCALIZED
PLATE AREA OVER 2.54 μ m [.000100] THICK
NICKEL ON ENTIRE CONTACT.
3. PLUG WILL ACCEPT 24 OR 26 AWG SOLID
WIRE HAVING A MAXIMUM INSULATION
DIAMETER OF 0.99[.039] AND A MAXIMUM
DIAMETER ROUND CABLE JACKET OF 2.79
[.110].
4. TERMINATED DIMENSION 6.15[.242]
MAXIMUM.
6. 100 ASSEMBLIES PER PACKAGE.

	5-569030-3
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 29FEB2008	 TE Connectivity							
		CHK B. MCNEILL 29FEB2008								
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD B. MCNEILL 29FEB2008	NAME							
	0 PLC ± - 	PRODUCT SPEC	MODULAR PLUG ASSEMBLY, 4 POSITION, ROUND CABLE, SOLID WIRE							
	1 PLC ± -	108-1163								
	2 PLC ± -	APPLICATION SPEC								
	3 PLC ± -	114-6016								
	4 PLC ± -									
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
- 	- 	-	A2	00779	C=569030	-				
CUSTOMER DRAWING					SCALE	4:1	SHEET	1 of 1	REV	D