

LED PANEL MOUNT INDICATOR

SUPERFLAT BEZEL, DC OPERATION

MOUNTING HOLE, Ø 8mm

PART NO.	COLOR	VOLTAGE V _{OP} [V] DC	CURRENT I _{OP typ.} [mA] DC	LUMI. INTENSITY LED I _{V typ.} [mcd]	DOMINANT WAVELENGTH λ _D [nm]
SATIN CHROME BEZEL					
WL-19010251	GREEN	12V	20	10	568
WL-19010252	YELLOW	12V	20	10	588
WL-19010253	RED	12V	20	15	625
WL-19010351	GREEN	24V	20	10	568
WL-19010352	YELLOW	24V	20	10	588
WL-19010353	RED	24V	20	15	625
WL-19010451	GREEN	28V	20	10	568
WL-19010452	YELLOW	28V	20	10	588
WL-19010453	RED	28V	20	15	625
BLACK CHROME BEZEL					
WL-19011251	GREEN	12V	20	10	568
WL-19011252	YELLOW	12V	20	10	588
WL-19011253	RED	12V	20	15	625
WL-19011351	GREEN	24V	20	10	568
WL-19011352	YELLOW	24V	20	10	588
WL-19011353	RED	24V	20	15	625
WL-19011451	GREEN	28V	20	10	568
WL-19011452	YELLOW	28V	20	10	588
WL-19011453	RED	28V	20	15	625
MATTE CHROME BEZEL					
WL-19012251	GREEN	12V	20	10	568
WL-19012252	YELLOW	12V	20	10	588
WL-19012253	RED	12V	20	15	625
WL-19012351	GREEN	24V	20	10	568
WL-19012352	YELLOW	24V	20	10	588
WL-19012353	RED	24V	20	15	625
WL-19012451	GREEN	28V	20	10	568
WL-19012452	YELLOW	28V	20	10	588
WL-19012453	RED	28V	20	15	625


NOTES

- Maximum panel thickness 8mm
- Storage temperature
T_{STG}: -25°C – +80°C
- Ambient temperature
T_A: -20°C – +60°C
- DC operation only
- Voltage tolerance
V_{OP}: ±10%
- Electro-optical ratings at
T_A=25°C
- Degree of protection: IP67 in accordance to DIN EN 60529 when using the supplied gasket
- Mounting hole
8 + 0.2mm
- 2.8 x 0.8mm terminals are standard
- Due to production tolerances, slight color variations may be detected within individual consignments
- Supplied with mounting hardware; 1) gasket, 2) spring washer, and 3) M8 nut
- CAUTION: Do not solder directly to terminals

CERTIFICATIONS

RoHS
COMPLIANT

DIMENSIONAL CHARACTERISTICS

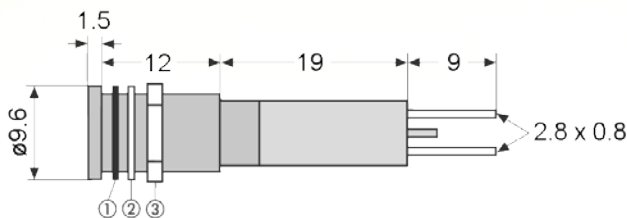

unless otherwise specified, all dimensions are in mm



OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

P: (714) 545-5560 F: (714) 545-6093

W: WWW.WAMCOINC.COM E: INFO@WAMCOINC.COM

WL-1901XX5X Series Rev 2