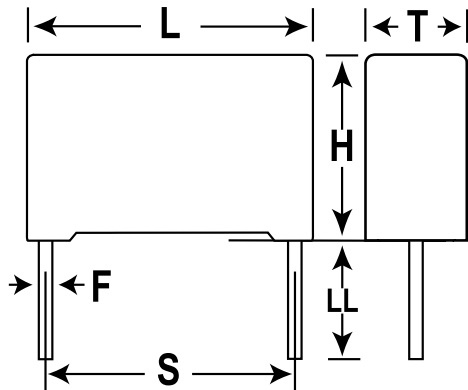


Film, Metallized Polypropylene, Safety, R46\_125C, 0.01 uF, 20%, 560 V, 275 V, 125C, Lead Spacing = 10mm

**Dimensions**

L	13mm +0.2mm
H	11mm +0.1mm
T	5mm +0.2mm
S	10mm +/-0.4mm
LL	30mm +5mm
F	0.6mm +/-0.05mm

**Packaging Specifications**

Packaging:	Bulk
Packaging Quantity:	1500

**General Information**

Dielectric:	Metallized Polypropylene
Style:	Radial
Series:	R46_125C
Features:	Pulse
RoHS:	Yes
Lead:	Wire Leads
Approvals:	ENEC, UL, cUL, CQC

**Specifications**

Capacitance:	0.01 uF
Capacitance Tolerance:	20%
Voltage DC:	560 VDC
Voltage AC:	275 VAC
Temperature Range:	-40/+125C
Rated Temperature:	125C
Dissipation Factor:	0.1% 1kHz
Insulation Resistance:	100 GOhms
Max dVdt:	500 V
Safety Class:	X2