


RF / Coaxial BNC BHD Jack

**RoHS
Compliant**





Specifications:

Connector Type	: BNC Coaxial
Body Style	: Straight Bulkhead Jack
Coaxial Termination	: Solder
Impedance	: 50Ω
Bodies	: Brass per JIS-C3604
Centre Contact	: Brass per JIS-C3604
Contact Plating	: Gold
Frequency Max	: 4GHz
Part to be clean and free of burrs	

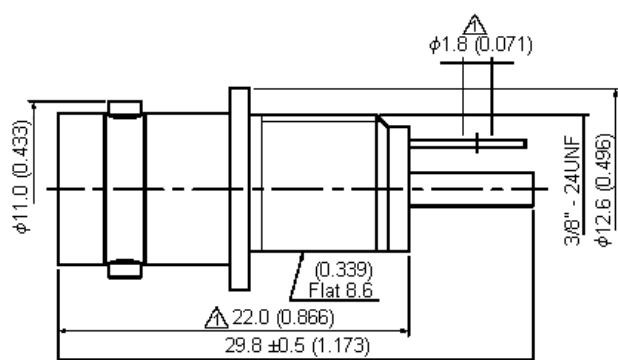

Dimensions : Millimetres (Inches)



Mounting Hole

No.	Description	Material	Finish
1	Washer	Iron	Nickel 100μ" Min.
2	Nut	Brass	
3	Washer		
4	Body II		
5	Washer		
6	BodyI	ABS	None
7	Centre Contact	Brass	Gold

Part Number Table

Description	Part Number
RF / Coaxial BNC BHD Jack Straight 50Ω Solder	13-28

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com

