

Features

Unregulated Converters

- Efficiency 84% Full Load/70% with 20% Load
- Low Deviation (10% ~ 100% Load)
- 1kVDC and 2kVDC Isolation Option
- Safety Certified
- -40°C to +100°C Operating Temperature Range
- 1W SIP7 Package

ECONOLINE

DC/DC-Converter

with 3 year Warranty

RECOM

Description

The RB/E series is an unregulated DC/DC converter in standard SIP7 package style. This series has been designed to offer exceptionally high efficiency at low loads, an extended operating temperature range and low deviation (10% ~ 100%). Uses include applications with restricted energy budget and industrial applications where a high efficiency level is required.

Selection Guide

Part Number	Isolation Voltage (kVDC)	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (typ.)	Capacitive Load (max.)
RB-3.305S/E*	1	3.3	5	200	83%	2200µF
RB-0505S/E*	1	5	5	200	84%	2200µF
RB-1205S/E*	1	12	5	200	84%	2200µF
RB-2405S/E*	1	24	5	200	82%	2200µF

* add Suffix "/H" for 2kVDC Isolation Voltage - e.g. RB-3.305S/EH

* add Suffix "/P" for Continuous Short Protection - e.g. RB-3.305S/EHP, RB-3.305S/EP

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Input Voltage Range	$\pm 10\%$	
Output Voltage Accuracy	$\pm 5\%$ max.	
Line Voltage Regulation	low line to high line at full load	1.2% max.
Load Voltage Regulation	Load Deviation 10% to 100%	12% typ.
Output Ripple and Noise (20MHz BW)	50mVp-p typ., 100mVp-p max.	
Operating Frequency ($V_{in}=\text{nominal input}$)	20kHz min. / 90kHz max.	
Efficiency	see Selection Guide	
Minimum Load = 0%	Specifications valid for 10% minimum load only	
Isolation Voltage	RB-xx05/E	1000 VDC
	RB-xx05/EH	2000 VDC
Isolation Capacitance	75pF max.	
Isolation Resistance	($V_{iso}=500\text{V}$)	10GΩ min.
Short-Circuit Protection	1 second	
Operating Temperature Range	-40°C to +100°C	
Storage Temperature	-55°C to +125°C	
Relative Humidity	95% RH	
Package Weight	2.2g	
MTBF (+25°C)	using MIL-HDBK 217F	3459×10^3 hours
MTBF (+100°C)	using MIL-HDBK 217F	756×10^3 hours


Note: Detailed information see Application Notes chapter "MTBF"

RoHS
2002/95/EC
6/6

EN-60950-1 Certified
UL-60950-1 (pending)

RB/E


Derating-Graph (Ambient Temperature)

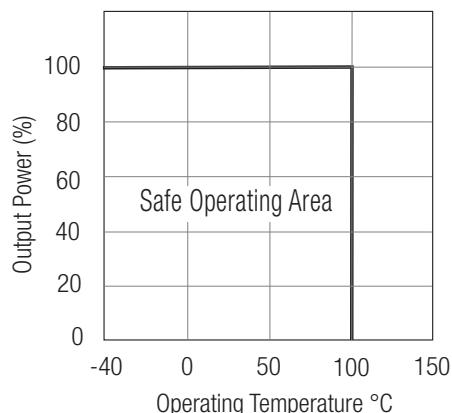



Refer to Application Notes

Typical Characteristics


Tolerance Envelope

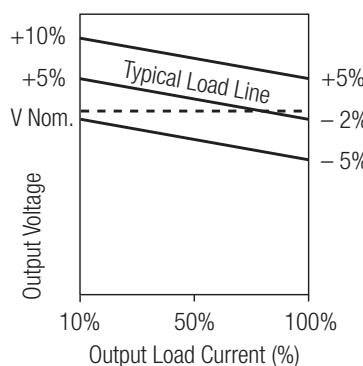


RB-xx05S/E

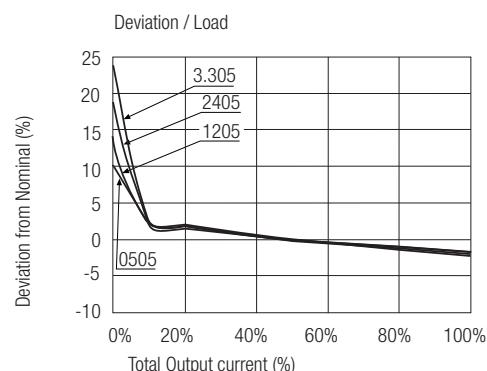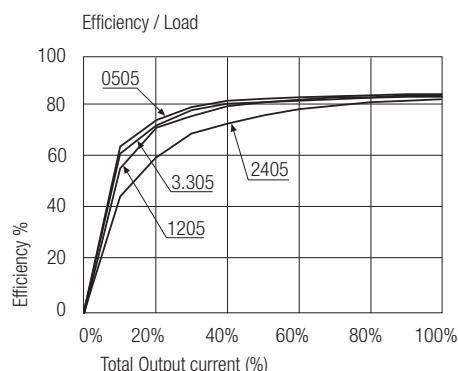

Package Style and Pinning

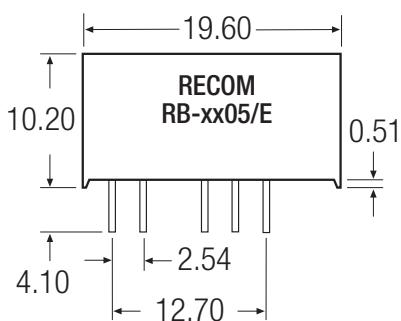

3rd angle projection



Pin Connections	Function
Pin #	5 Pins
1	+Vin
2	-Vin
4	NC
5	-Vout
6	+Vout

NC = No Internal Connection

Unit: mm
Tolerance: ± 0.25 mm

